



Monitoring PaloAlto Firewall

eG Innovations Product Documentation

Table of Contents

CHAPTER 1: INTRODUCTION	1
CHAPTER 2: HOW TO MONITOR PALOALTO FIREWALL USING EG ENTERPRISE	2
2.1 Managing the PaloAlto Firewall	2
2.2 Configuring the tests	3
CHAPTER 1: MONITORING PALOALTO FIREWALL	5
1.1 The Firewall Service layer	6
1.1.1 PaloAlto High Availability Status Test	6
1.1.2 PaloAlto Sessions Test	10
1.1.3 PaloAlto Virtual Systems Test	15
1.1.4 PaloAlto GlobalProtect Gateway Test	20
ABOUT EG INNOVATIONS	25

Table of Figures

Figure 2.1: Adding a PaloAlto Firewall	3
Figure 2.2: List of unconfigured tests for the PaloAlto Firewall	3
Figure 2.3: Configuring the PaloAlto GlobalProtect Gateway test	4
Figure 1.1: The layer model of the Palo Alto firewall	5
Figure 1.2: The Firewall Service layer	6

Chapter 1: Introduction

The Palo Alto firewall - a next generation firewall prevents threats, and safely enables applications, across a versatile set of high-performance use cases (e.g., Internet Gateway, DC, and SP environments). This firewall is based on a consistent *Single Pass architecture* which when implemented on both physical and virtual appliances is designed to secure these appliances from malicious threats and attacks. The Palo Alto firewall attempts to fully classify the traffic passing through the firewall i.e., this single pass architecture allows for precise and flexible control of traffic based on: applications, users and the information content of the traffic i.e., sensitive data patterns and a variety of other context. The single pass architecture's *scan it all scan it once* approach enables high security to the organization.

Uninterrupted firewall operations are imperative to keep hackers and harmful viruses at bay. Any issue in the configuration, state, or resource usage of the firewall can bring its operations to a halt, leaving your network and all mission-critical applications operating within defenceless against malicious viruses and unscrupulous users! It is hence important that the performance of the firewall is monitored 24x7. This is where eG Enterprise helps administrators.

Chapter 2: How to Monitor PaloAlto Firewall Using eG Enterprise

eG Enterprise monitors the Palo Alto Firewall using an eG external agent that is deployed on a remote host. This eG agent polls the SNMP MIB of the firewall to fetch the statistics related to the firewall at configured intervals. Before attempting to monitor the firewall, ensure that the firewall is SNMP-enabled.

2.1 Managing the PaloAlto Firewall

eG Enterprise can automatically discover the PaloAlto Firewall and also lets you to manually add the component if the firewall is not discovered. To manage a PaloAlto Firewall component, do the following:

1. Log into the eG administrative interface.
2. If the PaloAlto Firewall is already discovered, then directly proceed towards managing it using the **COMPONENTS – MANAGE/UNMANAGE** page.
3. However, if it is yet to be discovered, then run discovery (Infrastructure -> Components -> Discover) to get it discovered or add the component manually using the **COMPONENTS** page (Infrastructure -> Components -> Add/Modify). Remember that components manually added are managed automatically. Discovered components, however, are managed using the **COMPONENTS – MANAGE / UNMANAGE** page.
4. To add the PaloAlto Firewall component manually, follow the Components -> Add/Modify menu sequence in the **Infrastructure** tile of the **Admin** menu.
5. In the **COMPONENT** page that appears next, select *PaloAlto Firewall* as the **Component type**. Then, click the **Add New Component** button. This will invoke Figure 2.1.

COMPONENT

This page enables the administrator to provide the details of a new component

Category	Component type
All	PaloAlto Firewall
Component information	
Host IP/Name	192.168.10.1
Nick name	paloaltofire
Monitoring approach	
External agents	192.168.8.202 pvs_10.111
Add	

Figure 2.1: Adding a PaloAlto Firewall

- Specify the **Host IP/Name** and **Nick name** of the PaloAlto Firewall in Figure 2.1. Then, click the **Add** button to add the firewall for monitoring.

2.2 Configuring the tests

- When you attempt to signout of the eG administrative interface, a list of unconfigured tests listing the tests requiring manual configuration, will appear (see Figure 2.2).

List of unconfigured tests for 'PaloAlto Firewall'

Performance			Host Processes			Device Uptime		
Host Storage	Host Processes	Network Interfaces	Host Storage	Host Processes	Network Interfaces	Host Storage	Host Processes	Network Interfaces
PaloAlto High Availability Status	PaloAlto Sessions	PaloAlto Sessions	PaloAlto GlobalProtect Gateway	PaloAlto GlobalProtect Gateway	PaloAlto GlobalProtect Gateway	PaloAlto Virtual Systems	PaloAlto Virtual Systems	PaloAlto Virtual Systems

Figure 2.2: List of unconfigured tests for the PaloAlto Firewall

- Click on any test in the list of unconfigured tests. For instance, click on the **PaloAlto GlobalProtect Gateway** test to configure it. In the page that appears, specify the parameters as shown in Figure 2.3.

TEST PERIOD	5 mins
HOST	192.168.10.1
PORT	NULL
SNMPPORT	161
DATA OVER TCP	<input type="radio"/> Yes <input checked="" type="radio"/> No
TIMEOUT	10
SNMPVERSION	v3
CONTEXT	none
USERNAME	none
AUTHPASS	*****
CONFIRM PASSWORD	*****
AUTHTYPE	MD5
ENCRYPTFLAG	<input checked="" type="radio"/> Yes <input type="radio"/> No
ENCRYPTYTYPE	DES
ENCRYPTPASSWORD	*****
CONFIRM PASSWORD	*****

Figure 2.3: Configuring the PaloAlto GlobalProtect Gateway test

3. To know how to configure the PaloAlto Firewall specific tests, refer to [Monitoring PaloAlto Firewalls](#) chapter.
4. Once again, try to signout of the administrative interface. This time you will be prompted to configure the **Host Processes** test. To know the details on configuring this test, refer to the *Monitoring AS400 Server* document.
5. Finally, signout of the eG administrative interface.

Chapter 1: Monitoring PaloAlto Firewall

eG Enterprise provides a specialized Palo Alto Firewall monitoring model (see Figure 1.1), which periodically polls the SNMP MIB of the firewall to measure the high availability status, session utilization, gateway utilization, and the tunnels that were created on the firewall, and notifies administrators of potential threats or configuration issues with the firewall.

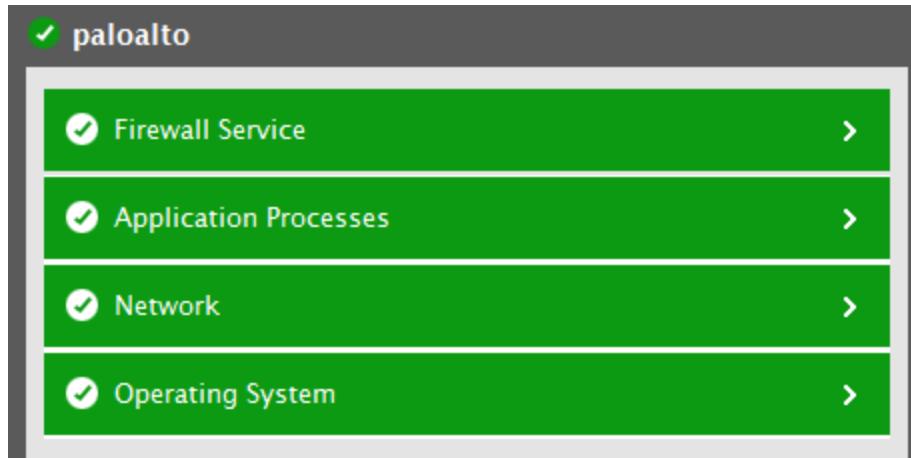


Figure 1.1: The layer model of the Palo Alto firewall

Using the metrics reported , administrators can find quick and accurate answers to the following performance issues:

- Is the firewall available over the network? How is the network connectivity to the firewall – solid or flaky?
- Is the high availability of the firewall enabled or disabled? If enabled, what is the mode of high availability configuration?
- How many sessions are currently active on the firewall? Which type of sessions are causing network overload - is it TCP? UDP? SSL Proxy?
- How many tunnels are active on a GlobalProtect subscription? How well the GlobalProtect gateways are utilized?
- How many sessions are active on each virtual system of the firewall? What is the session utilization on each virtual system?

The *Operating System*, *Network* and *Application Processes* layers of the Palo Alto Firewall model is similar to that of a Windows server model. Since these tests have been dealt with in the *Monitoring Unix and Windows Servers* document, Section 1.1 focuses on the *Firewall Service* layer.

1.1 The Firewall Service layer

This layer tracks the high availability status of the firewall and the mode using which the high availability setup is configured, the active sessions count, the active sessions count and session utilization on each virtual system, number of tunnels when the GlobalProtect subscription is available, GlobalProtect gateway utilization etc.



Figure 1.2: The Firewall Service layer

1.1.1 PaloAlto High Availability Status Test

High availability (HA) is a configuration in which two firewalls are placed in a group and their configuration is synchronized to prevent a single point of failure on your network. A heartbeat connection between the firewall peers ensures seamless failover in the event that a peer goes down. Setting up two firewalls in an HA pair provides redundancy and allows you to ensure business continuity.

The Palo Alto firewalls can be deployed as high availability (HA) pair with session and configuration synchronization to provide uninterrupted operation in any session. The high availability configuration always ensures that one of the two firewalls is available for maintaining the network traffic so that the downtime of the network is reduced considerably. The firewalls can be configured as stateful Active/Passive or Active/Active high availability pair.

If the high availability of the firewall is challenged, then the your environment may be rendered defenceless against unsavory virus attacks and unauthorized access, both of which can cause irreparable damage. Hence, to make sure that your environment stays protected 24X7x365 from network threats, it is necessary to monitor the high availability status of the Palo Alto Firewall. The **PaloAlto High Availability Status** test exactly helps you in this regard.

By continuously monitoring the Palo Alto Firewall, this test reveals the high availability status of the firewall and the mode in which the firewall is configured for high availability.

Target of the test : A Palo Alto Firewall

Agent deploying the test : An external agent

Outputs of the test : One set of results for the firewall being monitored.

Availability Status parameters to be configured for palo (PaloAlto Firewall)

TEST PERIOD	5 mins	
HOST	192.168.8.224	
PORT	NULL	
SNMPPORT	161	
DATA OVER TCP	<input type="radio"/> Yes	<input checked="" type="radio"/> No
TIMEOUT	10	
SNMPVERSION	v3	
CONTEXT	none	
USERNAME	sam	
AUTHPASS	*****	
CONFIRM PASSWORD	*****	
AUTHTYPE	MD5	
ENCRYPTFLAG	<input checked="" type="radio"/> Yes	<input type="radio"/> No
ENCRYPTIONTYPE	DES	
ENCRYPTPASSWORD	*****	
CONFIRM PASSWORD	*****	
Update		

Configurable parameters for the test

Parameter	Description
Test Period	How often should the test be executed.
Host	The IP address of the host for which this test is to be configured.
Port	Enter the port number at which the specified host listens to. By default, this is set to

Parameter	Description
	<i>Null.</i>
SNMPPort	The port at which the monitored target exposes its SNMP MIB; The default value is 161.
SNMPVersion	By default, the eG agent supports SNMP version 1. Accordingly, the default selection in the SNMPVersion list is v1 . However, if a different SNMP framework is in use in your environment, say SNMP v2 or v3 , then select the corresponding option from this list.
SNMPCommunity	The SNMP community name that the test uses to communicate with the firewall. This parameter is specific to SNMP v1 and v2 only. Therefore, if the SNMPVersion chosen is v3 , then this parameter will not appear.
UserName	This parameter appears only when v3 is selected as the SNMPVersion. SNMP version 3 (SNMPv3) is an extensible SNMP Framework which supplements the SNMPv2 Framework, by additionally supporting message security, access control, and remote SNMP configuration capabilities. To extract performance statistics from the MIB using the highly secure SNMP v3 protocol, the eG agent has to be configured with the required access privileges – in other words, the eG agent should connect to the MIB using the credentials of a user with access permissions to be MIB. Therefore, specify the name of such a user against this parameter.
Context	This parameter appears only when v3 is selected as the SNMPVersion. An SNMP context is a collection of management information accessible by an SNMP entity. An item of management information may exist in more than one context and an SNMP entity potentially has access to many contexts. A context is identified by the SNMPEngineID value of the entity hosting the management information (also called a contextEngineID) and a context name that identifies the specific context (also called a contextName). If the Username provided is associated with a context name, then the eG agent will be able to poll the MIB and collect metrics only if it is configured with the context name as well. In such cases therefore, specify the context name of the Username in the Context text box. By default, this parameter is set to <i>none</i> .
AuthPass	Specify the password that corresponds to the above-mentioned Username. This parameter once again appears only if the SNMPVersion selected is v3 .
Confirm Password	Confirm the AuthPass by retying it here.
AuthType	This parameter too appears only if v3 is selected as the SNMPversion. From the Authtype list box, choose the authentication algorithm using which SNMP v3 converts the specified username and password into a 32-bit format to ensure security of SNMP transactions. You can choose between the following options:

Parameter	Description
	<ul style="list-style-type: none"> MD5 – Message Digest Algorithm SHA – Secure Hash Algorithm
EncryptFlag	This flag appears only when v3 is selected as the SNMPversion. By default, the eG agent does not encrypt SNMP requests. Accordingly, the this flag is set to No by default. To ensure that SNMP requests sent by the eG agent are encrypted, select the Yes option.
EncryptType	If this EncryptFlag is set to Yes , then you will have to mention the encryption type by selecting an option from the EncryptType list. SNMP v3 supports the following encryption types: <ul style="list-style-type: none"> DES – Data Encryption Standard AES – Advanced Encryption Standard
EncryptPassword	Specify the encryption password here.
Confirm Password	Confirm the encryption password by retyping it here.
Timeout	Specify the duration (in seconds) within which the SNMP query executed by this test should time out in this text box. The default is 10 seconds.
Data Over TCP	By default, in an IT environment, all data transmission occurs over UDP. Some environments however, may be specifically configured to offload a fraction of the data traffic – for instance, certain types of data traffic or traffic pertaining to specific components – to other protocols like TCP, so as to prevent UDP overloads. In such environments, you can instruct the eG agent to conduct the SNMP data traffic related to the monitored target over TCP (and not UDP). For this, set this flag to Yes . By default, this flag is set to No .

Measurements made by the test

Measurement	Description	Measurement Unit	Interpretation						
High availability status	Indicates the high availability status of the firewall.		<p>The numeric values that correspond to these states are as follows:</p> <table border="1"> <thead> <tr> <th>State</th><th>Numeric Value</th></tr> </thead> <tbody> <tr> <td>Disabled</td><td>0</td></tr> <tr> <td>Enabled</td><td>100</td></tr> </tbody> </table>	State	Numeric Value	Disabled	0	Enabled	100
State	Numeric Value								
Disabled	0								
Enabled	100								

Measurement	Description	Measurement Unit	Interpretation								
			<p>Note:</p> <p>By default, this measure reports the above-mentioned States to indicate whether/not the high availability is enabled for the PaloAlto firewall . However, in the graph of this measure, the same will be represented using the numeric equivalents – 0 and 100 only.</p>								
High availability mode	Indicates the mode in which the firewall is configured for high availability.		<p>The numeric values that correspond to these modes are as follows:</p> <table border="1"> <thead> <tr> <th>Mode</th><th>Numeric Value</th></tr> </thead> <tbody> <tr> <td>Disabled</td><td>0</td></tr> <tr> <td>Active-Passive</td><td>1</td></tr> <tr> <td>Active-Active</td><td>2</td></tr> </tbody> </table> <p>Note:</p> <p>By default, this measure reports the above-mentioned Modes to indicate in which mode the firewall is configured for high availability. However, in the graph of this measure, the same will be represented using the numeric equivalents – 0 and 2 only.</p>	Mode	Numeric Value	Disabled	0	Active-Passive	1	Active-Active	2
Mode	Numeric Value										
Disabled	0										
Active-Passive	1										
Active-Active	2										

1.1.2 PaloAlto Sessions Test

The Palo Alto firewall lets users to create sessions using different protocols such as Transmission Control Protocol (TCP), User Datagram Protocol (UDP), Internet Control Message Protocol (ICMP) or SSL Proxy connection. These communication protocols ensure reliability, end-to-end delivery and flow and error control of data during the user sessions.

Frequent overload condition on a firewall can actually cause irreversible damage to the firewall. If the Palo Alto Firewall is overloaded with sessions, it may actually slow down the request processing capability of the firewall. Under such circumstances, administrators will have to identify the type of sessions that are causing the overload – are they TCP sessions? UDP sessions? ICMP sessions?

SSL Proxy sessions? – and investigate why the count of such sessions are unusually high on the firewall. Moreover it is the onus of the administrators to keep track of the session utilization as well. If the session utilization is high throughout, it may result in overload condition with the sessions hogging excessive network bandwidth. This may in turn cause slowdown of the firewall which when left unattended will lead to performance degradation. Administrators should therefore constantly monitor the sessions of the firewall and figure out what type of sessions are frequently causing overload. The **PaloAlto Sessions** test helps administrators in this regard.

This test monitors the sessions on the Palo Alto Firewall and reports the number of active TCP, UDP, ICMP and SSL Proxy sessions. In addition, this test reveals the overall session utilization and the SSL Proxy session utilization. This way, administrators can keep track of sudden spikes in the number of sessions and proactively be alerted to overload condition, if any.

Target of the test : A Palo Alto Firewall

Agent deploying the test : An external agent

Outputs of the test : One set of results for the firewall being monitored.

sions parameters to be configured for palo (PaloAlto Firewall)

TEST PERIOD	5 mins
HOST	192.168.8.224
PORT	NULL
SNMPPORT	161
DATA OVER TCP	<input type="radio"/> Yes <input checked="" type="radio"/> No
TIMEOUT	10
SNMPVERSION	v3
CONTEXT	none
USERNAME	sam
AUTHPASS	*****
CONFIRM PASSWORD	*****
AUTHTYPE	MD5
ENCRYPTFLAG	<input checked="" type="radio"/> Yes <input type="radio"/> No
ENCRYPTTYPE	DES
ENCRYPTPASSWORD	*****
CONFIRM PASSWORD	*****

Configurable parameters for the test

Parameter	Description
Test Period	How often should the test be executed.
Host	The IP address of the host for which this test is to be configured.
Port	Enter the port number at which the specified host listens to. By default, this is <i>Null</i> .
SNMPPort	The port at which the monitored target exposes its SNMP MIB; The default value is 161.

Parameter	Description
SNMPVersion	By default, the eG agent supports SNMP version 1. Accordingly, the default selection in the SNMPVersion list is v1 . However, if a different SNMP framework is in use in your environment, say SNMP v2 or v3 , then select the corresponding option from this list.
SNMPCommunity	The SNMP community name that the test uses to communicate with the firewall. This parameter is specific to SNMP v1 and v2 only. Therefore, if the SNMPVersion chosen is v3 , then this parameter will not appear.
UserName	This parameter appears only when v3 is selected as the SNMPVersion. SNMP version 3 (SNMPv3) is an extensible SNMP Framework which supplements the SNMPv2 Framework, by additionally supporting message security, access control, and remote SNMP configuration capabilities. To extract performance statistics from the MIB using the highly secure SNMP v3 protocol, the eG agent has to be configured with the required access privileges – in other words, the eG agent should connect to the MIB using the credentials of a user with access permissions to be MIB. Therefore, specify the name of such a user against this parameter.
Context	This parameter appears only when v3 is selected as the SNMPVersion. An SNMP context is a collection of management information accessible by an SNMP entity. An item of management information may exist in more than one context and an SNMP entity potentially has access to many contexts. A context is identified by the SNMPEngineID value of the entity hosting the management information (also called a contextEngineID) and a context name that identifies the specific context (also called a contextName). If the Username provided is associated with a context name, then the eG agent will be able to poll the MIB and collect metrics only if it is configured with the context name as well. In such cases therefore, specify the context name of the Username in the Context text box. By default, this parameter is set to <i>none</i> .
AuthPass	Specify the password that corresponds to the above-mentioned Username. This parameter once again appears only if the SNMPVersion selected is v3 .
Confirm Password	Confirm the AuthPass by retying it here.
AuthType	This parameter too appears only if v3 is selected as the SNMPversion. From the Authtype list box, choose the authentication algorithm using which SNMP v3 converts the specified username and password into a 32-bit format to ensure security of SNMP transactions. You can choose between the following options: <ul style="list-style-type: none"> • MD5 – Message Digest Algorithm • SHA – Secure Hash Algorithm
EncryptFlag	This flag appears only when v3 is selected as the SNMPversion. By default, the eG

Parameter	Description
	agent does not encrypt SNMP requests. Accordingly, the this flag is set to No by default. To ensure that SNMP requests sent by the eG agent are encrypted, select the Yes option.
EncryptType	If this EncryptFlag is set to Yes , then you will have to mention the encryption type by selecting an option from the EncryptType list. SNMP v3 supports the following encryption types: <ul style="list-style-type: none"> • DES – Data Encryption Standard • AES – Advanced Encryption Standard
EncryptPassword	Specify the encryption password here.
Confirm Password	Confirm the encryption password by retyping it here.
Timeout	Specify the duration (in seconds) within which the SNMP query executed by this test should time out in this text box. The default is 10 seconds.
Data Over TCP	By default, in an IT environment, all data transmission occurs over UDP. Some environments however, may be specifically configured to offload a fraction of the data traffic – for instance, certain types of data traffic or traffic pertaining to specific components – to other protocols like TCP, so as to prevent UDP overloads. In such environments, you can instruct the eG agent to conduct the SNMP data traffic related to the monitored target over TCP (and not UDP). For this, set this flag to Yes . By default, this flag is set to No .

Measurements made by the test

Measurement	Description	Measurement Unit	Interpretation
Active sessions	Indicates the total number of sessions that are currently active on the firewall.	Number	This measure is a good indicators of session load on the firewall.
Active UDP sessions	Indicates the number of UDP sessions that are currently active on the firewall.	Number	A high value of this measure could indicate a UDP session overload on the firewall.
Active TCP sessions	Indicates the number of TCP sessions that are currently active on the	Number	A high value of this measure could indicate a TCP session overload on the firewall.

Measurement	Description	Measurement Unit	Interpretation
	firewall.		
Active ICMP sessions	Indicates the number of ICMP sessions that are currently active on the firewall.	Number	A high value of this measure could indicate an ICMP session overload on the firewall.
Active SSL Proxy sessions	Indicates the number of SSL Proxy sessions that are currently active on the firewall.	Number	A high value of this measure could indicate SSL Proxy session overload on the firewall.
Session utilization	Indicates the utilization percentage of the sessions on the firewall.	Percentage	A high value for this measure indicates an overload condition on the firewall.
SSL Proxy session utilization	Indicates the utilization percentage of SSL Proxy sessions on the firewall.	Percentage	A high value for this measure could indicate an overload of the SSL Proxy sessions on the firewall.

1.1.3 PaloAlto Virtual Systems Test

Virtual systems are multiple, logical firewall instances within a single Palo Alto Networks physical firewall. Each virtual system is an independent, separately managed logical firewall with its traffic kept separate from that of others. A typical scenario where virtual systems are used is a deployment scenario i.e., two physical firewalls (a HA pair) can be configured as virtual systems for use by tenants of a Managed Security Service Provider. In such environments, administrators can exist in different levels of the system. With the help of virtual systems, administrators can control access to the device level as well as specific management functions (enable, disable, hide) for each firewall customer or user. The flexibility and efficiencies of virtual systems present managed service providers (MSP) and enterprises with some very attractive possibilities to enhance business efficiencies such as improved scalability, low capital expenditure and reduced operational cost.

For efficiently monitoring the traffic through the physical firewall, each administrator of the environment can be assigned with a limited number of virtual systems. If the super administrator of the environment wants to figure out how well sessions are utilized in a virtual server, then he/she can monitor the individual virtual systems and figure out the session load on each virtual system. By continuously monitoring the virtual systems, the super administrator can easily identify the virtual system that is overloaded and further investigate the real reason behind such overload. The

PaloAlto Virtual Systems test helps administrators to continuously monitor the session load on the virtual systems.

For each virtual system configured on the Palo Alto Firewall, this test reports the number of active sessions that are active on the virtual system and the percentage of sessions utilized. This test provides administrators effective pointers on the current session load on the virtual systems and identify overloaded virtual systems, if any.

Target of the test : A Palo Alto Firewall

Agent deploying the test : An external agent

Outputs of the test : One set of results for each virtual system configured on the target firewall being monitored.

Virtual Systems parameters to be configured for palo (PaloAlto Firewall)

TEST PERIOD	5 mins
HOST	192.168.8.224
PORT	NULL
SNMPPORT	161
DATA OVER TCP	<input type="radio"/> Yes <input checked="" type="radio"/> No
TIMEOUT	10
SNMPVERSION	v3
CONTEXT	none
USERNAME	sam
AUTHPASS	*****
CONFIRM PASSWORD	*****
AUTHTYPE	MD5
ENCRYPTFLAG	<input checked="" type="radio"/> Yes <input type="radio"/> No
ENCRYPTTYPE	DES
ENCRYPTPASSWORD	*****
CONFIRM PASSWORD	*****

Update

Configurable parameters for the test

Parameter	Description
Test Period	How often should the test be executed.
Host	The IP address of the host for which this test is to be configured.
Port	Enter the port number at which the specified host listens to. By default, this is <i>Null</i> .
SNMPPort	The port at which the monitored target exposes its SNMP MIB; The default value is 161.

Parameter	Description
SNMPVersion	By default, the eG agent supports SNMP version 1. Accordingly, the default selection in the SNMPVersion list is v1 . However, if a different SNMP framework is in use in your environment, say SNMP v2 or v3 , then select the corresponding option from this list.
SNMPCommunity	The SNMP community name that the test uses to communicate with the firewall. This parameter is specific to SNMP v1 and v2 only. Therefore, if the SNMPVersion chosen is v3 , then this parameter will not appear.
UserName	This parameter appears only when v3 is selected as the SNMPVersion. SNMP version 3 (SNMPv3) is an extensible SNMP Framework which supplements the SNMPv2 Framework, by additionally supporting message security, access control, and remote SNMP configuration capabilities. To extract performance statistics from the MIB using the highly secure SNMP v3 protocol, the eG agent has to be configured with the required access privileges – in other words, the eG agent should connect to the MIB using the credentials of a user with access permissions to be MIB. Therefore, specify the name of such a user against this parameter.
Context	This parameter appears only when v3 is selected as the SNMPVersion. An SNMP context is a collection of management information accessible by an SNMP entity. An item of management information may exist in more than one context and an SNMP entity potentially has access to many contexts. A context is identified by the SNMPEngineID value of the entity hosting the management information (also called a contextEngineID) and a context name that identifies the specific context (also called a contextName). If the Username provided is associated with a context name, then the eG agent will be able to poll the MIB and collect metrics only if it is configured with the context name as well. In such cases therefore, specify the context name of the Username in the Context text box. By default, this parameter is set to <i>none</i> .
AuthPass	Specify the password that corresponds to the above-mentioned Username. This parameter once again appears only if the SNMPVersion selected is v3 .
Confirm Password	Confirm the AuthPass by retying it here.
AuthType	This parameter too appears only if v3 is selected as the SNMPversion. From the Authtype list box, choose the authentication algorithm using which SNMP v3 converts the specified username and password into a 32-bit format to ensure security of SNMP transactions. You can choose between the following options: <ul style="list-style-type: none"> • MD5 – Message Digest Algorithm • SHA – Secure Hash Algorithm
EncryptFlag	This flag appears only when v3 is selected as the SNMPversion. By default, the eG

Parameter	Description
	agent does not encrypt SNMP requests. Accordingly, the this flag is set to No by default. To ensure that SNMP requests sent by the eG agent are encrypted, select the Yes option.
EncryptType	If this EncryptFlag is set to Yes , then you will have to mention the encryption type by selecting an option from the EncryptType list. SNMP v3 supports the following encryption types: <ul style="list-style-type: none"> • DES – Data Encryption Standard • AES – Advanced Encryption Standard
EncryptPassword	Specify the encryption password here.
Confirm Password	Confirm the encryption password by retyping it here.
Timeout	Specify the duration (in seconds) within which the SNMP query executed by this test should time out in this text box. The default is 10 seconds.
Data Over TCP	By default, in an IT environment, all data transmission occurs over UDP. Some environments however, may be specifically configured to offload a fraction of the data traffic – for instance, certain types of data traffic or traffic pertaining to specific components – to other protocols like TCP, so as to prevent UDP overloads. In such environments, you can instruct the eG agent to conduct the SNMP data traffic related to the monitored target over TCP (and not UDP). For this, set this flag to Yes . By default, this flag is set to No .

Measurements made by the test

Measurement	Description	Measurement Unit	Interpretation
Active sessions	Indicates the number of sessions that are active on this virtual system.	Number	This measure is a good indicator of the session load on the virtual system. Compare the value of this measure across virtual systems to identify the virtual system that is constantly overloaded.
Session utilization	Indicates the percentage of utilization of session on this virtual system.	Percentage	A high value for this measure is an indication of overload condition on the virtual system.

1.1.4 PaloAlto GlobalProtect Gateway Test

The security subscriptions on the Palo Alto Firewall allows you to safely enable applications, users and content by adding natively integrated protection from known and unknown threats both on and off the network. These security subscriptions are purpose-built to share context and prevent threats at every stage of an attack, allowing you to enable singular policies and automated protection that secure your network and remote workforce while simplifying management and enabling your business. Some of these subscriptions are:

- AutoFocus
- GlobalProtect
- URL Filtering PAN-DB
- Threat Prevention and
- WildFire

In a corporate environment, most of the employees prefer to work outside of their corporate boundaries due to various reasons like travel, work from home facility etc. Though this increased workforce mobility would increase the productivity of the employees along with flexibility, it also simultaneously introduces significant security threats to the corporate environment. The GlobalProtect provides a complete infrastructure for managing the mobile workforce of a corporate by enabling secure access to all the users, regardless of what devices they are using or where they are located. The GlobalProtect infrastructure comprises of the following components:

- GlobalProtect Portal
- GlobalProtect gateways
- GlobalProtect Client and
- GlobalProtect Mobile Security

Every client system that participates in the GlobalProtect network receives configuration information from the portal, including information about available gateways as well as any client certificates that may be required to connect to the GlobalProtect gateway(s) and/or the Mobile Security Manager. In addition, the portal controls the behavior and distribution of the GlobalProtect agent software to both Mac and Windows laptops. (On mobile devices, the GlobalProtect app is distributed through the Apple App Store for iOS devices or through Google Play for Android devices). If you are using the Host Information Profile (HIP) feature, the portal also defines what information to collect from the host, including any custom information you require. The two types of configuring the GlobalProtect gateway are:

- **External gateways** - Provide security enforcement and/or virtual private network (VPN) access for your remote users. VPN access is provided through an IPSec or SSL tunnel between the client and a tunnel interface on the gateway firewall.
- **Internal gateways** - An interface on the internal network configured as a GlobalProtect gateway for applying security policy for access to internal resources. When used in conjunction with User-ID and/or HIP checks, an internal gateway can be used to provide a secure, accurate method of identifying and controlling traffic by user and/or device state. Internal gateways are useful in sensitive environments where authenticated access to critical resources is required. You can configure an internal gateway in either tunnel mode or non-tunnel mode.

Whenever an infrastructure is accessed from an external network, administrators should keep constant vigil on the traffic flowing through the established tunnels. The same logic applies to the tunnels that were created to access an infrastructure that is guarded using the Palo Alto Firewall with the GlobalProtect subscription. If the number of tunnels suddenly increases or if the GlobalProtect gateway is utilized to the maximum frequently, then the firewall may not function efficiently resulting in a few tunnels hogging the bandwidth resources and choking the network! To avoid this, administrators should periodically check the number of tunnels and the utilization of the GlobalProtect gateways. This is where the **PaloAlto GlobalProtect Gateway Utilizations** test helps!

This test continuously monitors the GlobalProtect subscription enabled Palo Alto Firewall and reports the number of tunnels created on the firewall using the GlobalProtect subscription and the utilization of the GlobalProtect gateways. Using this test, administrators can easily identify malicious threats to their network if the number of tunnels are abnormally high and fine-tune the number of GlobalProtect gateways if the gateway utilization is high throughout.

Note:

This test will report metrics only if you have subscribed to GlobalProtect.

Target of the test : A Palo Alto Firewall

Agent deploying the test : An external agent

Outputs of the test : One set of results for the firewall being monitored.

Configurable parameters for the test

Parameter	Description
Test Period	How often should the test be executed.

Parameter	Description
Host	The IP address of the host for which this test is to be configured.
Port	Enter the port number at which the specified host listens to. By default, this is <i>Null</i> .
SNMPPort	The port at which the monitored target exposes its SNMP MIB; The default value is 161.
SNMPVersion	By default, the eG agent supports SNMP version 1. Accordingly, the default selection in the SNMPVersion list is v1 . However, if a different SNMP framework is in use in your environment, say SNMP v2 or v3 , then select the corresponding option from this list.
SNMPCommunity	The SNMP community name that the test uses to communicate with the firewall. This parameter is specific to SNMP v1 and v2 only. Therefore, if the SNMPVersion chosen is v3 , then this parameter will not appear.
UserName	This parameter appears only when v3 is selected as the SNMPVersion. SNMP version 3 (SNMPv3) is an extensible SNMP Framework which supplements the SNMPv2 Framework, by additionally supporting message security, access control, and remote SNMP configuration capabilities. To extract performance statistics from the MIB using the highly secure SNMP v3 protocol, the eG agent has to be configured with the required access privileges – in other words, the eG agent should connect to the MIB using the credentials of a user with access permissions to be MIB. Therefore, specify the name of such a user against this parameter.
Context	This parameter appears only when v3 is selected as the SNMPVersion. An SNMP context is a collection of management information accessible by an SNMP entity. An item of management information may exist in more than one context and an SNMP entity potentially has access to many contexts. A context is identified by the SNMPEngineID value of the entity hosting the management information (also called a contextEngineID) and a context name that identifies the specific context (also called a contextName). If the Username provided is associated with a context name, then the eG agent will be able to poll the MIB and collect metrics only if it is configured with the context name as well. In such cases therefore, specify the context name of the Username in the Context text box. By default, this parameter is set to <i>none</i> .
AuthPass	Specify the password that corresponds to the above-mentioned Username. This parameter once again appears only if the SNMPVersion selected is v3 .
Confirm Password	Confirm the AuthPass by retying it here.
AuthType	This parameter too appears only if v3 is selected as the SNMPversion. From the Authtype list box, choose the authentication algorithm using which SNMP v3 converts the specified username and password into a 32-bit format to ensure security of SNMP

Parameter	Description
	<p>transactions. You can choose between the following options:</p> <ul style="list-style-type: none"> • MD5 – Message Digest Algorithm • SHA – Secure Hash Algorithm
EncryptFlag	This flag appears only when v3 is selected as the SNMPversion. By default, the eG agent does not encrypt SNMP requests. Accordingly, the this flag is set to No by default. To ensure that SNMP requests sent by the eG agent are encrypted, select the Yes option.
EncryptType	If this EncryptFlag is set to Yes , then you will have to mention the encryption type by selecting an option from the EncryptType list. SNMP v3 supports the following encryption types:
	<ul style="list-style-type: none"> • DES – Data Encryption Standard • AES – Advanced Encryption Standard
EncryptPassword	Specify the encryption password here.
Confirm Password	Confirm the encryption password by retyping it here.
Timeout	Specify the duration (in seconds) within which the SNMP query executed by this test should time out in this text box. The default is 10 seconds.
Data Over TCP	By default, in an IT environment, all data transmission occurs over UDP. Some environments however, may be specifically configured to offload a fraction of the data traffic – for instance, certain types of data traffic or traffic pertaining to specific components – to other protocols like TCP, so as to prevent UDP overloads. In such environments, you can instruct the eG agent to conduct the SNMP data traffic related to the monitored target over TCP (and not UDP). For this, set this flag to Yes . By default, this flag is set to No .

Measurements made by the test

Measurement	Description	Measurement unit	Interpretation
Active tunnels	Indicates the number of tunnels that are currently active on the firewall using the GlobalProtect subscription.	Number	If the value of this measure is consistently high or if the value of this measure exceeds the maximum number of tunnels that are allowed, then administrators should analyze

Measurement	Description	Measurement unit	Interpretation
			what exactly has increased the number of tunnels? - is the genuine user activity the real reason behind the increase in tunnels or is there any malicious activity or spam that is increasing the number of tunnels?
GlobalProtect gateway utilization	Indicates the percentage utilization of the GlobalProtect gateway.	Percentage	A consistently high value for this measure is a cause of concern. Administrators should therefore consider increasing the number of GlobalProtect gateways.

About eG Innovations

eG Innovations provides intelligent performance management solutions that automate and dramatically accelerate the discovery, diagnosis, and resolution of IT performance issues in on-premises, cloud and hybrid environments. Where traditional monitoring tools often fail to provide insight into the performance drivers of business services and user experience, eG Innovations provides total performance visibility across every layer and every tier of the IT infrastructure that supports the business service chain. From desktops to applications, from servers to network and storage, from virtualization to cloud, eG Innovations helps companies proactively discover, instantly diagnose, and rapidly resolve even the most challenging performance and user experience issues.

eG Innovations is dedicated to helping businesses across the globe transform IT service delivery into a competitive advantage and a center for productivity, growth and profit. Many of the world's largest businesses use eG Enterprise to enhance IT service performance, increase operational efficiency, ensure IT effectiveness and deliver on the ROI promise of transformational IT investments across physical, virtual and cloud environments.

To learn more visit www.eginnovations.com.

Contact Us

For support queries, email support@eginnovations.com.

To contact eG Innovations sales team, email sales@eginnovations.com.

Copyright © 2018 eG Innovations Inc. All rights reserved.

This document may not be reproduced by any means nor modified, decompiled, disassembled, published or distributed, in whole or in part, or translated to any electronic medium or other means without the prior written consent of eG Innovations. eG Innovations makes no warranty of any kind with regard to the software and documentation, including, but not limited to, the implied warranties of merchantability and fitness for a particular purpose. The information contained in this document is subject to change without notice.

All right, title, and interest in and to the software and documentation are and shall remain the exclusive property of eG Innovations. All trademarks, marked and not marked, are the property of their respective owners. Specifications subject to change without notice.