



## Monitoring Rocket UniVerse Database Server

eG Innovations Product Documentation

# Table of Contents

---

CHAPTER 1: INTRODUCTION .....	1
CHAPTER 2: HOW DOES EG ENTERPRISE MONITOR THE UNIVERSE DATABASE SERVER? ..	2
2.1 Managing the UniVerse Database Server .....	2
CHAPTER 3: MONITORING THE UNIVERSE DATABASE SERVER .....	4
3.1 Universe Database Service Layer .....	4
3.1.1 UniVerse Database Sessions Test .....	4
3.1.2 UniVerse Database Active Group Locks Test .....	9
3.1.3 UniVerse Database Active Record Locks Test .....	12
ABOUT EG INNOVATIONS .....	17

## Table of Figures

---

Figure 2.1: Adding an UniVerse Database server .....	2
Figure 2.2: List of Unconfigured tests to be configured for the UniVerse Database server .....	3
Figure 3.1: Layer model of the UniVerse Database server .....	4

## Chapter 1: Introduction

UniVerse is a database, and also a platform for powerful and feature rich business applications. UniVerse is a MultiValue Database Management System (MVDBMS). MultiValued data structures support nested entities removing the need to normalize information. These provide storage of complex data types, and allow for a more natural representation of real world entities such as sales orders or manufacture assemblies. UniVerse also features an embedded business language suitable for creating complete applications or for encapsulating complex business rules in client/server or internet based solutions, and in service orientated architecture (SOA). Because of these unique features, UniVerse databases are frequently found as embedded data sources behind mission-critical business, financial, engineering and government systems. If such a database is unavailable over the network, even for a brief while, or is not sized/configured right to handle the session load, or experiences frequent locks, it can adversely impact the uptime of and user access to the mission-critical services it supports. If such an undesirable outcome is to be avoided, the UniVerse database server needs to be continuously monitored. This is where eG Enterprise helps administrators.

## Chapter 2: How does eG Enterprise monitor the UniVerse Database Server?

eG Enterprise monitors the UniVerse Database Server in an agent based manner.

### 2.1 Managing the UniVerse Database Server

The eG Enterprise cannot automatically discover the UniVerse Database server so that you need to manually add the component for monitoring. Remember that the eG Enterprise automatically manages the components that are added manually. To add a UniVerse Database server component, do the following:

1. Log into the eG administrative interface.
2. Follow the Components -> Add/Modify menu sequence in the **Infrastructure** tile of the Admin menu.
3. In the **COMPONENT** page that appears next, select UniVerse Database as the **Component type**. Then, click the **Add New Component** button. This will invoke Figure 2.1.

The screenshot shows the 'COMPONENT' page with the following details:

- Category:** All
- Component type:** Universe Database
- Component information:**
  - Host IP/Name:** 192.168.10.1
  - Nick name:** UniDB
  - Port number:** 31438
- Monitoring approach:**
  - Agentless:**
  - Internal agent assignment:**
    - Auto:**
    - Manual:**
  - External agents:** 192.168.11.41, 192.168.8.135

Figure 2.1: Adding an UniVerse Database server

4. Specify the **Host IP** and the **Nick name** of the UniVerse Database server in Figure 2.1. The UniVerse Database server is monitored in an Agent-based manner. Then, click the **Add** button to register the changes.
5. When you attempt to sign out, a list of unconfigured tests will appear as shown in Figure 2.2.

List of unconfigured tests for 'UniVerse Database'		
Performance		UniDB:31438
UniVerse Database Active Group Locks	UniVerse Database Active Record Locks	UniVerse Database Sessions

Figure 2.2: List of Unconfigured tests to be configured for the UniVerse Database server

6. Click on any test in the list of unconfigured tests. For more details on configuring the tests, refer to [Monitoring the UniVerse Database Server](#) chapter.
7. Finally, signout of the eG administrative interface.

## Chapter 3: Monitoring the UniVerse Database Server

eG Enterprise provides a specialized monitoring model for the UniVerse Database server. Each layer of this model is mapped to tests that employ native operating system-level commands, network-level pings and UniVerse shell commands to periodically check on the availability of the database server, track the session load, and look for file locks in the database. Whenever an abnormality is detected – say, a session overload condition on the database, a sudden break in the availability of the server, or many and frequent file locks – the tests promptly notify the database administrators, so that they can instantly initiate remedial measures.

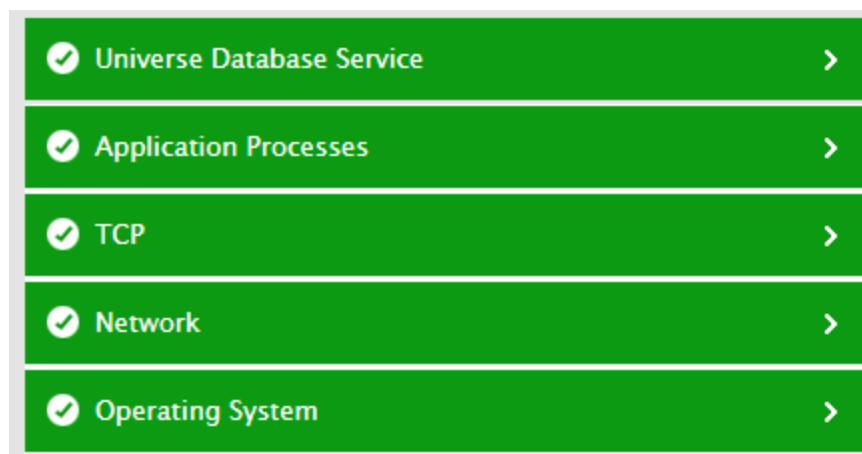


Figure 3.1: Layer model of the UniVerse Database server

The sections that follow will discuss the first layer of the layer model only, as all other layers have already been dealt with in the *Monitoring Unix and Windows Servers* document.

### 3.1 Universe Database Service Layer

Using the tests mapped to this layer, the session load on the server and the impact of the locking activity on the sessions can be ascertained.

#### 3.1.1 UniVerse Database Sessions Test

Administrators can limit the number of sessions that can be established on a UniVerse database server, so as not to choke the server. At frequent intervals, administrators should monitor the session count on the server and figure out if the maximum session limit is about to be reached or not. This will enable administrators to proactively detect potential overload conditions, and take pre-

emptive action against the same. This is exactly what the **UniVerse Database Sessions** test helps administrators achieve! At configured intervals, this test reports the session load and overall session usage by the users of the database server, and warns administrators of a probable overload condition on the server. Additionally, the test also reports the number and type of sessions launched per user, and thus reveals which user(s) has contributed the most to the overload and the type of sessions responsible for the same. The details of users and their sessions are also revealed as part of detailed diagnostics. Using these useful problem pointers, administrators can decide between killing idle sessions to reduce the load on the server or increasing the session limit to accommodate more number of sessions.

**Target of the Test:** A UniVerse database server

**Agent running the test:** An internal agent

**Output of the test:** One set of results for every user who is currently logged into the database server. Measures will also be reported for an additional All descriptor. The session load and usage metrics will be aggregated across all users and reported for this descriptor.

**Configurable parameters for the test**

Parameter	Description
Test period	How often should the test be executed.
Host	The host for which the test is to be configured.
Port	The port number at which the specified Host listens to. By default, this will be 31438.
Universe Shell Path	This test uses <b>UniVerse shell</b> commands to pull the desired metrics from the server. To enable the test to run these commands, provide the path to the bin folder of the UniVerse install directory. For example, for a Windows installation of UniVerse, the universe shell path can be: C:\U2\UV. For a Unix installation, your specification can be: /usr/uv.
Eclipse Path	U2 DBTools include Eclipse-based tools for programming and administration. Eclipse is an integrated development environment (IDE). It contains a base workspace and an extensible plug-in system for customizing the environment. Eclipse is written mostly in Java and its primary use is for developing Java applications. Where Eclipse IDE is installed, the eG agent should be configured to use the Eclipse environment for executing the <b>UV shell</b> commands. In this case therefore, type the full path to the Eclipse home directory. By default however, this parameter is set to <i>none</i> , indicating that by default, the eG agent runs the commands from the UniVerse shell only and not Eclipse.

Parameter	Description
Detailed Diagnosis	<p>To make diagnosis more efficient and accurate, the eG Enterprise suite embeds an optional detailed diagnostic capability. With this capability, the eG agents can be configured to run detailed, more elaborate tests as and when specific problems are detected. To enable the detailed diagnosis capability of this test for a particular server, choose the <b>On</b> option. To disable the capability, click on the <b>Off</b> option.</p> <p>The option to selectively enable/disable the detailed diagnosis capability will be available only if the following conditions are fulfilled:</p> <ul style="list-style-type: none"> <li>• The eG manager license should allow the detailed diagnosis capability</li> <li>• Both the normal and abnormal frequencies configured for the detailed diagnosis measures should not be 0.</li> </ul>

### Metrics reported by the test

Measurement	Description	Measurement Unit	Interpretation
Maximum session limit	Indicates the maximum number of sessions that can be launched on the target UniVerse database server.	Number	This measure will only be reported for the 'All' descriptor of this test.
Total sessions	Indicates the total number of sessions currently opened by this user. For the <b>All</b> descriptor, this measure will report the total number of open sessions on the target UniVerse database server, regardless of user.	Number	Using the value that this measure reports for the <b>All</b> descriptor, you can gauge how loaded the server is presently. You can then compare the value of this measure with the value of the <i>Maximum session limit</i> measure to know if the server is fast approaching its session limit or can accommodate many more sessions. If the former is true, it indicates a potential overload condition on the server. You can then compare the value of this measure across users to know which user is contributing the most to the overload.
Session usage	Indicates the percentage	Percent	A value close to 100% for the <b>All</b>

Measurement	Description	Measurement Unit	Interpretation
	of sessions utilized by this user. For the <b>All</b> descriptor, this measure will report what percentage of the maximum session limit is being used by all users logged into the server.		<p>descriptor reveals that too many sessions are currently open on the server, and may soon cause the server to consume its session limit. If that happens, then the server will deny access to new session requests. To avoid this, first check whether the server is sized with adequate resources to handle additional load, and if so, increase the session limit of the server.</p> <p>However, if the server does not have enough processing power, then you may want to kill the sessions that are idle or are engaged in inconsequential operations, so that the load on the server drops; this way, you can make room for newer sessions as well. To achieve this, first compare the value of this measure across users to know which user is contributing to the overload. Then, use the detailed diagnosis of the <b>Interactive sessions</b> and <b>Background processes</b> measures of that user to know which sessions of these users are unnecessarily consuming resources, and target such sessions for termination.</p>
Interactive sessions	Indicates the total number of interactive processes initiated by this user. For the <b>All</b> descriptor, this measure will report the sum total of interactive processes initiated by all users of the database server.	Number	<p>Interactive processes are those that are initiated by the user and run in the foreground.</p> <p>Background processes are those that are initiated by the user using the PHANTOM command. Phantom processes run in the background and are useful for long running or load spreading operations.</p>

Measurement	Description	Measurement Unit	Interpretation
		8	<p>If the value of the <i>Session usage</i> measure is close to 100% for the All descriptor, then compare the value of the Interactive sessions and Background sessions measure for that descriptor to know what type of sessions are causing the overload.</p> <p>If interactive sessions are contributing to the overload, then compare the value of the Interactive sessions measure across users to know which user has initiated the maximum number of interactive processes.</p> <p>Then, use the detailed diagnosis of the Interactive sessions measure of that user to view the PID of the interactive processes, the command that was last executed by each process, which terminal that user logged in from, and what time the user logged in. From this, you can identify the interactive sessions that have been open for too long a time running inconsequential commands, and mark them for termination.</p> <p>Likewise, if background sessions are contributing to the overload, then compare the value of the <i>Background sessions</i> measure across users to know which user has initiated the maximum number of background processes. Then, use the detailed diagnosis of the <i>Background sessions</i> measure of that user to view the PID of the background processes, the command that was last executed by each process, which terminal that user logged in from, and what time the user logged in. From this, you can identify the background sessions that have been open for too long a time running inconsequential commands, and mark them for termination.</p>

Measurement	Description	Measurement Unit	Interpretation
Background sessions	Indicates the number of background processes initiated by this user. For the <b>All</b> descriptor, this measure will report the sum total of all background processes initiated by all users of the database server.	Number	

### 3.1.2 UniVerse Database Active Group Locks Test

UniVerse stores its data in containers known as Files. Static and Dynamic files are the most common files in a UniVerse database. Both static and dynamic files consist of a number of separate storage sections, known as buffers. The size and number of these buffers is specified when the file is created, and space is reserved for these on disk. This is known as the 'primary space' of the file. As records are added to the file, UniVerse distributes the records across this primary space using a scattering formula based on the record keys. This formula produces the address of the buffer in which the record should be placed. If a buffer in a file becomes full, and another record is added to the file that is addressed to the same buffer, the file is said to be 'overflowed'. It cannot use a different buffer to hold the record, since this would break the allocation scheme. Instead it will extend the file by chaining an additional buffer to the end of the first buffer – and so on, so that more records are added to the file. The chain of buffers attached to a specific buffer in the primary space, is known as a 'group'.

When a process needs to read or write a record to or from a file, UniVerse first works out which group should hold the record to be written or holds the record to be read in the primary space by applying the relevant hashing algorithm to the record key. Because the group structure can hold more than one record, UniVerse needs to ensure that only one process at a time can read from, or update an individual group. This prevents one process trying to scan through a group whilst another process is busy reorganizing it. So it then proceeds to place a lock entry for that group into the lock table. Because the lock specifies both the file and the group within the file, this does not prevent another UniVerse process from accessing a different group in the same file at the same time. So different processes can still read and write a single file safely.

If a file is well sized and records are distributed across the primary space, it should be very rare that two processes will need access to the same part of the file at the same time, and so there will be few

collisions within the group lock table. If a file is badly sized and records are consigned to long overflow chains of buffers belonging to the same group, the chances of more than one process needing access to the same group are much higher – and so the collisions are much higher. And the longer the chains, the longer the time that each lock needs to be held. All of which means that more processes will spend longer queuing up and waiting for the lock to become available.

This is why, if a processing slowdown is noticed in a UniVerse database, administrators should first check whether too many group locks are currently active in the database, and identify the mode of these locks. This is where the **UniVerse Database Active Group Locks** test helps. For each lock mode, this test reveals the number of active group locks in that mode. The detailed diagnostics provided by this test provide deep insights into these locks, and in the process, enables administrators to figure out:

- Which processes are holding what type of lock?
- Which process is holding a lock on which group of which file?

With the help of these details, administrators can identify processes that are unnecessarily holding a lock, and can unlock the files and groups so locked, so as to ease processing.

**Target of the Test:** A UniVerse database server

**Agent running the test:** An internal agent

**Output of the test:** One set of results for every group lock mode currently active in the target database. The table below discusses the probable locking modes and what they represent:

Descriptor	Description
EX	Exclusive update lock
SH	Shared lock
RD	Read lock
WR	Write lock
IN	Information lock

### Configurable parameters for the test

Parameter	Description
Test period	How often should the test be executed.
Host	The host for which the test is to be configured.
Port	The port number at which the specified Host listens to. By default, this will be 31438.

Parameter	Description
Universe Shell Path	<p>This test uses <b>UniVerse shell</b> commands to pull the desired metrics from the server. To enable the test to run these commands, provide the path to the bin folder of the UniVerse install directory. For example, for a Windows installation of UniVerse, the universe shell path can be: C:\U2\UV. For a Unix installation, your specification can be: /usr/uv.</p>
Eclipse Path	<p>U2 DBTools include Eclipse-based tools for programming and administration. Eclipse is an integrated development environment (IDE). It contains a base workspace and an extensible plug-in system for customizing the environment. Eclipse is written mostly in Java and its primary use is for developing Java applications. Where Eclipse IDE is installed, the eG agent should be configured to use the Eclipse environment for executing the <b>UV shell</b> commands. In this case therefore, type the full path to the Eclipse home directory. By default however, this parameter is set to <i>none</i>, indicating that by default, the eG agent runs the commands from the UniVerse shell only and not Eclipse.</p>
Detailed Diagnosis	<p>To make diagnosis more efficient and accurate, the eG Enterprise suite embeds an optional detailed diagnostic capability. With this capability, the eG agents can be configured to run detailed, more elaborate tests as and when specific problems are detected. To enable the detailed diagnosis capability of this test for a particular server, choose the <b>On</b> option. To disable the capability, click on the <b>Off</b> option.</p> <p>The option to selectively enable/disable the detailed diagnosis capability will be available only if the following conditions are fulfilled:</p> <ul style="list-style-type: none"> <li>• The eG manager license should allow the detailed diagnosis capability</li> <li>• Both the normal and abnormal frequencies configured for the detailed diagnosis measures should not be 0.</li> </ul>

### Metrics reported by the test

Measurement	Description	Measurement Unit	Interpretation
Active group locks	Indicates the number of active group locks in this mode.	Number	<p>Compare the value of this measure across modes to identify the mode which most of the group locks are in.</p> <p>If the database server has been frequently experiencing processing bottlenecks, you can use the detailed</p>

Measurement	Description	Measurement Unit	Interpretation
			diagnosis of this measure to identify the processes that are holding the locks in that mode, the users who initiated the processes, the files and groups that are locked, the file system in which the files exist, and the host from which the lock originated. With the help of this information, administrators can instantly isolate the processes that are holding the locks unnecessarily and the users who are running those processes. Such processes can later be killed or the lock they hold released to clear the processing bottleneck.

### 3.1.3 UniVerse Database Active Record Locks Test

UniVerse record and file locks control access to records and files among concurrent user processes. To control access to records and files, UniVerse supports two levels of lock granularity:

- Fine granularity of record locks
- Coarse granularity of file locks

Granularity refers to the level at which a process or program acquires a lock. Record locks affect a smaller element, the record, and provide a fine level of granularity, whereas file locks affect a larger element, the file, and produce a coarse level of granularity. Lock compatibility determines what a user's process can access while other processes have locks on records or files. Record locks allow more compatibility because they coexist with other record locks, thus allowing more transactions to take place concurrently. However these "finer-grained" locks provide a lower isolation level. File locks enforce a high isolation level, more concurrency control, but less compatibility. Lock compatibility decreases and isolation level increases as strength and granularity increase. This may increase the possibility of deadlocks at high isolation levels. Within each granularity level, the strength of the lock can vary. UniVerse supports the following locks (in order of increasing strength):

- Shared record lock
- Update record lock

- Shared file lock
- Intent file lock
- Exclusive file lock

The locks become less compatible as the granularity, strength, and number of locks increase. Therefore the number of lock conflicts increase, and fewer users can access records and files concurrently. Weaker locks can always be promoted to stronger locks or escalated to a coarser level of granularity if needed.

Whenever users complaints regarding data inaccessibility increase, it is good practice for administrators to check if too many file/record locks are being held, and if so, what their strength is. **The UniVerse Database Active Record Locks** test provides administrators with this information, instantly! This test automatically discovers the types of locks currently active in the target UniVerse database and reports the count of locks held per type. From the lock types, administrators can quickly infer the strength of the locks. If too many strong locks are active on the database, then the detailed diagnostics provided by this test can be used to identify the processes holding the locks, the users who own the processes, and the file and records locked. This way, administrators can precisely isolate those processes that are unnecessarily holding the locks and can initiate measures to have those locks released.

**Target of the Test:** A UniVerse database server

**Agent running the test:** An internal agent

**Output of the test:** One set of results for every group lock mode currently active in the target database. The table below discusses the probable locking modes and what they represent:

Descriptor	Description
RU	Update record lock
RL	Shared record lock
FS	Shared file lock
IX	Shared file lock with intent to acquire an exclusive file lock
FX	Exclusive file lock
XU	Exclusive lock set by CLEAR.FILE
CR	Shared file lock set by RESIZE
XR	Exclusive file lock set by RESIZE

## Configurable parameters for the test

Parameter	Description
Test period	How often should the test be executed.
Host	The host for which the test is to be configured.
Port	The port number at which the specified Host listens to. By default, this will be 31438.
UniVerse Shell Path	This test uses <b>UniVerse shell</b> commands to pull the desired metrics from the server. To enable the test to run these commands, provide the path to the bin folder of the UniVerse install directory. For example, for a Windows installation of UniVerse, the universe shell path can be: C:\U2\UV. For a Unix installation, your specification can be: /usr/uv.
Eclipse Path	U2 DBTools include Eclipse-based tools for programming and administration. Eclipse is an integrated development environment (IDE). It contains a base workspace and an extensible plug-in system for customizing the environment. Eclipse is written mostly in Java and its primary use is for developing Java applications. Where Eclipse IDE is installed, the eG agent should be configured to use the Eclipse environment for executing the <b>UV shell</b> commands. In this case therefore, type the full path to the Eclipse home directory. By default however, this parameter is set to <i>none</i> , indicating that by default, the eG agent runs the commands from the UniVerse shell only and not Eclipse.
Detailed Diagnosis	To make diagnosis more efficient and accurate, the eG Enterprise suite embeds an optional detailed diagnostic capability. With this capability, the eG agents can be configured to run detailed, more elaborate tests as and when specific problems are detected. To enable the detailed diagnosis capability of this test for a particular server, choose the <b>On</b> option. To disable the capability, click on the <b>Off</b> option.  The option to selectively enable/disable the detailed diagnosis capability will be available only if the following conditions are fulfilled: <ul style="list-style-type: none"> <li>• The eG manager license should allow the detailed diagnosis capability</li> <li>• Both the normal and abnormal frequencies configured for the detailed diagnosis measures should not be 0.</li> </ul>

## Metrics reported by the test

Measurement	Description	Measurement Unit	Interpretation
Active record locks	Indicates the number of	Number	Compare the value of this measure

Measurement	Description	Measurement Unit	Interpretation
	active file/record locks of this type.		<p>across types to determine the strength of the majority of locks currently held.</p> <p>If too many strong locks are held, you can use the detailed diagnosis of this measure to identify the processes that are holding the strong locks, the users who initiated the processes, the files and records that are locked, the file system in which the files exist, and the host from which the lock originated.</p> <p>With the help of this information, administrators can instantly isolate the processes that are holding the locks unnecessarily and the users who are running those processes. Such processes can later be killed or the lock they hold released to clear processing bottlenecks (if any).</p>

The table below discusses how each type of locks impact user access:

Lock type (strength)	Allows other users to acquire	Prevents other users from acquiring	Is ignored if the current user already owns
Shared file lock	<ul style="list-style-type: none"> <li>Shared record lock</li> <li>Shared file lock</li> <li>Intent file lock</li> </ul>	<ul style="list-style-type: none"> <li>Update record lock</li> <li>Exclusive file lock</li> </ul>	<ul style="list-style-type: none"> <li>Shared record lock</li> <li>Update record lock</li> <li>Shared file lock</li> <li>Intent file lock</li> <li>Exclusive file lock</li> </ul>
Update record lock	No locks	<ul style="list-style-type: none"> <li>Shared record lock</li> <li>Update record lock</li> <li>Shared file lock</li> <li>Intent file lock</li> <li>Exclusive file lock</li> </ul>	<ul style="list-style-type: none"> <li>Update record lock</li> <li>Exclusive file lock</li> </ul>

Lock type (strength)	Allows other users to acquire	Prevents other users from acquiring	Is ignored if the current user already owns
Shared file lock	<ul style="list-style-type: none"> <li>• Shared record lock</li> <li>• Shared file lock</li> </ul>	<ul style="list-style-type: none"> <li>• Update record lock</li> <li>• Intent file lock</li> <li>• Exclusive file lock</li> </ul>	<ul style="list-style-type: none"> <li>• Shared file lock</li> <li>• Intent file lock</li> <li>• Exclusive file lock</li> </ul>
Intent file lock	Shared record lock	<ul style="list-style-type: none"> <li>• Update record lock</li> <li>• Shared file lock</li> <li>• Intent file lock</li> <li>• Exclusive file lock</li> </ul>	<ul style="list-style-type: none"> <li>• Intent file lock</li> <li>• Exclusive file lock</li> </ul>
Exclusive file lock	No locks	<ul style="list-style-type: none"> <li>• Exclusive file lock No locks</li> <li>• Shared record lock</li> <li>• Update record lock</li> <li>• Shared file lock</li> <li>• Intent file lock</li> <li>• Exclusive file lock</li> </ul>	<ul style="list-style-type: none"> <li>• Exclusive file lock</li> </ul>

## About eG Innovations

eG Innovations provides intelligent performance management solutions that automate and dramatically accelerate the discovery, diagnosis, and resolution of IT performance issues in on-premises, cloud and hybrid environments. Where traditional monitoring tools often fail to provide insight into the performance drivers of business services and user experience, eG Innovations provides total performance visibility across every layer and every tier of the IT infrastructure that supports the business service chain. From desktops to applications, from servers to network and storage, from virtualization to cloud, eG Innovations helps companies proactively discover, instantly diagnose, and rapidly resolve even the most challenging performance and user experience issues.

eG Innovations is dedicated to helping businesses across the globe transform IT service delivery into a competitive advantage and a center for productivity, growth and profit. Many of the world's largest businesses use eG Enterprise to enhance IT service performance, increase operational efficiency, ensure IT effectiveness and deliver on the ROI promise of transformational IT investments across physical, virtual and cloud environments.

To learn more visit [www.eginnovations.com](http://www.eginnovations.com).

### Contact Us

For support queries, email [support@eginnovations.com](mailto:support@eginnovations.com).

To contact eG Innovations sales team, email [sales@eginnovations.com](mailto:sales@eginnovations.com).

Copyright © 2018 eG Innovations Inc. All rights reserved.

This document may not be reproduced by any means nor modified, decompiled, disassembled, published or distributed, in whole or in part, or translated to any electronic medium or other means without the prior written consent of eG Innovations. eG Innovations makes no warranty of any kind with regard to the software and documentation, including, but not limited to, the implied warranties of merchantability and fitness for a particular purpose. The information contained in this document is subject to change without notice.

All right, title, and interest in and to the software and documentation are and shall remain the exclusive property of eG Innovations. All trademarks, marked and not marked, are the property of their respective owners. Specifications subject to change without notice.