



Monitoring Sybase ASE Server

eG Innovations Product Documentation

Table of Contents

CHAPTER 1: INTRODUCTION	1
CHAPTER 2: HOW TO CONFIGURE AND MONITOR SYBASE ASE (BELOW V15) SERVER USING EG ENTERPRISE?	3
2.1 Configuring a Sybase ASE (Below v15) Server Using the Monitor Client Library	3
2.1.1 Configuring a Sybase ASE (Below v15) server on Unix	3
2.1.2 Configuring a Sybase ASE (Below v15) Server on Windows	6
2.2 Managing the Sybase ASE (Below v15) Server	6
CHAPTER 3: MONITORING SYBASE ASE (BELOW V15) SERVER USING THE MONITOR CLIENT LIBRARY	9
3.1 The Syb Network Layer	10
3.1.1 Sybase Network Test	10
3.2 The Syb Memory Structures Layer	12
3.2.1 Sybase Locks Test	12
3.2.2 Sybase Lock Stats Test	15
3.2.3 Sybase Cache Test	16
3.2.4 Sybase Proc Cache Test	19
3.3 The Syb Devices Layer	20
3.3.1 Sybase Devices Test	21
3.4 The Syb Databases Layer	22
3.4.1 Sybase Database Space Usage Test	22
3.4.2 The Syb Service Layer	24
3.4.3 Sybase System Processes Test	24
3.4.4 Sybase Responses Test	26
3.4.5 Sybase System Processes Test	29
3.4.6 Sybase Tasks Test	31
3.4.7 Sybase Transaction Log Test	32
3.4.8 Sybase Transactions Test	35
3.4.9 Sybase Blockers Test	36
3.4.10 Sybase Applications Test	38
CHAPTER 4: HOW TO CONFIGURE AND MONITOR SYBASE ASE SERVER USING EG ENTERPRISE?	41
4.1 Configuring a Sybase ASE Server Using the MDA Tables	41
4.1.1 Configuring the eG Agent to Monitor the Sybase ASE Server Using the MDA Tables	41
4.2 Managing the Sybase ASE 15 Server	42
CHAPTER 5: MONITORING THE SYBASE ASE SERVER USING THE MDA TABLES	44
5.1 Sybase Application Processes Layer	45
5.1.1 Sybase Errors Test	46

5.2 Sybase Memory Structures Layer	51
5.2.1 Sybase Process Waits Test	52
5.2.2 Sybase Deadlocks Test	54
5.2.3 Sybase Lock Waits Test	55
5.2.4 Sybase Spinlocks Test	59
5.3 Sybase Cache Layer	61
5.3.1 Sybase Data Cache Test	61
5.3.2 Sybase Procedure Cache Test	63
5.4 Sybase Server Layer	65
5.4.1 Sybase Device I/O Test	66
5.4.2 Sybase Engine Test	68
5.4.3 Sybase Network I/O Test	70
5.4.4 Sybase System Processes Test	72
5.5 Sybase Databases Layer	77
5.5.1 Sybase DatabaseStats Test	78
5.5.2 Sybase Database Space Usage Test	80
5.6 Sybase Service Layer	82
5.6.1 Sybase Long Running Queries Test	83
5.6.2 Sybase Users Test	85
5.6.3 Sybase Responses Test	87
ABOUT EG INNOVATIONS	90

Table of Figures

Figure 1.1: Architecture of ASE	1
Figure 1.2: Architecture of the Monitor server	2
Figure 2.1: Configuring the Sybase ASE (Below v15) server	6
Figure 2.2: Viewing the list of unmanaged Sybase ASE (Below v15) server	7
Figure 2.3: Managing a Sybase ASE (Below v15) server	8
Figure 2.4: A table displaying the list of unconfigured tests for the Sybase ASE (Below v15) server	8
Figure 3.1: Layer model for Sybase ASE (Below v15) server	9
Figure 3.2: Tests mapping to the Syb Network layer	10
Figure 3.3: Tests mapping to the Syb Memory Structures layer	12
Figure 3.4: Tests mapping to the Syb Devices layer	20
Figure 3.5: The tests associated with the Syb Databases layer	22
Figure 3.6: Tests mapping to the Syb Service layer	24
Figure 4.1: Adding Sybase ASE server	43
Figure 4.2: A table displaying the List of Unconfigured Tests for the Sybase ASE server	43
Figure 5.1: The Sybase ASE monitoring model	44
Figure 5.2: The tests mapped to the Sybase Application Processes layer	46
Figure 5.3: The tests associated with the Sybase Memory Structures layer	52
Figure 5.4: The detailed diagnosis of the Number of waits measure	54
Figure 5.5: The detailed diagnosis of the Number of locks measure	59
Figure 5.6: The tests associated with the Sybase Cache layer	61
Figure 5.7: The detailed diagnosis of the Data cache hit ratio	63
Figure 5.8: The tests mapped to the Sybase Server layer	66
Figure 5.9: Detailed diagnosis of the Blocked processes reported by the SybaseSysProcesses test	74
Figure 5.10: Analyzing blocked processes	75
Figure 5.11: Details of the blocking process	76
Figure 5.12: The detailed diagnosis of the Running processes measure reported by the SybaseSysProcesses test	76
Figure 5.13: The detailed diagnosis of the Sleeping processes measure reported by the SybaseSysProcesses test	77
Figure 5.14: The detailed diagnosis of the Remote processes measure reported by the SybaseSysProcesses test	77
Figure 5.15: The tests mapped to the Sybase Databases layer	78
Figure 5.16: The tests mapped to the Sybase Service Layer	83
Figure 5.17: The detailed diagnosis of the Running processes measure reported by the Sybase Users test	86
Figure 5.18: The detailed diagnosis of the Sleeping processes measure reported by the Sybase Users test	87

Chapter 1: Introduction

Adaptive Server Enterprise (ASE) is a performance-optimized relational database management system that is ideally suited for online transaction processing (OLTP) and decision support systems (DSS).

Figure 1.1 depicts the components of a typical ASE.

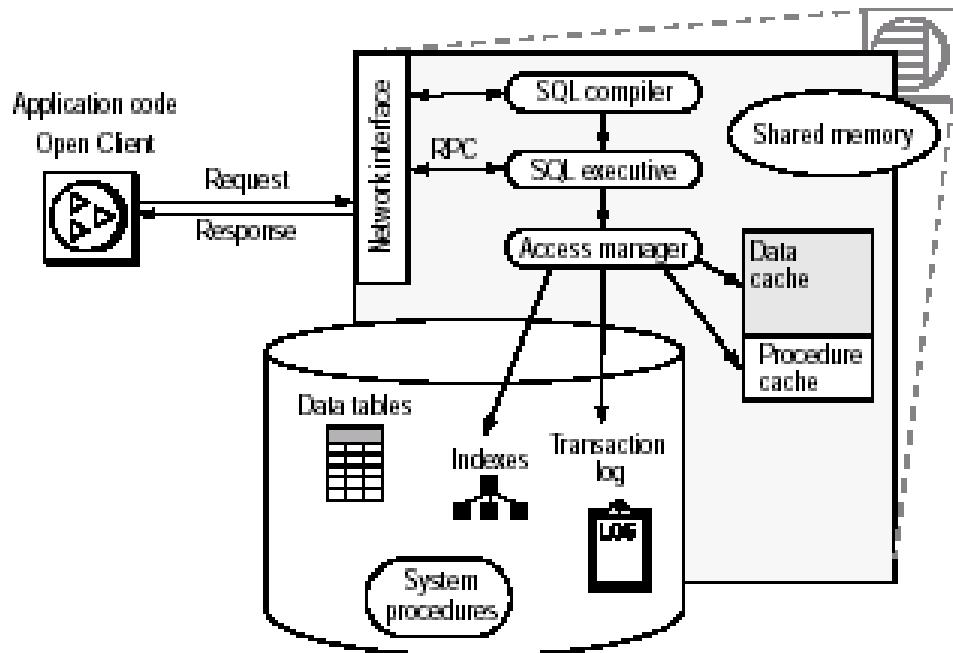


Figure 1.1: Architecture of ASE

The components include Data Tables, Transaction log, System procedures, SQL compiler, SQL Executive, Access manager, Shared Memory, Data Caches, Network Interface etc. A monitor server also comes along with an ASE. The architecture of the monitor server is shown in Figure 1.2. As the communication between the adaptive server and monitor server happens through a shared memory, the monitor server has to reside on the same machine as the adaptive server. The monitor server communicates with the adaptive server and keeps track of all performance monitoring data. It also maintains all the counters.

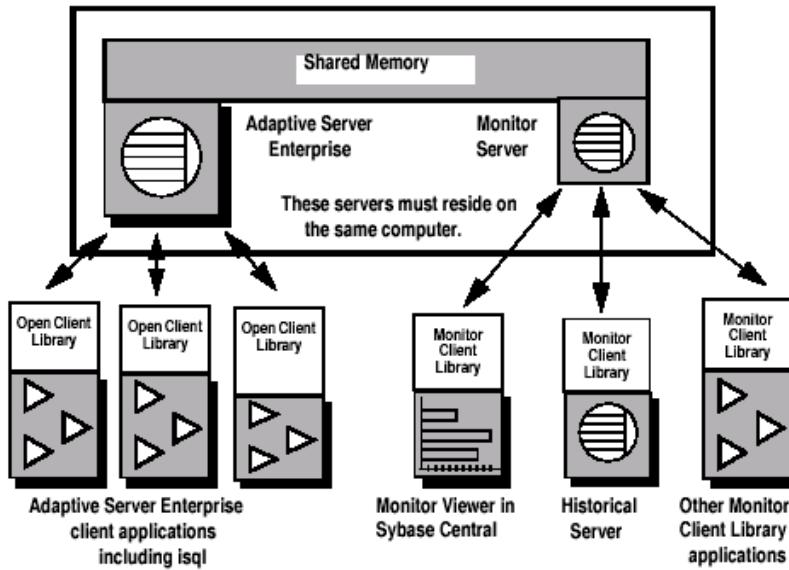


Figure 1.2: Architecture of the Monitor server

Starting in ASE 12.5.0.3, a new feature called 'MDA tables' is available to ASE users. These MDA tables provide access to low-level monitoring information in ASE; since the MDA tables can be accessed with regular SQL select statements, they are much easier to use than products like Monitor Server/Historical Server.

eG Enterprise supports two distinct approaches to monitoring the Sybase ASE - while one approach involves the usage of the Monitor Client Library (see Figure 1.2) for obtaining the metrics of interest, the other mandates the use of the MDA tables installed on the Sybase ASE.

The sections that follow will discuss each of these models in great detail.

Chapter 2: How to Configure and Monitor Sybase ASE (Below v15) Server Using eG Enterprise?

eG Enterprise can monitor the Sybase ASE (Below v15) server in an agent-based or an agentless manner. In case of the agentless approach, the remote agent used to monitor the Sybase ASE (Below v15) server should be deployed on a remote Windows host in the environment.

The broad steps for configuring and monitoring Sybase ASE (Below v15) server using eG Enterprise are as follows:

- Configure a Sybase ASE (Below v15) Server Using the Monitor Client Library. For the detailed discussion on this, refer to Section **2.1**.
- Manage the Sybase ASE (Below v15) server and configure the tests pertaining to server to start monitoring the target server. See Section **2.2**.

2.1 Configuring a Sybase ASE (Below v15) Server Using the Monitor Client Library

In order to extract performance data from a Sybase ASE (Below v15) server using the Monitor Client Library, eG Enterprise provides the Sybase monitoring model. This section discusses how to use the Sybase monitoring model.

2.1.1 Configuring a Sybase ASE (Below v15) server on Unix

To configure the Sybase ASE (Below v15) server for monitoring by an eG agent, you can use either the **setup_agent** command or the **setup_sybase.sh** command. Both these commands are available in the **/opt/egurkha/bin** directory.

The **setup_agent** command is primarily used to configure the eG agent. The Sybase ASE (Below v15) server configuration is a part of this process.

To configure the Sybase ASE (Below v15) server after configuring the agent, do the following:

1. At the command prompt, move to the **/opt/egurkha/bin** directory and run the **setup_sybase.sh** command.
2. Upon execution, the command will request for the following inputs:

- The IP address of the host on which the Sybase ASE (Below v15) server has been installed
- The port at which the Sybase server listens
- The password of the Sybase administrative user (who holds the “sa_role” privilege).

```
Please enter the details of the Sybase Adaptive server which is running on this machine.
```

```
IP address: 192.168.10.88
```

```
Port number: 4100
```

```
Password for sa login:
```

3. By default, the eG Sybase Monitor extracts the measures of interest by executing stored procedures on the 'master' database on the Sybase server. If, for some reason, you decide not to use the 'master' database, then you can create a special database for this purpose using this setup procedure. To achieve this, first, type **y** when setup prompts you for your confirmation to create a new database.

```
Do you want to create a new database to store eG System Procedures and Tables? [y/n]:  
y
```

4. If you press **y** at step 2, you will be prompted for the new database name:

```
Please enter the new Database name: john
```

After you specify the name of the new database, setup will lead you step 4 where the special database user is to be created.

On the other hand, if you press **n** at step 2 above, it means that you will be using the default 'master' database. In which case again, you will be lead to step 4 where a new database user is to be created.

5. eG Enterprise requires a special Sybase database user account for monitoring a Sybase server. This user should possess the “sa_role” privilege and the “sybase_ts_role” privilege. Setup will now request your confirmation for creating this user account.

```
To monitor a Sybase Adaptive server, the eG Agent requires a user account with the sa_role and sybase_ts_role privilege.
```

```
Do you want me to create a user with sa_role and sa_ts_role privilege in the database?  
[y/n]:y
```

Enter **y** to proceed with the new user creation, or **n** if you do not wish to create a new database user.

6. If you enter **y** in step 2, you will be required to provide the following inputs:

```
User: john
```

```
Password: ****
```

```
Retype Password: ****
```

Specify the name of the new user and his/her password in the space provided. Also, confirm the password by retying it.

7. Once user creation is successful, the following message will appear:

```
The user has been created successfully in the database.
```

```
Please use this user name and password to configure the Sybase related tests using the eG Admin UI.
```

8. The **/opt/egurkha/lib** directory (in Windows, this will be **<EG_INSTALL_DIR>/lib** directory) in an agent host, consists of a file named **sybmon.sql**. This file comprises of 3 stored procedures, namely: **sp_egmonitor**, **sp_eglockdetails**, **sp_egmonitor_dd**. When these procedures are executed on the Sybase server, they enable the Sybase-specific tests to collect the required measures from the server.

Towards this end, the setup will now perform the following tasks:

- Pick the three procedures from the **/opt/egurkha/lib** directory
- Log into the Sybase server using the sa login password provided earlier
- Install the procedures on the Sybase server

The following messages indicate the installation attempts:

```
Installing the procedure sp_egmonitor. . .
```

```
Granting permissions. .
```

```
Installing the procedure sp_eglockdetails. . .
```

```
Granting permissions. .
```

```
Installing the procedure sp_egmonitor_dd...
```

```
Granting permissions. .
```

9. Once all the three procedures are successfully installed, setup will display the following message:

Installation has succeeded

10. Subsequently, when the Sybase related tests are configured (using the special user's name and password) and executed, the tests in turn, will run the installed procedures on the Sybase server, and collect the necessary statistics.

2.1.2 Configuring a Sybase ASE (Below v15) Server on Windows

In Windows environments, eG provides a special Sybase configuration tool. To execute the tool, follow the menu sequence depicted by Figure 2.1.

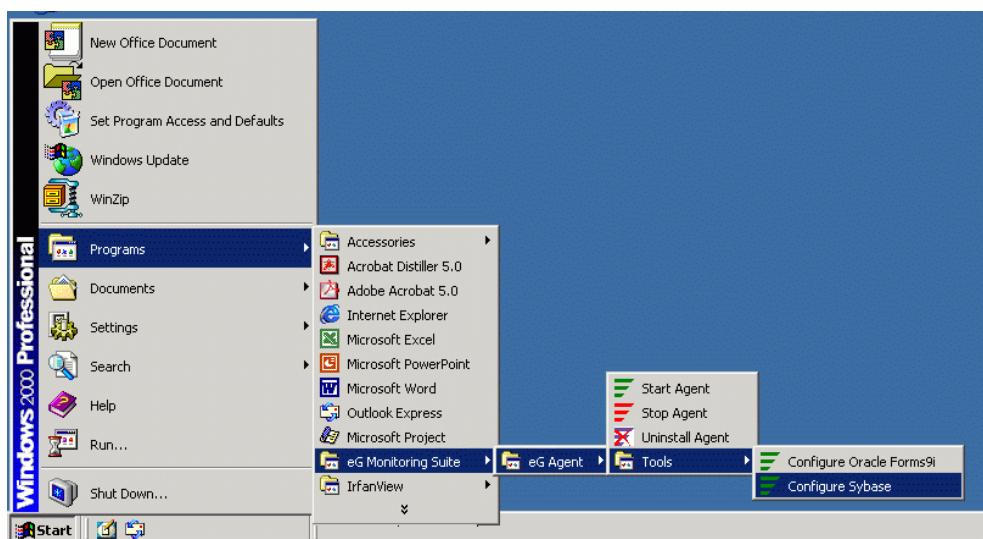


Figure 2.1: Configuring the Sybase ASE (Below v15) server

Once the configuration process begins, follow steps 2-9 of Section 2.1.1.

2.2 Managing the Sybase ASE (Below v15) Server

eG Enterprise is capable of automatically discovering the Sybase ASE (Below v15) servers in the environment. The discovered servers can be managed using eG administrative interface. To achieve this, do the followings:

1. Check whether the Sybase ASE (Below v15) server has been auto-discovered. If not, run discovery using the **DISCOVERY** page (Infrastructure -> Components -> Discover) or manually add the Sybase server using the **ADD/MODIFY COMPONENTS** page (Infrastructure -> Components -> Add/Modify). eG Enterprise automatically manages the manually added components.

2. If the Sybase server has been discovered, follow the *Components -> Manage/Unmanage* menu sequence in the **Infrastructure** tile of the **Admin** menu to manage it.
3. When Figure 2.2 appears, select **Sybase** as the **Component type**. All Sybase ASE (Below v15) servers that were recently discovered will be displayed in the **Unmanaged Components** list.

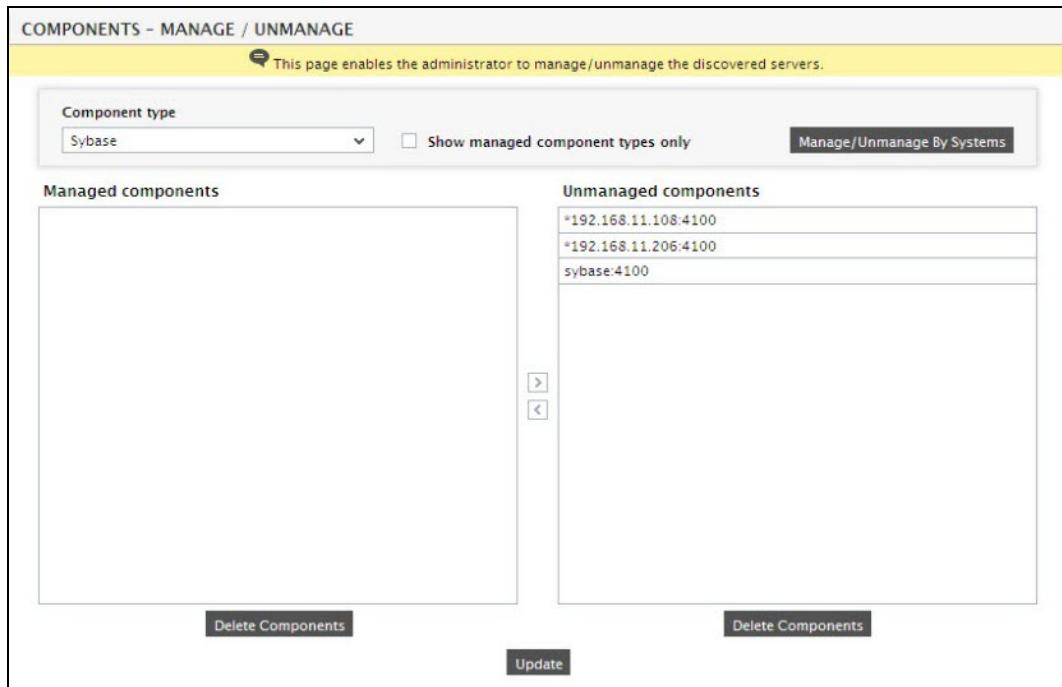


Figure 2.2: Viewing the list of unmanaged Sybase ASE (Below v15) server

4. Select the server you want to manage from the **Unmanaged Components** list and click the < button to manage it. This will transfer your selection to the **Managed Components** list (see Figure 2.3).

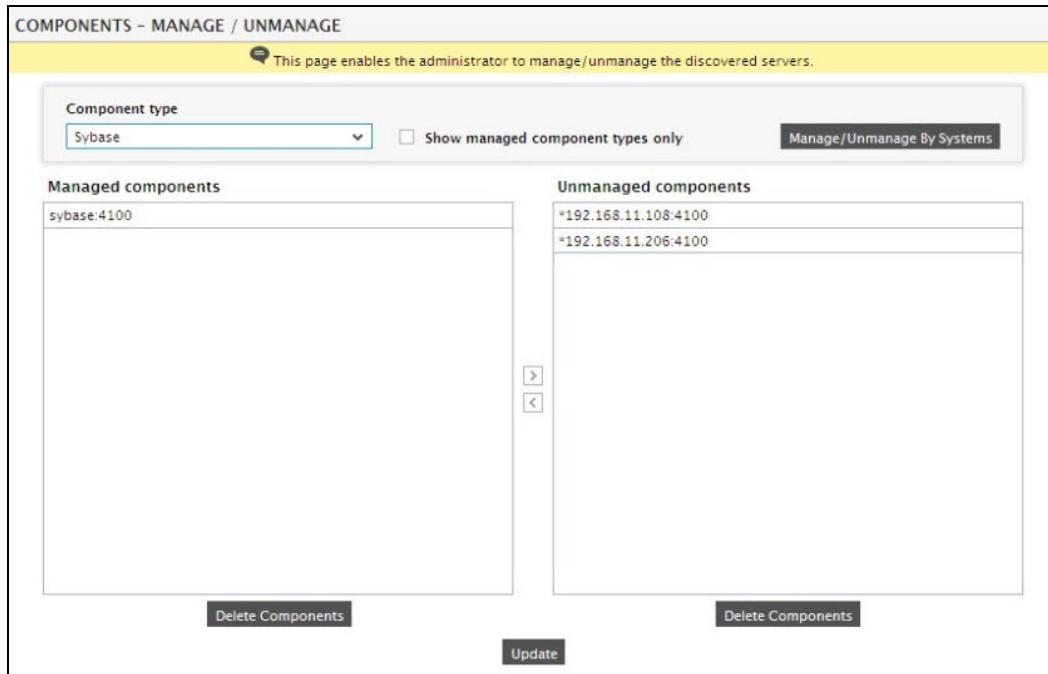


Figure 2.3: Managing a Sybase ASE (Below v15) server

- Finally, click the **Update** button in to save the changes.
- Now, if you try to sign out of the user interface, you will be prompted to configure a series of tests for the managed Sybase server (see Figure 2.4).

List of unconfigured tests for 'Sybase'		
Performance		sybase:4100
Processes	Sybase Applications	Sybase Blockers
Sybase Cache	Sybase Database Space Usage	Sybase Devices
Sybase Lock Stats	Sybase Locks	Sybase Network
Sybase Proc Cache	Sybase Responses	Sybase System Processes
Sybase Tasks	Sybase Transaction Log	Sybase Transactions

Figure 2.4: A table displaying the list of unconfigured tests for the Sybase ASE (Below v15) server

- Click on the tests to configure. To know the details on the configurable parameters of the tests and the metrics that the tests report, refer to [Monitoring Sybase ASE \(Below v15\) Server Using the Monitor Client Library](#) chapter.
- Finally, sign out of the eG administrative interface.

Chapter 3: Monitoring Sybase ASE (Below v15) Server Using the Monitor Client Library

In order to extract performance data from a Sybase ASE (Below v15) server using the Monitor Client Library, eG Enterprise provides the Sybase ASE (Below v15) monitoring model (see Figure 3.1).

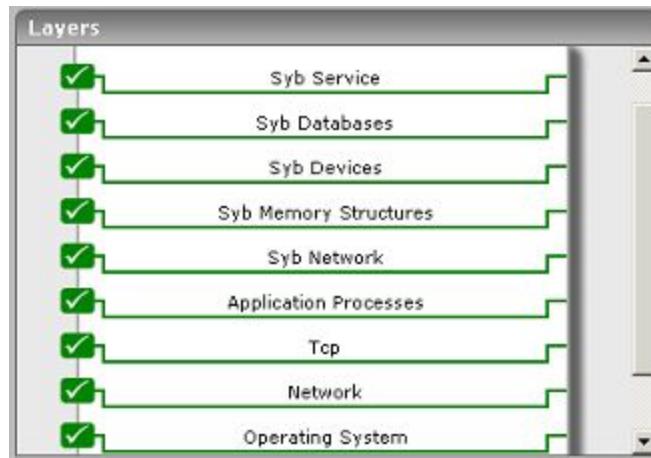


Figure 3.1: Layer model for Sybase ASE (Below v15) server

Every layer of Figure 3.1 is associated with a series of tests, which when executed on the Sybase ASE (Below v15) server, extract a wealth of performance metrics from the server. These statistics in turn enable administrators to quickly figure out the following:

- Is the Sybase server available? If so, does it respond to requests quickly?
- Is the Sybase ASE (Below v15) server overloaded?
- Is the I/O activity on the server optimal?
- How many locks are currently active on the database? Have the locks been held for an unusually long time? Do applications have to wait for too long to acquire a lock?
- Are there too many deadlocks on the database?
- Are the Sybase data and procedure caches been effectively utilized?
- Is sufficient space available for all Sybase databases? Should more space be allocated to any specific database?
- Are transactions rolled back frequently?

- Are there too many root blocker processes on the database?
- Which is the busiest program/application executing on the Sybase database in terms of number of open connections to it? Is any application consuming the CPU resources excessively?

The sections to come discuss each of the top 5 layers of Figure 3.1 elaborately, as the remaining layers have been dealt with in the *Monitoring Unix and Windows Servers* document.

3.1 The Syb Network Layer

This layer tracks the health of the network(s) that connect users to the adaptive server. Figure 3.2 depicts the tests mapping to this layer.



Figure 3.2: Tests mapping to the Syb Network layer

3.1.1 Sybase Network Test

This test, executed by an internal agent, tracks various statistics pertaining to network traffic of the Sybase Adaptive Server.

Target of the test : A Sybase ASE (Below v15) server

Agent deploying the test : An internal agent

Outputs of the test : One set of results for every Sybase ASE (Below v15) server being monitored.

Configurable parameters for the test

Parameter	Description
Test Period	How often should the test be executed.
Host	Refers to the IP address of the Sybase server.

Parameter	Description
Port	The port number at which the Sybase server listens to.
User	A Sybase user who has the “sa_role”.
Password	The password corresponding to the above user.
Confirm Password	Confirm the password by retying it here.

Measurements made by the test

Measurement	Description	Measurement Unit	Interpretation
I/O requests	The total number of packets received and sent per second	Pkts/Sec	
I/O delays	The percentage of times network I/O was delayed	Percent	A non-zero value over a period of time indicates a problem.
Receive rate	Reports the rate at which the network bytes are being received.	KBytes/Sec	This measure indicates the amount of data coming to the database server through the network. A high value of this measure indicates higher rate of incoming data to the server. If this measure is considerably high, the value of the default network packet size parameter should be increased.
Send rate	Reports the rate at which the network bytes are being sent.	KBytes/Sec	This measure indicates the amount of data going out of the database server through the network. A high value of this measure indicates higher rate of outgoing data from the server. If this measure is considerably high, the value of the default network packet size parameter should be increased.
Avg packet size	The average number of bytes sent per packet	Bytes	If the Adaptive server receives a command that is larger than the packet size, the server waits to begin processing until it receives the full command. Therefore, commands that require more than one packet are

Measurement	Description	Measurement Unit	Interpretation
			slower to execute and take up more I/O resources. If the average bytes per packet is near the default packet size configured for your server, you may want to configure larger packet sizes for some connections. You can configure the network packet size for all connections or allow certain connections to log in using larger packet sizes.

3.2 The Syb Memory Structures Layer

This layer tracks the status of the locks, deadlocks, and database caches. The tests associated with this layer are depicted in Figure 3.3.

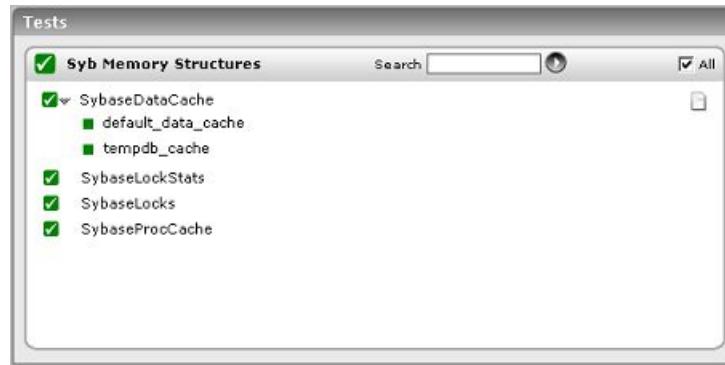


Figure 3.3: Tests mapping to the Syb Memory Structures layer

3.2.1 Sybase Locks Test

This test, executed by an internal agent, tracks the statistics pertaining to the lock and deadlock traffic of Sybase Adaptive Server. Locking affects the performance of the Sybase adaptive server by limiting the concurrency. An increase in the number of simultaneous users to a server may increase the lock contention thereby decreasing the performance of the server (as one process may have to wait for another process to release its lock, thereby affecting the response time and throughput). Deadlocks cause more severe damage. A deadlock causes one transaction to be aborted and transaction must be restarted by the application. If a deadlock occurs very often, it severely affects the throughput of the application.

Target of the test : A Sybase ASE (Below v15) server

Agent deploying the test : An internal agent

Outputs of the test : One set of results for every Sybase server being monitored.

Configurable parameters for the test

Parameter	Description
Test Period	How often should the test be executed.
Host	Refers to the IP address of the Sybase server.
Port	The port number at which the Sybase server listens to.
User	A Sybase user who has the “sa_role”.
Password	The password corresponding to the above user.
Confirm Password	Confirm the password by retyping it here.
Detailed Diagnosis	<p>To make diagnosis more efficient and accurate, the eG Enterprise suite embeds an optional detailed diagnostic capability. With this capability, the eG agents can be configured to run detailed, more elaborate tests as and when specific problems are detected. To enable the detailed diagnosis capability of this test for a particular server, choose the On option. To disable the capability, click on the Off option.</p> <p>The option to selectively enable/disable the detailed diagnosis capability will be available only if the following conditions are fulfilled:</p> <ul style="list-style-type: none"> • The eG manager license should allow the detailed diagnosis capability • Both the normal and abnormal frequencies configured for the detailed diagnosis measures should not be 0.

Measurements made by the test

Measurement	Description	Measurement Unit	Interpretation
Lock requests	The average number of lock requests per second	Locks/sec	A high value indicates that there is high locking activity in the system and may need close scrutiny for the type of locks being requested. The detailed diagnosis for this measure provides a listing of locks requests for each lock type.

Measurement	Description	Measurement Unit	Interpretation
Lock waits	The average number of times there was lock contention	Waits/sec	<p>A high value of waits can have an adverse impact on application performance. Possible reasons for this behavior could be:</p> <ul style="list-style-type: none"> • Inadequate number of locks available in the database • Unusually high locking behavior of applications accessing the database • Improper database application design, etc. <p>The detailed diagnosis for this measure provides a listing of waited number of locks for each lock type.</p>
Avg lock wait time	The average amount of wait time for each lock request that resulted in a wait	Secs	<p>A high value may indicate that there is contention for locks in the system. When the average wait time for locks is high, users may have to wait for their transactions to complete.</p>
Lock timeouts	The number of times a task was waiting for a lock and the transaction was rolled back due to a session-level or server-level lock timeout	Timeouts/Sec	<p>Lock timeouts can be useful for removing tasks that acquire some locks, and then wait for long periods of time blocking other users. The detailed diagnosis for this measure provides a listing of lock timeouts for each lock type.</p>
Deadlocks	The average number of deadlocks found in the lock requests	Number	<p>A deadlock may arise due to various situations including bad design of queries and deficient coding practices. A deadlock is a situation where both/all the lock requestors are in a mutual or a multi-way tie. Any deadlocks are detrimental to database application performance. The detailed diagnosis</p>

Measurement	Description	Measurement Unit	Interpretation
			for this measure provides a listing of number of dead locks for each lock type.

3.2.2 Sybase Lock Stats Test

A Sybase server provides data concurrency and integrity between transactions using locking mechanisms. The locking activity of a database server must be monitored carefully because an application holding a specific lock for a long time could cause a number of other transactions relying on the same lock to fail. The SybaseLockStats test monitors the locking activity on a database server instance.

Target of the test : A Sybase ASE (Below v15) server

Agent deploying the test : An internal agent

Outputs of the test : One set of results for every Sybase instance monitored.

Configurable parameters for the test

Parameter	Description
Test Period	How often should the test be executed.
Host	Refers to the IP address of the Sybase server.
Port	The port number at which the Sybase server listens to.
User	A Sybase user who has the “sa_role”.
Password	The password corresponding to the above user.
Confirm Password	Confirm the password by retyping it here.
Detailed Diagnosis	To make diagnosis more efficient and accurate, the eG Enterprise suite embeds an optional detailed diagnostic capability. With this capability, the eG agents can be configured to run detailed, more elaborate tests as and when specific problems are detected. To enable the detailed diagnosis capability of this test for a particular server, choose the On option. To disable the capability, click on the Off option. The option to selectively enable/disable the detailed diagnosis capability will be available only if the following conditions are fulfilled:

Parameter	Description
	<ul style="list-style-type: none"> • The eG manager license should allow the detailed diagnosis capability • Both the normal and abnormal frequencies configured for the detailed diagnosis measures should not be 0.

Measurements made by the test

Measurement	Description	Measurement Unit	Interpretation
Locks	Gives the total number of locks that are held.	Number	<p>A high value may indicate one of the following:</p> <ul style="list-style-type: none"> a. Too many transactions happening b. Locked resources not being released properly c. Locks are being held unnecessarily.
Avg block time due to locks	Indicates the average time for which a process is blocked	Secs	<p>A high value may indicate one of the following:</p> <ul style="list-style-type: none"> a. Locked resources not being released properly b. Locks are being held unnecessarily. <p>The detailed diagnosis of this measure, if enabled, provides the complete information (i.e. duration for which the lock was held, the object that was locked, the type of lock held, etc.) pertaining to the locks that are being held currently.</p>

3.2.3 Sybase Cache Test

This test reports the statistics pertaining to the default data cache and for all the named caches configured in a Sybase database server.

Target of the test : A Sybase ASE (Below v15) server

Agent deploying the test : An internal agent

Outputs of the test : One set of results for the default cache and every named cache being monitored.

Configurable parameters for the test

Parameter	Description
Test Period	How often should the test be executed.
Host	Refers to the IP address of the Sybase server.
Port	The port number at which the Sybase server listens to.
User	A Sybase user who has the “sa_role”.
Password	The password corresponding to the above user
Confirm Password	Confirm the password by retyping it here.
Detailed Diagnosis	<p>To make diagnosis more efficient and accurate, the eG Enterprise suite embeds an optional detailed diagnostic capability. With this capability, the eG agents can be configured to run detailed, more elaborate tests as and when specific problems are detected. To enable the detailed diagnosis capability of this test for a particular server, choose the On option. To disable the capability, click on the Off option.</p> <p>The option to selectively enable/disable the detailed diagnosis capability will be available only if the following conditions are fulfilled:</p> <ul style="list-style-type: none"> • The eG manager license should allow the detailed diagnosis capability • Both the normal and abnormal frequencies configured for the detailed diagnosis measures should not be 0.

Measurements made by the test

Measurement	Description	Measurement Unit	Interpretation
Cache utilization	The number of searches using this cache as a percentage of searches across all caches.	Percent	Compare this value for each cache to determine if there are caches that are over or under-utilized. If you decide that a cache is not well utilized, you can

Measurement	Description	Measurement Unit	Interpretation
			<ul style="list-style-type: none"> Change the cache bindings to balance utilization Resize the cache to correspond more appropriately to its utilization
Cache hit ratio	The percentage of times that a required page was found in the data cache.	Percent	A low value indicates that the cache may be too small for the current application load.
Spinlock contention	The number of times an engine encountered spinlock contention on the cache, and had to wait, as a percentage of the total spinlock requests for that cache.	Percent	If spinlock contention is more than 10%, consider using named caches or adding cache partitions.
Buffers grabbed	The average number of times that Adaptive Server fetched a buffer from the LRU end of the cache, replacing a database page.	Buffers/Sec	The detailed diagnosis of this measure, if enabled, reports the buffers grabbed for each configured memory pool. If this value is high in some pools and low in other pools, you might want to move space from the less active pool to the more active pool, especially if it can improve the cache-hit ratio.
Dirty buffers grabbed	The average number of times that fetching a buffer found a dirty page at the LRU end of the cache and had to wait while the buffer was written to disk.	Buffers/Sec	A nonzero value indicates that the wash area of the pool is too small for the throughput in the pool. The detailed diagnosis of this measure, if enabled, reports the dirty buffers grabbed for each configured memory pool.
Large I/Os denied	The number of large I/O requests denied as a percentage of the total number of requests made	Percent	<p>Large I/O requests are denied due to the following reasons:</p> <ul style="list-style-type: none"> If any page in a buffer already resides in another pool. When there are no buffers available

Measurement	Description	Measurement Unit	Interpretation
			<p>in the requested pool.</p> <ul style="list-style-type: none"> On the first extent of an allocation unit, since it contains the allocation page, which is always read into the 2K pool. <p>If a high percentage of large I/Os were denied, it indicates that the use of the large pools might not be as effective as it could be.</p>
Large I/O effectiveness	The total number of pages that were used after being brought into cache by large I/O	Percent	A low value indicates that only few of the pages brought into cache are being accessed by queries.

3.2.4 Sybase Proc Cache Test

This test reports the procedure cache statistics of a Sybase database server.

Target of the test : A Sybase ASE (Below v15) server

Agent deploying the test : An internal agent

Outputs of the test : One set of results for every Sybase ASE (Below v15) server being monitored.

Configurable parameters for the test

Parameter	Description
Test Period	How often should the test be executed.
Host	Refers to the IP address of the Sybase server.
Port	The port number at which the Sybase server listens to.
User	A Sybase user who has the “sa_role”.
Password	The password corresponding to the above user.
Confirm Password	Confirm the password by retyping it here.

Measurements made by the test

Measurement	Description	Measurement Unit	Interpretation
Procedure requests	The number of times stored procedures were executed	Trans/Sec	
Disk reads	The number of times that stored procedures were read from disk rather than found and copied in the procedure cache	Reads/Sec	If this value is consistently high, increase the procedure cache size.
Cache hit ratio	Percentage of procedure requests served from cache	Percent	If this value is low, consider increasing procedure cache memory or add more memory to the server.
Procedures created	The number of procedures created during the sample interval	Procedures/Sec	
Procedures aged out of cache	The number of times that a procedure aged out of cache	Procedures/Sec	

3.3 The Syb Devices Layer

This layer tracks the health of the devices in a database. Figure 3.4 shows the tests that correspond to this layer.



Figure 3.4: Tests mapping to the Syb Devices layer

3.3.1 Sybase Devices Test

This test, executed by an internal agent, tracks statistics pertaining to the devices of the Sybase adaptive server.

Target of the test : A Sybase ASE (Below v15) server

Agent deploying the test : An internal agent

Outputs of the test : One set of results for every Sybase ASE (Below v15) server being monitored

Configurable parameters for the test

Parameter	Description
Test Period	How often should the test be executed.
Host	Refers to the IP address of the Sybase server.
Port	The port number at which the Sybase server listens to.
User	A Sybase user who has the “sa_role”.
Password	The password corresponding to the above user.
Confirm Password	Confirm the password by retyping it here.

Measurements made by the test

Measurement	Description	Measurement Unit	Interpretation
I/O requests	The average number of IO requests for a device	IOs/Sec	
Physical reads	The average number of reads performed on a device	Reads/Sec	
Physical writes	The average number of writes performed on a device	Writes/Sec	
I/O errors	The percentage of times there was an error in IO requests	Percent	

Measurement	Description	Measurement Unit	Interpretation
I/O waits	The percentage of times the semaphore was busy and the IO operation had to wait for the semaphore to be released	Percent	When Adaptive Server needs to perform a disk I/O, it gives the task the semaphore for that device in order to acquire a block I/O structure. On SMP systems, multiple engines can try to post I/Os to the same device simultaneously. This creates contention for that semaphore, especially if there are hot devices or if the data is not well distributed across devices. A large value could indicate a semaphore contention issue. One solution might be to redistribute the data on the physical devices.

3.4 The Syb Databases Layer

Using the SybaseDatabaseSpaceUsage test associated with it, the **Syb Databases** layer monitors the space usage of each of the databases on the Sybase Adaptive server, and reports whether any database is experiencing excessive space usage or insufficient space allocation.



Figure 3.5: The tests associated with the Syb Databases layer

3.4.1 Sybase Database Space Usage Test

This test reports the space usage of all Sybase databases.

Target of the test : A Sybase ASE (Below v15) server

Agent deploying the test : An internal agent

Outputs of the test : One set of results for every Sybase ASE (Below v15) server being monitored.

Configurable parameters for the test

Parameter	Description
Test Period	How often should the test be executed.
Host	Refers to the IP address of the Sybase server.
Port	The port number at which the Sybase server listens to.
User	A Sybase user who has the “sa_role”.
Password	The password corresponding to the above user.
Confirm Password	Confirm the password by retyping it here.
Include DB	Specify a comma-separated list of databases that you wish to monitor in the Include DB text box. By default, this is set to <i>all</i> .
Exclude DB	Specify a comma-separated list of databases that you wish to exclude from the scope of monitoring in the Exclude DB text box. By default, this is set to <i>none</i> .

Measurements made by the test

Measurement	Description	Measurement Unit	Interpretation
Total size	The space allocated to a database.	MB	
Reserved space percent	The percentage of space reserved for tables and indexes of a database.	Percent	If the value of this measure reaches 100%, it indicates that the total space in the database has been completely allocated. New tables/indexes can be added to the database, only if its total size is increased.
Reserved space	The amount of space allocated to the tables and indexes created on a database.	MB	If the value of this measure becomes equal to that of the <i>Total size</i> measure, new tables/indexes can no longer be created on the database. To create new tables, you must increase the database size.
Data space	The amount of space used by data.	MB	

Measurement	Description	Measurement Unit	Interpretation
Index space	The amount of space used by indexes.	MB	
Unused space	The amount of free space available in the database.	MB	

3.4.2 The Syb Service Layer

This layer tracks the health of the database server by looking into how the database is responding to the applications. The tests associated with this layer are shown in Figure 3.6.



Figure 3.6: Tests mapping to the Syb Service layer

3.4.3 Sybase System Processes Test

This test reports details about the system processes running in a Sybase database server.

Target of the test : A Sybase ASE (Below v15) server

Agent deploying the test : An internal agent

Outputs of the test : One set of results for every Sybase server being monitored.

Configurable parameters for the test

Parameter	Description
Test Period	How often should the test be executed.
Host	Refers to the IP address of the Sybase server.
Port	The port number at which the Sybase server listens to.

Parameter	Description
User	A Sybase user who has the "sa_role".
Password	The password corresponding to the above user.
Confirm Password	Confirm the password by retyping it here.
Detailed Diagnosis	<p>To make diagnosis more efficient and accurate, the eG Enterprise suite embeds an optional detailed diagnostic capability. With this capability, the eG agents can be configured to run detailed, more elaborate tests as and when specific problems are detected. To enable the detailed diagnosis capability of this test for a particular server, choose the On option. To disable the capability, click on the Off option.</p> <p>The option to selectively enable/disable the detailed diagnosis capability will be available only if the following conditions are fulfilled:</p> <ul style="list-style-type: none"> • The eG manager license should allow the detailed diagnosis capability • Both the normal and abnormal frequencies configured for the detailed diagnosis measures should not be 0.

Measurements made by the test

Measurement	Description	Measurement Unit	Interpretation
Sybase processes	The total number of Sybase processes	Number	
Background processes	The total number of background processes run by the Adaptive Server rather than by a user process	Number	The detailed diagnosis of this measure, if enabled, provides the details pertaining to the background processes currently executing.
Running processes	The total number of running processes	Number	The detailed diagnosis of this measure, if enabled, provides details such as the ID of the running processes, the user executing each of the processes, the database on which every process is executing etc.
Sleeping processes	The total number of sleeping processes	Number	The detailed diagnosis of this measure, if enabled, provides details such as the ID of the sleeping processes, the user executing each of

Measurement	Description	Measurement Unit	Interpretation
			the processes, the database on which every process is executing, the sleep status, sleep time etc.
Infected processes	The total number of processes in which the server has detected a serious error condition	Number	The detailed diagnosis of this measure, if enabled, provides the ID of the infected processes, the user executing each of the processes, and the database on which every process is executing. This information enables the user to isolate the specific queries that are infected. Further analysis of these queries can be performed, in order to figure out the reason for the infection and take adequate measures to prevent it from recurring.
Blocked processes	If a process attempts to access a resource that is already in use by another process, then such a process will be blocked until such time that the other process releases the resource. This measure indicates the total number of blocked processes.	Number	The detailed diagnosis of this measure, if enabled, reveals information such as the ID of the blocked processes, the user executing each of the processes, the database on which every process is executing, the waiting time of the blocked process, etc.

3.4.4 Sybase Responses Test

This test, executed by an internal agent, tracks the statistics pertaining to the availability and response time of the Sybase adaptive server.

Target of the test : A Sybase ASE (Below v15) server

Agent deploying the test : An internal agent

Outputs of the test : One set of results for every Sybase server being monitored.

Configurable parameters for the test

Parameter	Description
Test Period	How often should the test be executed.
Host	Refers to the IP address of the Sybase server.
Port	The port number at which the Sybase server listens to.
User	A Sybase user who has the “sa_role”.
Password	The password corresponding to the above user.
Confirm Password	Confirm the password by retyping it here.
Query	By default, this parameter is set to <i>select * from sysobjects</i> . The test executes this query to report the availability and responsiveness of the server. If the user configured for this test does not have the right to execute the default query, then the Query parameter can be overridden with a query that user has permission to execute.

Measurements made by the test

Measurement	Description	Measurement Unit	Interpretation
Sybase server availability	Indicates if the database instance is responding to requests or not.	Percent	<p>A value of 100 for this measure indicates that the database is responding to a request. On the other hand, a value of 0 denotes that the database is not responding.</p> <p>Availability problems may be caused by a misconfiguration/malfunctioning of the database instance, or because the instance is using an invalid user account. Besides the above, this measure will report that the server is unavailable even if a connection to the database instance is unavailable, or if a query to the database fails. In this case, you can check the values of the DB connection availability and Query processor availability measures to know what is exactly causing the database instance to</p>

Measurement	Description	Measurement Unit	Interpretation
			not respond to requests - is it owing to a connection unavailability? or is it due to a query failure?
Total response time	Indicates the time taken by the database server to respond to a user query. This is the sum total of the connection time and query execution time.	Secs	A sudden increase in response time is indicative of a potential performance bottleneck on the database server.
DB connection availability	Indicates whether the database connection is available or not.	Percent	If this measure reports the value 100 , it indicates that the database connection is unavailable. The value 0 on the other hand indicates that the database connection is unavailable. A connection to the database may be unavailable if the database is down or if the database is listening on a port other than the one configured for it in the eG manager. If the Availability measure reports the value 0, then, you can check the value of this measure to determine whether/not it is due to the unavailability of a connection to the server.
Query processor availability	Indicates whether the database query is executed successfully or not.	Percent	If this measure reports the value 100, it indicates that the query executed successfully. The value 0 on the other hand indicates that the query failed. In the event that the Availability measure reports the value 0, check the value of this measure to figure out whether the failed query is the reason why that measure reported a server unavailability.
Connection time to database server	Indicates the time taken by the database connection.	Secs	A high value could indicate a connection bottleneck. Whenever the Response time of the measure soars, you may want to check the value of this measure to determine whether a connection latency

Measurement	Description	Measurement Unit	Interpretation
			is causing the poor responsiveness of the server.
Query execution time	Indicates the time taken for query execution.	Secs	A high value could indicate that one/more queries to the database are taking too long to execute. Inefficient/badly designed queries to the database often run for long periods. If the value of this measure is higher than that of the Connection time measure, you can be rest assured that long running queries are the ones causing the responsiveness of the server to suffer.
Records fetched	Indicates the number of records fetched from the database.	Number	The value 0 indicates that no records are fetched from the database

3.4.5 Sybase System Processes Test

This test reports details about the system processes running in a Sybase database server.

Target of the test : A Sybase ASE (Below v15) server

Agent deploying the test : An internal agent

Outputs of the test : One set of results for every Sybase server being monitored.

Configurable parameters for the test

Parameter	Description
Test Period	How often should the test be executed.
Host	Refers to the IP address of the Sybase server.
Port	The port number at which the Sybase server listens to.
User	A Sybase user who has the “sa_role”.
Password	The password corresponding to the above user.
Confirm Password	Confirm the password by retyping it here.

Parameter	Description
Detailed Diagnosis	<p>To make diagnosis more efficient and accurate, the eG Enterprise suite embeds an optional detailed diagnostic capability. With this capability, the eG agents can be configured to run detailed, more elaborate tests as and when specific problems are detected. To enable the detailed diagnosis capability of this test for a particular server, choose the On option. To disable the capability, click on the Off option.</p> <p>The option to selectively enable/disable the detailed diagnosis capability will be available only if the following conditions are fulfilled:</p> <ul style="list-style-type: none"> • The eG manager license should allow the detailed diagnosis capability • Both the normal and abnormal frequencies configured for the detailed diagnosis measures should not be 0.

Measurements made by the test

Measurement	Description	Measurement Unit	Interpretation
Sybase processes	The total number of Sybase processes	Number	
Background processes	The total number of background processes run by the Adaptive Server rather than by a user process	Number	The detailed diagnosis of this measure, if enabled, provides the details pertaining to the background processes currently executing.
Running processes	The total number of running processes	Number	The detailed diagnosis of this measure, if enabled, provides details such as the ID of the running processes, the user executing each of the processes, the database on which every process is executing etc.
Sleeping processes	The total number of sleeping processes	Number	The detailed diagnosis of this measure, if enabled, provides details such as the ID of the sleeping processes, the user executing each of the processes, the database on which every process is executing, the sleep status, sleep time etc.

Measurement	Description	Measurement Unit	Interpretation
Infected processes	The total number of processes in which the server has detected a serious error condition	Number	The detailed diagnosis of this measure, if enabled, provides the ID of the infected processes, the user executing each of the processes, and the database on which every process is executing. This information enables the user to isolate the specific queries that are infected. Further analysis of these queries can be performed, in order to figure out the reason for the infection and take adequate measures to prevent it from recurring.
Blocked processes	If a process attempts to access a resource that is already in use by another process, then such a process will be blocked until such time that the other process releases the resource. This measure indicates the total number of blocked processes.	Number	The detailed diagnosis of this measure, if enabled, reveals information such as the ID of the blocked processes, the user executing each of the processes, the database on which every process is executing, the waiting time of the blocked process, etc.

3.4.6 Sybase Tasks Test

This test reports statistics pertaining to the tasks performed by the Sybase database engine.

Target of the test : A Sybase ASE (Below v15) server

Agent deploying the test : An internal agent

Outputs of the test : One set of results for every Sybase server being monitored.

Configurable parameters for the test

Parameter	Description
Test Period	How often should the test be executed.
Host	Refers to the IP address of the Sybase server.

Parameter	Description
Port	The port number at which the Sybase server listens to.
User	A Sybase user who has the “sa_role”.
Password	The password corresponding to the above user.
Confirm Password	Confirm the password by retyping it here.
Detailed Diagnosis	<p>To make diagnosis more efficient and accurate, the eG Enterprise suite embeds an optional detailed diagnostic capability. With this capability, the eG agents can be configured to run detailed, more elaborate tests as and when specific problems are detected. To enable the detailed diagnosis capability of this test for a particular server, choose the On option. To disable the capability, click on the Off option.</p> <p>The option to selectively enable/disable the detailed diagnosis capability will be available only if the following conditions are fulfilled:</p> <ul style="list-style-type: none"> • The eG manager license should allow the detailed diagnosis capability • Both the normal and abnormal frequencies configured for the detailed diagnosis measures should not be 0.

Measurements made by the test

Measurement	Description	Measurement Unit	Interpretation
Connections opened	The rate at which connections are opened	Conns/Sec	This provides a general understanding of the Adaptive Server environment and the work load during the measure interval.
Task switches	The rate at which the Adaptive Server switched context from one user task to another	Switches/Sec	The detailed diagnosis of this measure, if enabled, reports the percentage of times the context switch was due to each cause.

3.4.7 Sybase Transaction Log Test

This test reports statistics pertaining to the transaction logs of a Sybase database server.

Target of the test : A Sybase ASE (Below v15) server

Agent deploying the test : An internal agent

Outputs of the test : One set of results for every Sybase server being monitored.

Configurable parameters for the test

Parameter	Description
Test Period	How often should the test be executed.
Host	Refers to the IP address of the Sybase server.
Port	The port number at which the Sybase server listens to.
User	A Sybase user who has the “sa_role”.
Password	The password corresponding to the above user.
Confirm Password	Confirm the password by retyping it here.
Detailed Diagnosis	<p>To make diagnosis more efficient and accurate, the eG Enterprise suite embeds an optional detailed diagnostic capability. With this capability, the eG agents can be configured to run detailed, more elaborate tests as and when specific problems are detected. To enable the detailed diagnosis capability of this test for a particular server, choose the On option. To disable the capability, click on the Off option.</p> <p>The option to selectively enable/disable the detailed diagnosis capability will be available only if the following conditions are fulfilled:</p> <ul style="list-style-type: none"> • The eG manager license should allow the detailed diagnosis capability • Both the normal and abnormal frequencies configured for the detailed diagnosis measures should not be 0.

Measurements made by the test

Measurement	Description	Measurement Unit	Interpretation
ULC log writes	The rate at which log records per transaction are written into the ULCs	Records/Sec	If this data is unusual, study the Max ULC size measure and look at your application for long-running transactions and for transactions that modify a large number of rows.
Waits for ULC log writes	The rate at which attempts made to write to ULCs encountered semaphore contention	Waits/Sec	

Measurement	Description	Measurement Unit	Interpretation
ULC flushes	The rate at which user log caches (ULCs) were flushed to a transaction log	Flushes/Sec	The detailed diagnosis for this measure provides the percentage of ULC flushes due to full ULC, end transaction, change of database, system log record and other reasons.
Waits for ULC flushes	The rate at which attempts made to flush ULC pages to the log encountered log semaphore contention	Waits/Sec	<p>If this value is high, reduce the semaphore contention by:</p> <ul style="list-style-type: none"> Increasing the ULC size, if filling user log caches is a frequent cause of user log cache flushes Reducing log activity through transaction redesign. Aim for more batching with less frequent commits. Be sure to monitor lock contention as part of the transaction redesign. Reducing the number of multidatabase transactions, since each change of database context requires a log write. Dividing the database into more than one database so that there are multiple logs. If you choose this solution, divide the database in such a way that multidatabase transactions are minimized.
Max ULC size	The maximum number of bytes used in any ULCs, across all ULCs. This data can help you determine if ULC size is correctly configured.	KB	If this value is consistently less than the defined value for the user log cache size configuration parameter, reduce the user log cache size to Max ULC size value.

Measurement	Description	Measurement Unit	Interpretation
Log allocations	The rate at which additional pages were allocated to the transaction log	Allocations/Sec	This data is useful for comparing to other data in this test and for tracking the rate of transaction log growth.
Transaction log writes	The rate at which the Adaptive server wrote a transaction log page to disk	Pages/Sec	
Avg writes per log page	The average number of times each log page was written to disk	Writes/Page	In high throughput applications, this number should be as low as possible.

3.4.8 Sybase Transactions Test

This test reports the transaction statistics of a Sybase database server.

Target of the test : A Sybase ASE (Below v15) server

Agent deploying the test : An internal agent

Outputs of the test : One set of results for every Sybase server being monitored.

Configurable parameters for the test

Parameter	Description
Test Period	How often should the test be executed.
Host	Refers to the IP address of the Sybase server.
Port	The port number at which the Sybase server listens to.
User	A Sybase user who has the “sa_role”.
Password	The password corresponding to the above user.
Confirm Password	Confirm the password by retyping it here.

Measurements made by the test

Measurement	Description	Measurement Unit	Interpretation
Committed transactions	The rate of transaction commits	Trans/Sec	
Rolledback transactions	The rate of transactions rollbacks	Trans/Sec	Rollbacks are costly operations on the database, and hence, will have to be kept at the minimum.
Inserts	The rate at which records are inserted into the database	Inserts/Sec	
Updates	The rate at which records in the database are updated	Updates/Sec	
Deletes	The rate at which records are deleted from the database	Deletes/Sec	

3.4.9 Sybase Blockers Test

One common problem encountered with databases is blocking. Suppose that process A is modifying data that process B wants to use. Process B will be blocked until process A has completed what it is doing. This is only one type of blocking situation; others exist and are common. What matters to a database administrator is identifying when blocking is a problem and how to deal with it effectively. When blocking is bad enough, users will notice slowdowns and complain about it. With a large number of users, it is common for tens or hundreds of processes to be blocked when slowdowns are noticed. Killing these processes may or may not solve the problem because 10 processes may be blocked by process B, while process B itself is blocked by process A. Issuing 10 kill statements for the processes blocked by B probably will not help, as new processes will simply become blocked by B. Killing process B may or may not help, because then the next process that was blocked by B, which is given execution time, may get blocked by process A and become the process that is blocking the other 9 remaining processes. When you have lots of blocking that is not resolving in a reasonable amount of time you need to identify the root blocker, or the process at the top of the tree of blocked processes. Imagine again that you have 10 processes blocked by process B, and process B is blocked by process A. If A is not blocked by anything, but is itself responsible for lots of blocking (B and the 10 processes waiting on B), then A would be the root blocker. (Think of it as a traffic jam.) Killing A (via kill) is likely to unblock B, and once B completes, the 10 processes waiting on B are also

likely to complete successfully. The SybaseBlockers test monitors the number of root blocker processes in a database.

Target of the test : A Sybase ASE (Below v15) server

Agent deploying the test : An internal agent

Outputs of the test : One set of results for every Sybase server being monitored

Configurable parameters for the test

Parameter	Description
Test Period	How often should the test be executed.
Host	Refers to the IP address of the Sybase server.
Port	The port number at which the Sybase server listens to.
User	A Sybase user who has the “sa_role”.
Password	The password corresponding to the above user
Confirm Password	Confirm the password by retyping it here.
Detailed Diagnosis	<p>To make diagnosis more efficient and accurate, the eG Enterprise suite embeds an optional detailed diagnostic capability. With this capability, the eG agents can be configured to run detailed, more elaborate tests as and when specific problems are detected. To enable the detailed diagnosis capability of this test for a particular server, choose the On option. To disable the capability, click on the Off option.</p> <p>The option to selectively enable/disable the detailed diagnosis capability will be available only if the following conditions are fulfilled:</p> <ul style="list-style-type: none"> • The eG manager license should allow the detailed diagnosis capability • Both the normal and abnormal frequencies configured for the detailed diagnosis measures should not be 0.

Measurements made by the test

Measurement	Description	Measurement Unit	Interpretation
Number of root blockers	Indicates the number of root blocker processes.	Number	Usually, the number of root blocker processes should be low. If this value increases suddenly, this is a cause for

Measurement	Description	Measurement Unit	Interpretation
			concern. Likewise, if a root-blocker process has been blocking other processes for a long time, it is a reason for further investigation. The detailed diagnosis for this test, if enabled, provides details of the root blocker processes - their SPIDs, programs running these processes, and the queries being issued by these processes. It is usually the case that killing any root-blocker process that has been running for a long while will get the database running well again.

3.4.10 Sybase Applications Test

Sometimes the database performs poorly due, not to blocking, but to particularly heavy loads. Often the DBA will determine that the database simply cannot support the work that it is being asked to do and maintain adequate performance. This does not necessarily mean it is time to create more indexes or throw more hardware at the problem. One cannot always assume that periods of high utilization represent legitimate work. There could be problems in the applications that are running, or even problems caused by the user. Maybe the application has a data paging functionality, but the user has opted to receive the entire 100,000 row DataSet every time, even though she/he has applied a sort which gives her the one row she needs first with each query. Regardless, it is important to identify performance issues and eliminate them.

This test identifies which program has more connections open to (i.e., processes running in) the Sybase database. Simply looking at the CPU cycles taken up by a process will not indicate which of these processes has been most active recently. For example, the Sybase server internal processes may have been running for days and will probably always show up as the processes that have taken the most CPU time since the database booted up. Hence, it is more helpful to find processes that have used lots of CPU for the majority of the time that they have been connected. This value represents how “expensive” a process is with respect to the Sybase database server. For each program that connects to the database server, this test reports the total CPU cycles for each second that the program is connected to the database. This value, represented by the *CPU cycles rate* measure, is an aggregate of all the CPU cycles consumed by every instance of the program while it is connected to the database server. The *Avg CPU cycles rate* measure represents the *CPU cycles*

rate averaged across the number of processes in the database for the program under consideration. The *Avg CPU cycles rate* quantifies how bad a program is compared to the others, by dividing the *CPU cycles rate* by the number of connected instances. A high value for this value would indicate that every instance of the program was CPU-intensive. A lower value would indicate that the program may have some instances that cause performance problems, but also has instances that are mostly idle.

Target of the test : A Sybase ASE (Below v15) server

Agent deploying the test : An internal agent

Outputs of the test : One set of results for every program/application executing on the Sybase server being monitored.

Configurable parameters for the test

Parameter	Description
Test Period	How often should the test be executed.
Host	Refers to the IP address of the Sybase server.
Port	The port number at which the Sybase server listens to.
User	A Sybase user who has the “sa_role”.
Password	The password corresponding to the above user
Confirm Password	Confirm the password by retyping it here.
Detailed Diagnosis	<p>To make diagnosis more efficient and accurate, the eG Enterprise suite embeds an optional detailed diagnostic capability. With this capability, the eG agents can be configured to run detailed, more elaborate tests as and when specific problems are detected. To enable the detailed diagnosis capability of this test for a particular server, choose the On option. To disable the capability, click on the Off option.</p> <p>The option to selectively enable/disable the detailed diagnosis capability will be available only if the following conditions are fulfilled:</p> <ul style="list-style-type: none"> • The eG manager license should allow the detailed diagnosis capability • Both the normal and abnormal frequencies configured for the detailed diagnosis measures should not be 0.

Measurements made by the test

Measurement	Description	Measurement Unit	Interpretation
Number of processes	Indicates the number of database processes associated with a specific program.	Number	A comparison of this value across programs will indicate which program is initiating most connections to the database. Comparison of this value over time can provide indications of potential changes in database activity characteristics of a program.
CPU cycles rate	Indicates the number of CPU cycles consumed by all processes of a program, per minute of login.	Cycles/Sec	The higher the value, the more CPU resources that the program is taking in the database. The detailed diagnosis for this test provides details of the most expensive queries to the database - i.e., what host is a program running from, who is running it, and what application is running it, which database the program is accessing, etc.
Avg CPU cycles rate	Indicates the number of CPU cycles consumed by a process of a program, per minute of login.	CyclesRate/Conn	This value is the ratio of the CPU cycles rate to the number of processes for a program.

Chapter 4: How to Configure and Monitor Sybase ASE Server Using eG Enterprise?

eG Enterprise can monitor the Sybase ASE server in an agent-based or an agentless manner. In case of the agentless approach, the remote agent used to monitor the Sybase ASE server should be deployed on a remote Windows host in the environment.

The broad steps for configuring and monitoring Sybase ASE server using eG Enterprise are as follows:

- Configure the eG Agent to monitor the Sybase ASE Server using the MDA Tables. For the detailed discussion on this, refer to Section 4.1.
- Manage the Sybase ASE server and configure the tests pertaining to server to start monitoring the target server. See Section 4.2.

4.1 Configuring a Sybase ASE Server Using the MDA Tables

Starting Sybase ASE 12.5.3, users have the option of installing MDA tables on the Sybase server for accessing critical performance statistics pertaining to the server. If MDA tables are installed on a Sybase server, then, you can use the Sybase ASE monitoring model offered by eG Enterprise to monitor that Sybase server.

4.1.1 Configuring the eG Agent to Monitor the Sybase ASE Server Using the MDA Tables

To use the Sybase ASE model, the following pre-requisites need to be fulfilled:

- a. MDA tables should be installed on the Sybase ASE to be monitored;
- b. The eG agent should be configured with the user privileges required for monitoring. These privileges may differ across tests. While most tests need to be configured with the privileges of a user who has the "mon_role", the **Sybase Database Space Usage** test and the **Sybase Database Stats** test require the privileges of a user with the "mon_role" and "sa_role", and the **Sybase System Processes** test requires the "mon_role" and "sybase_ts_role". The test-specific documentation will shed more light on this. However, for best results, its recommended that you configure all tests with the credentials of a user with all three roles - "mon_role", "sa_role", and "sybase_ts_role".
- c. The following configuration parameters have to be enabled on the target Sybase server:

- enable monitoring
- sql text pipe active
- sql text pipe max messages
- statement pipe active
- statement pipe max messages
- errorlog pipe active
- errorlog pipe max messages
- deadlock pipe active
- deadlock pipe max messages
- wait event timing
- process wait events
- object lockwait timing
- SQL batch capture
- statement statistics active
- per object statistics active
- enable stmt cache monitoring
- max SQL text monitored
- performance monitoring option

4.2 Managing the Sybase ASE 15 Server

To manually add the Sybase ASE 15 Server component for monitoring using eG Enterprise , do the following:

1. Login to the administrative interface as an administrator (admin).
2. Specify **Sybase ASE 15** server as a new component in the **Component type** list box (see Figure 4.1) that appears in the **COMPONENTS** Page. Also, provide the **Host IP** and the **Nickname** for the component that is to be added. Then click on the **Add** button so that the new component will be added.

COMPONENT

This page enables the administrator to provide the details of a new component

Category	Component type
All	Sybase ASE 15

Component information

Host IP/Name	192.168.10.1
Nick name	syase15
Port number	5000

Monitoring approach

Agentless	<input type="checkbox"/>
Internal agent assignment	<input checked="" type="radio"/> Auto <input type="radio"/> Manual <div style="background-color: #0070C0; color: white; padding: 2px 10px; border-radius: 5px;">192.168.9.70</div>
External agents	

Add

Figure 4.1: Adding Sybase ASE server

3. Then proceed to signout of the page. A list of unconfigured tests (see Figure 4.2) for the Sybase ASE 15 server will then appear.

Performance			sybase15:5000
Sybase Segments	Processes	Sybase Applications	
Sybase Blockers	Sybase Data Cache	Sybase Database Space Usage	
Sybase DatabaseStats	Sybase Deadlocks	Sybase Device I/O	
Sybase Engine	Sybase Errors	Sybase Lock Waits	
Sybase Long Running Queries	Sybase Network I/O	Sybase Procedure Cache	
Sybase Process Waits	Sybase Responses	Sybase Statements	
Sybase System Processes	Sybase Users		

Figure 4.2: A table displaying the List of Unconfigured Tests for the Sybase ASE server

4. Click on the tests to configure. To know how to configure these tests, refer to **Monitoring the Sybase ASE Server Using the MDA Tables** chapter.
5. Finally, signing out of the admin interface.

Chapter 5: Monitoring the Sybase ASE Server Using the MDA Tables

Starting Sybase ASE 12.5.3, users have the option of installing MDA tables on the Sybase server for accessing critical performance statistics pertaining to the server. If MDA tables are installed on a Sybase ASE server, then, you can use the *Sybase ASE* monitoring model (see Figure 5.1) offered by eG Enterprise to monitor that Sybase server.

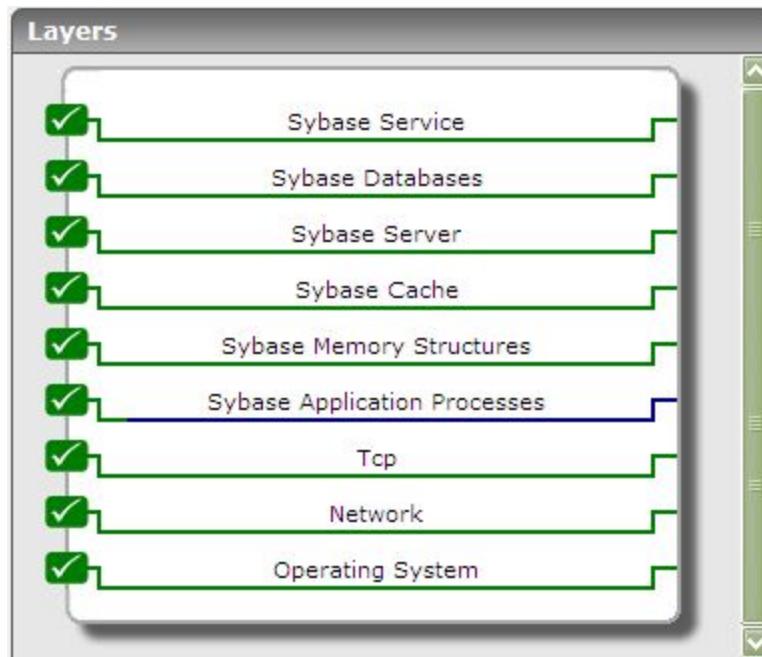


Figure 5.1: The Sybase ASE monitoring model

Once the pre-requisites are fulfilled, then the tests mapped to each layer of Figure 5.1 will periodically run queries on the MDA tables to report a wealth of performance information pertaining to the Sybase server. Using these metrics, administrators can find quick and easy answers to the following performance queries:

- Is the Sybase server available? If so, is it responding quickly to client requests?
- Has the error log captured any errors recently? If so, what are they?
- Did too many wait events occur on the Sybase server during the last measurement period? If so, what type of events are these? How long did these events wait?
- Did any deadlocks occur?

- Are too many locks being held? Which user and process initiated these locks?
- Have locks been held for an unusually long time?
- Are the data and procedure caches being used optimally?
- Have the caches been sized correctly?
- Is the server able to process I/O requests quickly, or are any bottlenecks visible?
- Is the Sybase engine using up CPU excessively?
- Is the traffic to and from the server high?
- Are there any sleeping, blocked, or infected processes on the server? If so, what are they?
- Is any database on the server using memory and space excessively? If so, which one is it?
- Have any queries been running on the server for a very long time? If so, what are the queries?
- How is the user load on the server?
- Have any users initiated sleeping or infected processes on the server? What are these processes?

The sections that follow will discuss each of the first 6 layers of Figure 5.1, elaborately.

5.1 Sybase Application Processes Layer

The tests mapped to this layer proactively alerts administrators to the following:

- Non-availability of the Sybase port;
- Non-availability of the processes that are crucial to the smooth functioning of the Sybase server;
- Excessive resource usage by one/more of these critical processes;
- Errors recently encountered by the server;



Figure 5.2: The tests mapped to the Sybase Application Processes layer

Since the **Tcp Port** and **Processes** tests have already been dealt with in the *Monitoring Unix and Windows Servers* document, the section that follows will handle the **Sybase ErrorLog** test only.

5.1.1 Sybase Errors Test

This test periodically monitors the Sybase server's error logs to promptly capture the errors that occur on the server and report the number and severity of the errors. For execution, this test requires the enable monitoring, errorlog pipe max messages, and errorlog pipe active configuration parameters to be enabled.

Target of the test : A Sybase ASE on which MDA tables have been installed

Agent deploying the test : An internal agent

Outputs of the test : One set of results for every Sybase Server being monitored.

Configurable parameters for the test

Parameter	Description
Test Period	How often should the test be executed.
Host	Refers to the IP address of the Sybase ASE server.
Port	The port number at which the Sybase server listens to.
User	To enable this test to connect to the Sybase server and collect the required metrics, it is enough if you configure the test with the name of a Sybase user who has the "mon_role". However, for best results, it is recommended that you configure all Sybase tests

Parameter	Description
	with the credentials of a Sybase user who has the “mon_role”, “sa_role”, and “sybase_ts_role”.
Password	The password corresponding to the above user
Confirm Password	Confirm the password by retying it here.
Detailed Diagnosis	<p>To make diagnosis more efficient and accurate, the eG Enterprise suite embeds an optional detailed diagnostic capability. With this capability, the eG agents can be configured to run detailed, more elaborate tests as and when specific problems are detected. To enable the detailed diagnosis capability of this test for a particular server, choose the On option. To disable the capability, click on the Off option.</p> <p>The option to selectively enable/disable the detailed diagnosis capability will be available only if the following conditions are fulfilled:</p> <ul style="list-style-type: none"> • The eG manager license should allow the detailed diagnosis capability • Both the normal and abnormal frequencies configured for the detailed diagnosis measures should not be 0.

Measurements made by the test

Measurement	Description	Measurement Unit	Interpretation
Error count severity 10-16	The number of errors with severity codes between 10 and 16, which occurred on the Sybase server during the last measurement period.	Number	<p>Error messages with severity levels 10-16 are generated by problems that are caused by user errors. These problems can always be corrected by the user.</p> <p>To view the list of problems in this category, use the detailed diagnosis of this measure.</p>
Error count severity 17-18	The number of errors with severity codes between 17 and 18, which occurred on the Sybase server during the last measurement period.	Number	<p>Error messages with severity level 17 mean that the command has caused Adaptive Server to run out of resources or to exceed some limit set by the System Administrator. You can continue with the work you are doing, although you may not be able to execute a particular command. The</p>

Measurement	Description	Measurement Unit	Interpretation
			<p>Database Owner can correct the level 17 error messages indicating that you have run out of space. Other level 17 error messages should be corrected by the System Administrator.</p> <p>Error messages with severity level 18 indicate some kind of internal software bug. However, the command runs to completion, and the connection to Adaptive Server is maintained. You can continue with the work you are doing, although you may not be able to execute a particular command. An example of a situation that generates severity level 18 is Adaptive Server detecting that a decision about the access path for a particular query has been made without a valid reason.</p> <p>Since problems that generate such messages do not keep users from their work, users tend not to report them. Users should be instructed to inform the System Administrator every time an error message with these severity levels (or higher) occur so that the System Administrator can report them.</p>
Error count severity 19-26	The number of errors with severity codes between 19 and 26, which occurred on the Sybase server during the last measurement period.	Number	<p>Level 19: Adaptive Server fatal error in resource</p> <p>Error messages with severity level 19 indicate that some non-configurable internal limit has been exceeded and that Adaptive Server cannot recover gracefully. You must reconnect to Adaptive Server.</p> <p>Level 20: Adaptive Server fatal error in current process</p>

Measurement	Description	Measurement Unit	Interpretation
			<p>Error messages with severity level 20 indicate that Adaptive Server has encountered a bug in a command. The problem has affected only the current process, and it is unlikely that the database itself has been damaged. Run dbcc diagnostics. You must reconnect to Adaptive Server.</p> <p>Level 21: Adaptive Server fatal error in database processes</p> <p>Error messages with severity level 21 indicate that Adaptive Server has encountered a bug that affects all the processes in the current database. However, it is unlikely that the database itself has been damaged. Restart Adaptive Server and run the dbcc diagnostics. You must reconnect to Adaptive Server.</p> <p>Level 22: Adaptive Server fatal error: Table integrity suspect</p> <p>Error messages with severity level 22 indicate that the table or index specified in the message was previously damaged by a software or hardware problem.</p> <p>The first step is to restart Adaptive Server and run dbcc to determine whether other objects in the database are also damaged. Whatever the report from dbcc may be, it is possible that the problem is in the cache only and not on the disk itself. If so, restarting Adaptive Server will fix the problem.</p> <p>If restarting does not help, then the problem is on the disk as well.</p>

Measurement	Description	Measurement Unit	Interpretation
			<p>Sometimes, the problem can be solved by dropping the object specified in the error message. For example, if the message tells you that Adaptive Server has found a row with length 0 in a nonclustered index, the table owner can drop the index and re-create it.</p> <p>Adaptive Server takes any pages or indexes offline that it finds to be suspect during recovery. Use <code>sp_setsuspect_granularity</code> to determine whether recovery marks an entire database or only individual pages as suspect. See <code>sp_setsuspect_granularity</code> in the Reference Manual for more information.</p> <p>You must reconnect to Adaptive Server.</p> <p>Level 24: Hardware error or system table corruption</p> <p>Error messages with severity level 24 reflect some kind of media failure or (in rare cases) the corruption of sysusages. The System Administrator may have to reload the database. It may be necessary to call your hardware vendor.</p> <p>Level 23: Fatal error: Database integrity suspect</p> <p>Error messages with severity level 23 indicate that the integrity of the entire database is suspect due to previous damage caused by a software or hardware problem. Restart Adaptive Server and run dbcc diagnostics.</p> <p>Even when a level 23 error indicates</p>

Measurement	Description	Measurement Unit	Interpretation
			<p>that the entire database is suspect, the damage may be confined to the cache, and the disk itself may be fine. If so, restarting Adaptive Server with startserver will fix the problem.</p> <p>Level 25: Adaptive Server internal error</p> <p>Level 25 errors are not displayed to the user; this level is only used for Adaptive Server internal errors.</p> <p>Level 26: Rule error</p> <p>Error messages with severity level 26 reflect that an internal locking or synchronization rule was broken. You must shut down and restart Adaptive Server.</p>
Total error count	The total number of errors that occurred on the Sybase server during the last measurement period.	Number	Ideally, this value should be 0.

5.2 Sybase Memory Structures Layer

This layer monitors wait events and the locking activity on the database server to identify areas where the server has been wasting resources. Using the tests mapped to this layer, administrators can quickly isolate the following:

- Wait events on which the server has spent the maximum time; who and which process initiated such an event;
- Deadlock situations;
- Locks that have been held for too long a time; who and which process initiated the lock, and which object held the lock for how long.

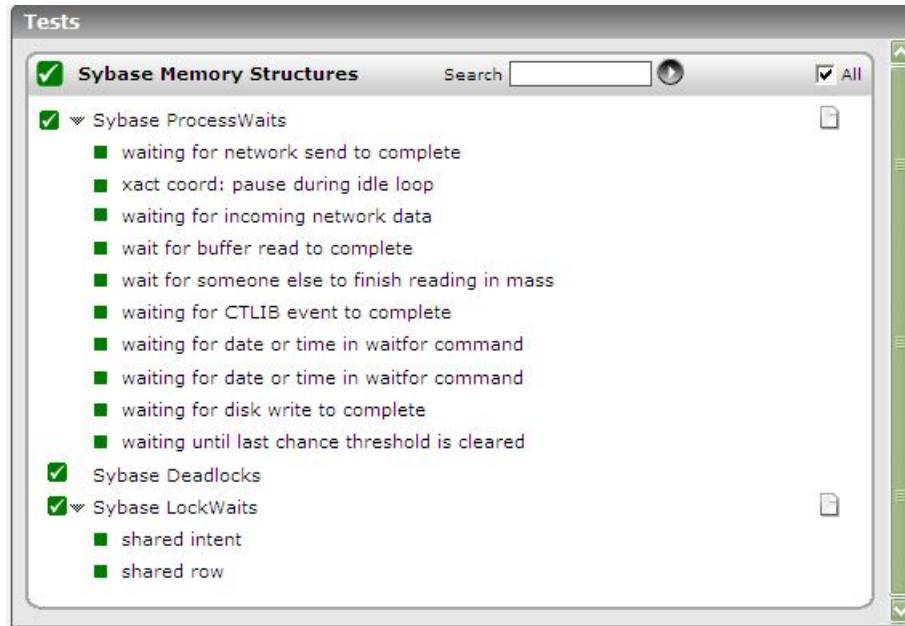


Figure 5.3: The tests associated with the Sybase Memory Structures layer

5.2.1 Sybase Process Waits Test

A wait event occurs when a server process suspends itself, sleeps, and waits for another event to wake it. The Sybase ASE includes unique wait event IDs for each of these wait events.

The test monitors each type of wait events on the Sybase database server and reports key performance statistics pertaining to every event type. For execution, this test requires the enable monitoring and process wait events configuration parameters to be enabled.

Target of the test : A Sybase ASE on which MDA tables have been installed

Agent deploying the test : An internal agent

Outputs of the test : One set of results for every wait event type being monitored.

Configurable parameters for the test

Parameter	Description
Test Period	How often should the test be executed.
Host	Refers to the IP address of the Sybase ASE server.
Port	The port number at which the Sybase server listens to.
User	To enable this test to connect to the Sybase server and collect the required metrics, it

Parameter	Description
	is enough if you configure the test with the name of a Sybase user who has the “mon_role”. However, for best results, it is recommended that you configure all Sybase tests with the credentials of a Sybase user who has the “mon_role”, “sa_role”, and “sybase_ts_role”.
Password	The password corresponding to the above user
Confirm Password	Confirm the password by retyping it here.
Detailed Diagnosis	<p>To make diagnosis more efficient and accurate, the eG Enterprise suite embeds an optional detailed diagnostic capability. With this capability, the eG agents can be configured to run detailed, more elaborate tests as and when specific problems are detected. To enable the detailed diagnosis capability of this test for a particular server, choose the On option. To disable the capability, click on the Off option.</p> <p>The option to selectively enable/disable the detailed diagnosis capability will be available only if the following conditions are fulfilled:</p> <ul style="list-style-type: none"> • The eG manager license should allow the detailed diagnosis capability • Both the normal and abnormal frequencies configured for the detailed diagnosis measures should not be 0.

Measurements made by the test

Measurement	Description	Measurement Unit	Interpretation
Number of waits	The number of events of this wait event type during the last measurement period.	Number	Use the detailed diagnosis of this measure to view the complete details of the wait events and to figure out who and which process initiated the event.
Avg wait time	The average wait time of events of this type.	Milliseconds	If this measure value is high for a particular event type when the value of the Number of waits measure is low, it could indicate that one/more events of that type have been waiting for a long time. The DBA might have to ensure that such wait events are minimal.

The detailed diagnosis of the *Number of waits* measure will reveal the description of the wait event, the user and the process that initiated the wait event, the total number of waits, and the total time waited.

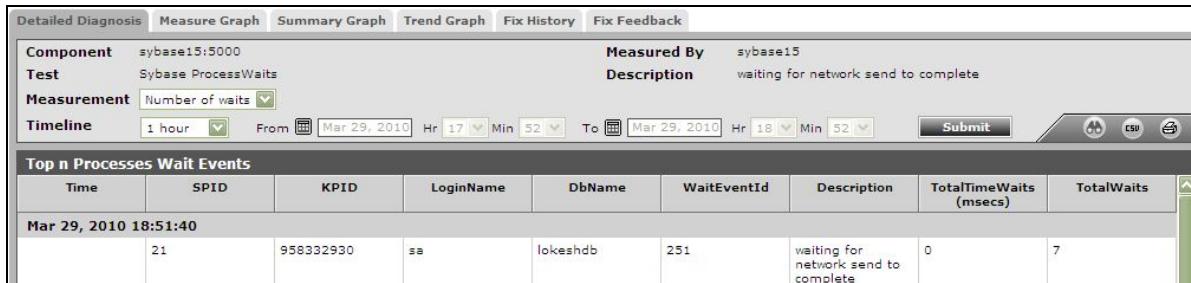


Figure 5.4: The detailed diagnosis of the Number of waits measure

5.2.2 Sybase Deadlocks Test

This test monitors the locking activity on the Sybase server, and reports the number of deadlocks. For this test to work, the following configuration parameters need to be enabled on the server:

- enable monitoring
- deadlock pipe max messages
- deadlock pipe active

Target of the test : A Sybase ASE server on which the MDA tables have been installed

Agent deploying the test : An internal agent

Outputs of the test : One set of results for every Sybase ASE server being monitored.

Configurable parameters for the test

Parameter	Description
Test Period	How often should the test be executed.
Host	Refers to the IP address of the Sybase ASE server.
Port	The port number at which the Sybase server listens to.
User	To enable this test to connect to the Sybase server and collect the required metrics, it is enough if you configure the test with the name of a Sybase user who has the “mon_role”. However, for best results, it is recommended that you configure all Sybase tests with the credentials of a Sybase user who has the “mon_role”, “sa_role”, and “sybase_”

Parameter	Description
	ts_role".
Password	The password corresponding to the above user
Confirm Password	Confirm the password by retying it here.
Detailed Diagnosis	<p>To make diagnosis more efficient and accurate, the eG Enterprise suite embeds an optional detailed diagnostic capability. With this capability, the eG agents can be configured to run detailed, more elaborate tests as and when specific problems are detected. To enable the detailed diagnosis capability of this test for a particular server, choose the On option. To disable the capability, click on the Off option.</p> <p>The option to selectively enable/disable the detailed diagnosis capability will be available only if the following conditions are fulfilled:</p> <ul style="list-style-type: none"> • The eG manager license should allow the detailed diagnosis capability • Both the normal and abnormal frequencies configured for the detailed diagnosis measures should not be 0.

Measurements made by the test

Measurement	Description	Measurement Unit	Interpretation
Number of deadlocks	The number of deadlocks found in the Sybase Server.	Number	A deadlock may arise due to various situations including bad design of queries and deficient coding practices. A deadlock is a situation where both/all the lock requestors are in a mutual or a multi-way tie. Any deadlocks are detrimental to database application performance. The detailed diagnosis for this measure provides a listing of dead locks for each lock type.

5.2.3 Sybase Lock Waits Test

For every lock type auto-discovered, this test reports the total number of locks currently held, and the average wait time for locks. For execution, this test requires the enable monitoring and wait event timing configuration parameters to be enabled.

Target of the test : A Sybase ASE server on which the MDA tables have been installed

Agent deploying the test : An internal agent

Outputs of the test : One set of results for every lock type being monitored

Configurable parameters for the test

Parameter	Description
Test Period	How often should the test be executed.
Host	Refers to the IP address of the Sybase ASE server.
Port	The port number at which the Sybase server listens to.
User	To enable this test to connect to the Sybase server and collect the required metrics, it is enough if you configure the test with the name of a Sybase user who has the “mon_role”. However, for best results, it is recommended that you configure all Sybase tests with the credentials of a Sybase user who has the “mon_role”, “sa_role”, and “sybase_ts_role”.
Password	The password corresponding to the above user
Confirm Password	Confirm the password by retying it here.
Detailed Diagnosis	<p>To make diagnosis more efficient and accurate, the eG Enterprise suite embeds an optional detailed diagnostic capability. With this capability, the eG agents can be configured to run detailed, more elaborate tests as and when specific problems are detected. To enable the detailed diagnosis capability of this test for a particular server, choose the On option. To disable the capability, click on the Off option.</p> <p>The option to selectively enable/disable the detailed diagnosis capability will be available only if the following conditions are fulfilled:</p> <ul style="list-style-type: none"> • The eG manager license should allow the detailed diagnosis capability • Both the normal and abnormal frequencies configured for the detailed diagnosis measures should not be 0.

Measurements made by the test

Measurement	Description	Measurement Unit	Interpretation
Number of locks	The number of locks of this type that are currently held.	Number	Ideally, both these values should be low. A large number of locks or a high wait time for locks can result in lock contention and can adversely impact

Measurement	Description	Measurement Unit	Interpretation
			<p>server performance. You can use the detailed diagnosis of the Number of locks measure to view the complete lock details and to determine the process and user responsible for the lock.</p> <p>Furthermore, you can use the following locking guidelines to reduce lock contention and speed performance:</p> <ul style="list-style-type: none"> • Use the lowest level of locking required by each application. Use isolation level 2 or 3 only when necessary. <p>Updates by other transactions may be delayed until a transaction using isolation level 3 releases any of its shared locks at the end of the transaction.</p> <p>Use isolation level 3 only when nonrepeatable reads or phantoms may interfere with your desired results.</p> <p>If only a few queries require level 3, use the holdlock keyword or at isolation serializing clause in those queries instead of using set transaction isolation level 3 for the entire transaction.</p> <p>If most queries in the transaction require level 3, use set transaction isolation level 3, but use noholdlock or at isolation read committed in the remaining queries that can execute at isolation level 1.</p> <p>If you need to perform mass inserts, updates, or deletes on active tables,</p>

Measurement	Description	Measurement Unit	Interpretation
			<p>you can reduce blocking by performing the operation inside a stored procedure using a cursor, with frequent commits.</p> <ul style="list-style-type: none"> • If your application needs to return a row, provide for user interaction, and then update the row, consider using timestamps and the tsequal function rather than holdlock. • If you are using third-party software, check the locking model in applications carefully for concurrency problems. <p>Also, other tuning efforts can help reduce lock contention. For example, if a process holds locks on a page, and must perform a physical I/O to read an additional page, it holds the lock much longer than it would have if the additional page had already been in cache.</p> <p>Better cache utilization or using large I/O can reduce lock contention in this case. Other tuning efforts that can pay off in reduced lock contention are improved indexing and good distribution of physical I/O across disks.</p> <p>Moreover, you can configure a server-wide lock-wait limit with the configuration parameter lock wait period. This can reduce lock wait time considerably.</p>
Avg wait time sec	The average wait time of	Secs	

Measurement	Description	Measurement Unit	Interpretation
	locks of this type.		

The detailed diagnosis of the Number of locks measure provides the complete lock details including the user and the process that initiated the lock, the object that has been locked, the lock type, the lock level, the lock wait time, and the exact page number and row number that has been locked. This information enables administrators to effectively troubleshoot lock-related issues, accurately identify what caused the lock, and optimize the process code/query so that, the lock is released.

List all the LockWaits Details														
Time	SPID	KPID	UserName	DbName	LockId	ObjectId	Object	LockState	LockType	LockLevel	WaitTime (secs)	PageNumber	RowNumber	
Mar 29, 2010 18:43:00														
	14	1048592	-	master	28	24	sysstatistics	Granted	shared intent	TABLE	0	-	-	-

Figure 5.5: The detailed diagnosis of the Number of locks measure

5.2.4 Sybase Spinlocks Test

Spinlocks are lightweight synchronization primitives which are used to protect access to shared resources. The spinlocks can only be updated automatically when the resource is accessed to perform a user task. The spinlock denies all other tasks access to the resource until the changes are made by the current user task as a result other user tasks are made to wait, this in turn causes spinlock contention. Although, the spinlocks are held for extremely brief durations, they can increase CPU resource utilization and reduce performance of the Sybase server with high transaction rates. Therefore, the spinlocks should be monitored to avoid such excess CPU utilization and performance lag of the Sybase server. The **Sybase Spinlocks** test helps administrators greatly in this exercise.

This test auto-discovers the named spinlocks and reports the percentage of spinlock contention on the resources, CPU cycle spinning activity, and grabs and waits of each spinlock.

Target of the test : A Sybase ASE server

Agent deploying the test : An internal agent

Outputs of the test : One set of results for each spinlock being monitored.

Configurable parameters for the test

Parameter	Description
Test Period	How often should the test be executed.
Host	Refers to the IP address of the Sybase server.
Port	The port through which the server communicates. By default, it is 1433.
User	To enable the eG agent to connect to the Sybase server and collect the required metrics, specify the credential of the Sybase user who has the “mon_role”.
Password	The password corresponding to the above user.
Confirm Password	Confirm the password by retying it here.

Measurements made by the test

Measurement	Description	Measurement Unit	Interpretation
Spinlock contention	Indicates the number of times an engine encountered this spinlock contention on the resource, and had to wait as a percentage of the total spinlock requests for that resource.	Percent	<p>The value of this measure should not exceed 10%. For example, if the spinlock contention is more than 10% in the cache, consider using named caches or adding cache partitions. The number of cache partitions is always a power of 2 such that you can approximately reduce half of the spinlock contention when you increase the number of partitions each time.</p> <p>The detailed diagnosis of this measure, if enabled, provides details such as SpinlocksID, Ownerpid, Lastownerpid, Spid, login name, Status, etc.</p>
Grabs rate	Indicates the number of grabs for this spinlock per second.	Grabs/Sec	
Spins rate	Indicates the number of CPU spins that are made per second to acquire this spinlock.	Spins/Sec	Ideally, the value of this measure should be low. A significance increase in the value indicates high CPU utilization, which results high

Measurement	Description	Measurement Unit	Interpretation
			performance lag.
Waits rate	Indicates the number of waits that are occurred per second for this spinlock.	Waits/Sec	If the value of this measure is consistently high, identify which resource causing waits and fine tune the appropriate SQL queries.

5.3 Sybase Cache Layer

Use the tests associated with this layer to measure the effectiveness of your caches, check for sizing inadequacies, and take relevant optimization steps.

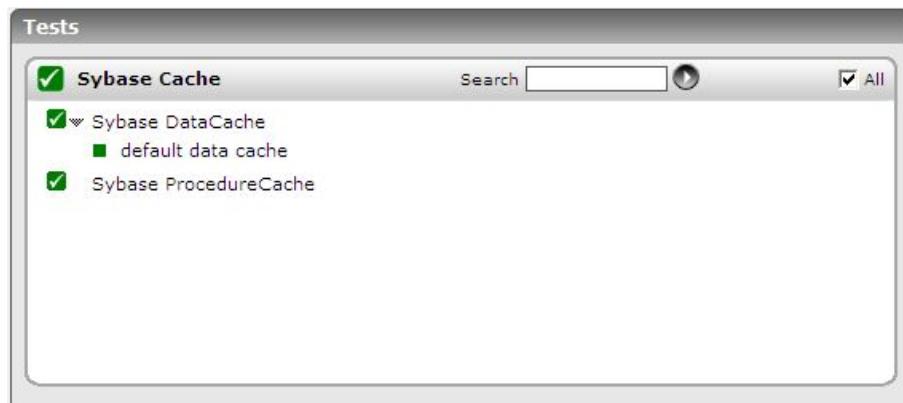


Figure 5.6: The tests associated with the Sybase Cache layer

5.3.1 Sybase Data Cache Test

Data caches in ASE hold the data, index, and log pages currently in use, as well as recently used pages in memory. These caches are critical in providing high levels of system performance as they effectively avoid expensive disk I/O. Inadequately sized data caches can increase the incidence of physical disk accesses, thereby affecting the performance of the Sybase server. Periodic monitoring of the usage of the data cache is essential to determine whether the cache needs to be resized or not.

This test auto-discovers the data caches on the Sybase server, and tracks the usage of each cache. Frequently used objects and objects that occupy the memory are listed in detailed diagnosis. For this test to work, make sure that the enable monitoring parameter is enabled.

Target of the test : A Sybase ASE server on which the MDA tables have been installed

Agent deploying the test : An internal agent

Outputs of the test : One set of results for every database being monitored

Configurable parameters for the test

Parameter	Description
Test Period	How often should the test be executed.
Host	Refers to the IP address of the Sybase ASE server.
Port	The port number at which the Sybase server listens to.
User	To enable this test to connect to the Sybase server and collect the required metrics, it is enough if you configure the test with the name of a Sybase user who has the “mon_role”. However, for best results, it is recommended that you configure all Sybase tests with the credentials of a Sybase user who has the “mon_role”, “sa_role”, and “sybase_ts_role”.
Password	The password corresponding to the above user
Confirm Password	Confirm the password by retyping it here.
Detailed Diagnosis	<p>To make diagnosis more efficient and accurate, the eG Enterprise suite embeds an optional detailed diagnostic capability. With this capability, the eG agents can be configured to run detailed, more elaborate tests as and when specific problems are detected. To enable the detailed diagnosis capability of this test for a particular server, choose the On option. To disable the capability, click on the Off option.</p> <p>The option to selectively enable/disable the detailed diagnosis capability will be available only if the following conditions are fulfilled:</p> <ul style="list-style-type: none"> • The eG manager license should allow the detailed diagnosis capability • Both the normal and abnormal frequencies configured for the detailed diagnosis measures should not be 0.

Measurements made by the test

Measurement	Description	Measurement Unit	Interpretation
Data cache hit ratio	The hit ratio of each data cache in the Sybase server.	Pct	If the value of this measure is low, it indicates that too many physical reads are occurring on the Sybase server. If the problem persists, it could result in a serious contention for disk resources, which in turn, can cause

Measurement	Description	Measurement Unit	Interpretation
			<p>the performance of the Sybase server to significantly deteriorate. You might want to consider resizing the data cache to avoid this adversity.</p> <p>The detailed diagnosis for this measure provides a list of objects that occupy the memory in cache, so that we can easily identify the objects that are consuming too much memory, and accordingly initiate corrective actions.</p>
Number of objects	The number of objects in each cache.	Number	Use the detailed diagnosis of this measure to view the list of objects in cache; this reveals the objects that are frequently accessed by users.

The detailed diagnosis of the *Data cache hit ratio* measure reveals the objects that are in cache and the memory space occupied by each object. This way, you can quickly identify which objects are occupying the maximum space in the cache, check whether these objects are been used frequently, and if not, remove the objects from the cache, so as to free space.

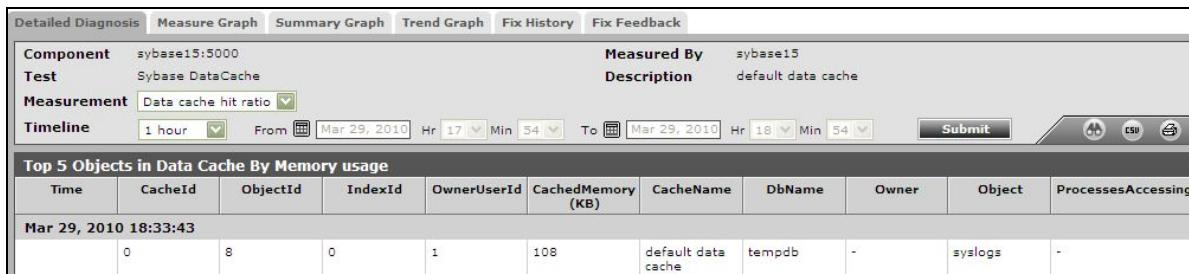


Figure 5.7: The detailed diagnosis of the Data cache hit ratio

5.3.2 Sybase Procedure Cache Test

Adaptive Server maintains an MRU/LRU (most recently used/least recently used) chain of stored procedure query plans. As users execute stored procedures, Adaptive Server looks in the procedure cache for a query plan to use. If a query plan is available, it is placed on the MRU end of the chain, and execution begins. If no plan is in memory, or if all copies are in use, the query tree for the procedure is read from the sysprocedures table. It is then optimized, using the parameters provided

to the procedure, and put on the MRU end of the chain, and execution begins. Plans at the LRU end of the page chain that are not in use are aged out of the cache.

The memory allocated for the procedure cache holds the optimized query plans (and occasionally trees) for all batches, including any triggers. If adequate memory is not available to the cache, then cache misses will increase, thereby causing direct accesses to database tables to rise; if this trend continues, then the performance of the database server will suffer.

By periodically monitoring the usage of the procedure cache, administrators can promptly detect insufficient memory allocations to the cache; based on the findings, they can resize the cache to ensure peak performance of the database server.

This test reports whether/not the procedure cache has been utilized optimally. For execution, the test requires the enable monitoring configuration parameter to be enabled.

Target of the test : A Sybase ASE server on which the MDA tables have been installed

Agent deploying the test : An internal agent

Outputs of the test : One set of results for every Sybase ASE server being monitored.

Configurable parameters for the test

Parameter	Description
Test Period	How often should the test be executed.
Host	Refers to the IP address of the Sybase ASE server.
Port	The port number at which the Sybase server listens to.
User	To enable this test to connect to the Sybase server and collect the required metrics, it is enough if you configure the test with the name of a Sybase user who has the “mon_role”. However, for best results, it is recommended that you configure all Sybase tests with the credentials of a Sybase user who has the “mon_role”, “sa_role”, and “sybase_ts_role”.
Password	The password corresponding to the above user
Confirm Password	Confirm the password by retying it here.
Detailed Diagnosis	To make diagnosis more efficient and accurate, the eG Enterprise suite embeds an optional detailed diagnostic capability. With this capability, the eG agents can be configured to run detailed, more elaborate tests as and when specific problems are detected. To enable the detailed diagnosis capability of this test for a particular server, choose the On option. To disable the capability, click on the Off option.

Parameter	Description
	<p>The option to selectively enable/disable the detailed diagnosis capability will be available only if the following conditions are fulfilled:</p> <ul style="list-style-type: none"> • The eG manager license should allow the detailed diagnosis capability • Both the normal and abnormal frequencies configured for the detailed diagnosis measures should not be 0.

Measurements made by the test

Measurement	Description	Measurement Unit	Interpretation
Procedure hit ratio	The percentage of time a stored procedure query plan required by a user was available in the procedure cache.	Percent	<p>Ideally, the value of this measure should be high. A low value indicates that many stored procedure query plan that users required were, more often than not, unavailable in the procedure cache. To ensure that accesses to physical database tables do not increase as a result, check the most accessed procedure and place it in named cache.</p> <p>A low cache hit rate could also indicate a badly sized cache. Use the detailed diagnosis of this test to view the top-5 procedures in the cache in terms of memory usage.</p> <p>If need be, you can resize the cache using the following formula:</p> $\text{max } \# \text{ of concurrent users } * (4 + \text{size of largest plan}) * 1.25$

5.4 Sybase Server Layer

The tests mapped to this layer enable administrators to do the following:

- Detect I/O processing bottlenecks on the Sybase server;
- Ascertain how CPU-efficient the Sybase engine is;

- Monitor the traffic to and from the server so that, network slowdowns can be promptly isolated;
- Monitor the type and count of processes on the Sybase server so that, resource-intensive processes can be identified.



Figure 5.8: The tests mapped to the Sybase Server layer

5.4.1 Sybase Device I/O Test

This test monitors the I/O activity on each device on the Sybase server, and proactively alerts administrators to contention for device I/O semaphores. To ensure that this test runs smoothly, enable the enable monitoring configuration parameter on the Sybase server.

Target of the test : A Sybase ASE server on which the MDA tables have been installed

Agent deploying the test : An internal agent

Outputs of the test : One set of results for every Sybase ASE server being monitored.

Configurable parameters for the test

Parameter	Description
Test Period	How often should the test be executed.
Host	Refers to the IP address of the Sybase server.
Port	The port number at which the Sybase server listens to.
User	A Sybase user who has the "sa_role".
Password	The password corresponding to the above user.
Confirm Password	Confirm the password by retyping it here.

Measurements made by the test

Measurement	Description	Measurement Unit	Interpretation
Reads	The number of reads that occurred on the device during the last measurement period.	Number	
APF reads	Indicates the number of APF reads that occurred on this device during the last measurement period.	Number	<p>Asynchronous prefetch (APF) issues I/O requests for pages before the query needs them so that most pages are in cache by the time query processing needs to access the page. High APF activity can hence improve performance for:</p> <ul style="list-style-type: none"> • Sequential scans, such as table scans, clustered index scans, and covered nonclustered index scans • Access via nonclustered indexes • Some dbcc checks and update statistics • Recovery
Writes	Indicates the number of writes that occurred on this device during the last measurement period.	Number	
Request	The number of requests from this device during the last measurement period.	Number	
IO waits	The number of I/O requests to this device that were waiting during the last measurement period.	Number	
Total io time	The time taken to read from or write to this device during the last	Msecs	A high value of this measure indicates that the device is taking too much time to process I/O requests. This could be

Measurement	Description	Measurement Unit	Interpretation
	measurement period.		<p>owing to any of the following reasons:</p> <ul style="list-style-type: none"> • An I/O overload on the device; • Disk fragmentation on the device; • Table fragmentation
Percentage io granted	The percentage of IO granted.	Percent	<p>Ideally, this value should be high. When Adaptive Server needs to perform a disk I/O, it gives the task to the semaphore for that device in order to acquire a block I/O structure. On SMP systems, multiple engines can try to post I/Os to the same device simultaneously. This creates contention for that semaphore, especially if there are hot devices or if the data is not well distributed across devices.</p> <p>A low value for this measure indicates that many I/O requests were waiting for the semaphore – in other words, it indicates a contention for the semaphore. One solution might be to redistribute the data on the physical devices.</p>

5.4.2 Sybase Engine Test

This test measures the efficiency of the Sybase engines by monitoring the CPU usage of each engine. You will have to enable the enable monitoring configuration parameter to make this test work.

Target of the test : A Sybase ASE server on which the MDA tables have been installed

Agent deploying the test : An internal agent

Outputs of the test : One set of results for every Sybase ASE engine being monitored.

Configurable parameters for the test

Parameter	Description
Test Period	How often should the test be executed.
Host	Refers to the IP address of the Sybase ASE server.
Port	The port number at which the Sybase server listens to.
User	To enable this test to connect to the Sybase server and collect the required metrics, it is enough if you configure the test with the name of a Sybase user who has the “mon_role”. However, for best results, it is recommended that you configure all Sybase tests with the credentials of a Sybase user who has the “mon_role”, “sa_role”, and “sybase_ts_role”.
Password	The password corresponding to the above user
Confirm Password	Confirm the password by retyping it here.

Measurements made by the test

Measurement	Description	Measurement Unit	Interpretation
Percentage CPU busy	The percentage of CPU used by this engine during the last measurement period, for processing queries.	Percent	A high value for this measure indicates excessive utilization of CPU. The CPU utilization may be high because a few queries are consuming a lot of CPU, or because there are too many queries contending for a limited resource. Check the currently running queries to see the exact cause of the problem. If one/more queries appear to be resource-intensive, you might have to fine-tune them to make them resource efficient.
Percentage system busy	The percentage of CPU used by this engine during the last measurement period, for system-level processing.	Percent	An unusually high value indicates a problem and may be due to too many system-level tasks executing simultaneously.
Percentage user	The percentage of CPU	Percent	A high value for this measure indicates

Measurement	Description	Measurement Unit	Interpretation
busy	used by this engine during the last measurement period, for processing user requests.		that one/more user transactions are consuming too much CPU. You can take the help of the detailed diagnosis information provided by the Avg CPU time measure reported by the Sybase Statement test to identify the user queries that are consuming CPU resources excessively. Once identified, you might have to fine-tune the application that initiated the query.
Percentage idle	The percentage of time for which the CPU was idle during the last measurement period.	Percent	

5.4.3 Sybase Network I/O Test

This test tracks the incoming and outgoing network traffic on the Sybase server. For execution, this test requires the enable monitoring configuration parameter to be enabled.

Target of the test : A Sybase ASE server on which the MDA tables have been installed

Agent deploying the test : An internal agent

Outputs of the test : One set of results for every Sybase ASE server being monitored.

Configurable parameters for the test

Parameter	Description
Test Period	How often should the test be executed.
Host	Refers to the IP address of the Sybase ASE server.
Port	The port number at which the Sybase server listens to.
User	To enable this test to connect to the Sybase server and collect the required metrics, it is enough if you configure the test with the name of a Sybase user who has the “mon_role”. However, for best results, it is recommended that you configure all Sybase tests with the credentials of a Sybase user who has the “mon_role”, “sa_role”, and “sybase_ts_role”.

Parameter	Description
Password	The password corresponding to the above user
Confirm Password	Confirm the password by retying it here.
Detailed Diagnosis	<p>To make diagnosis more efficient and accurate, the eG Enterprise suite embeds an optional detailed diagnostic capability. With this capability, the eG agents can be configured to run detailed, more elaborate tests as and when specific problems are detected. To enable the detailed diagnosis capability of this test for a particular server, choose the On option. To disable the capability, click on the Off option.</p> <p>The option to selectively enable/disable the detailed diagnosis capability will be available only if the following conditions are fulfilled:</p> <ul style="list-style-type: none"> • The eG manager license should allow the detailed diagnosis capability • Both the normal and abnormal frequencies configured for the detailed diagnosis measures should not be 0.

Measurements made by the test

Measurement	Description	Measurement Unit	Interpretation
Total traffic	The total number of IO packets handled by the server per second.	Packets/sec	
Packets send rate	The number of packets sent from the Sybase Server per second.	Packets/sec	
Packets received rate	The number of packets received by the Sybase server per second.	Packets/sec	
Data sent	The number of bytes sent by the Sybase server per second.	KB/Sec	
Data received	The number of bytes received by the Sybase server per second.	Bytes/Sec	

5.4.4 Sybase System Processes Test

This test reports details about the system processes running in a Sybase database server.

Target of the test : A Sybase ASE server on which the MDA tables have been installed

Agent deploying the test : An internal agent

Outputs of the test : One set of results for every user being monitored.

Configurable parameters for the test

Parameter	Description
Test Period	How often should the test be executed.
Host	Refers to the IP address of the Sybase ASE server.
Port	The port number at which the server listens to.
User	To enable this test to connect to the Sybase server and collect the required metrics, it is enough if you configure the test with the name of a Sybase user who has the “mon_role”. However, for best results, it is recommended that you configure all Sybase tests with the credentials of a Sybase user who has the “mon_role”, “sa_role”, and “sybase_ts_role”.
Password	The password corresponding to the above user.
Confirm Password	Confirm the password by retyping it here.
Detailed Diagnosis	<p>To make diagnosis more efficient and accurate, the eG Enterprise suite embeds an optional detailed diagnostic capability. With this capability, the eG agents can be configured to run detailed, more elaborate tests as and when specific problems are detected. To enable the detailed diagnosis capability of this test for a particular server, choose the On option. To disable the capability, click on the Off option.</p> <p>The option to selectively enable/disable the detailed diagnosis capability will be available only if the following conditions are fulfilled:</p> <ul style="list-style-type: none"> • The eG manager license should allow the detailed diagnosis capability • Both the normal and abnormal frequencies configured for the detailed diagnosis measures should not be 0.

Measurements made by the test

Measurement	Description	Measurement Unit	Interpretation
Sybase processes	The total number of Sybase processes	Number	
Background processes	The total number of background processes run by the Adaptive Server rather than by a user process	Number	The detailed diagnosis of this measure, if enabled, provides the details pertaining to the background processes currently executing.
Running processes	The total number of running processes	Number	The detailed diagnosis of this measure, if enabled, provides details such as the ID of the running processes, the user executing each of the processes, the database on which every process is executing etc.
Sleeping processes	The total number of sleeping processes	Number	The detailed diagnosis of this measure, if enabled, provides details such as the ID of the sleeping processes, the user executing each of the processes, the database on which every process is executing, the sleep status, sleep time etc.
Infected processes	The total number of processes in which the server has detected a serious error condition	Number	The detailed diagnosis of this measure, if enabled, provides the ID of the infected processes, the user executing each of the processes, and the database on which every process is executing. This information enables the user to isolate the specific queries that are infected. Further analysis of these queries can be performed, in order to figure out the reason for the infection and take adequate measures to prevent it from recurring.
Blocked processes	If a process attempts to access a resource that is already in use by another process, then such a	Number	The detailed diagnosis of this measure, if enabled, reveals information such as the ID of the blocked processes, the user executing

Measurement	Description	Measurement Unit	Interpretation
	process will be blocked until such time that the other process releases the resource. This measure indicates the total number of blocked processes.		each of the processes, the database on which every process is executing, the waiting time of the blocked process, the command that initiated the block, etc.
Remote processes	Indicates the number of processes that are processing I/O with a remote server.	Number	The detailed diagnosis of this measure, if enabled, reveals information such as the ID of the remote processes, the user executing each of the processes, the database on which every process is executing, resource usage per process, etc.
Stopped processes	Indicates the number of processes that have stopped executing.	Number	The detailed diagnosis of this measure, if enabled, reveals information such as the ID of the stopped processes, the user executing each of the processes, the database on which every process is executing, resource usage per process, etc.

The detailed diagnosis of the Blocked processes measure not only reveals the IP of the process that has been blocked, but also provides useful information indicating the resource usage of each blocked process, along with the last query that was executed by the blocked process.

Time	Spid	Status	User	DB	Hostname	Program name	Spid (blocking)	Time blocked	CPU(ticks)	Physical io	Mem usage	Command
Aug 22, 2011 14:40:32	25	lock sleep	sa	master	HPNEW	jTDS	27	12688	0	0	5	create proc jtds00001 as SELECT * FROM emp_details

Figure 5.9: Detailed diagnosis of the Blocked processes reported by the SybaseSysProcesses test

For performing additional diagnostics on the blocked process, click on the **Sys Processes** icon (grid icon) in Figure 5.9. Figure 5.10 will then appear, listing the **Process ID** of each blocked process. By default, the **Process ID** will be sorted in the ascending order of the ID itself; to change the sort order, pick a different option from the **Sort By** list. The **Process IDs** will then be listed in the chosen

sort order. Selecting a **Process ID** from the list will reveal the following in the right panel of Figure 5.10: the current status of the chosen process, the database on which the process is executing, the duration for which it was blocked, and the CPU, I/O, and memory resources that were consumed by the process. In addition, the **LastCommand** executed by the process will also be displayed.

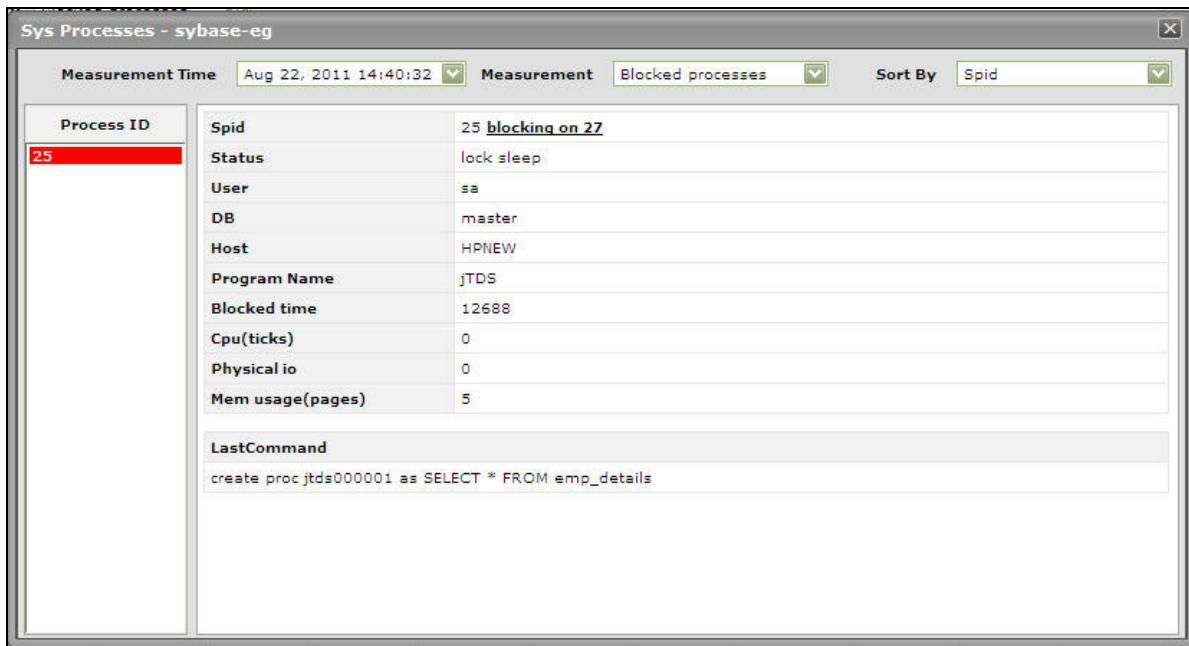


Figure 5.10: Analyzing blocked processes

Moreover, the **Spid** of the blocked process, as displayed in Figure 5.10, will be accompanied by a link to the ID of the process that is blocking it. Clicking on this link will reveal the complete details of the blocking process (see Figure 5.11), including the command executed by that process.

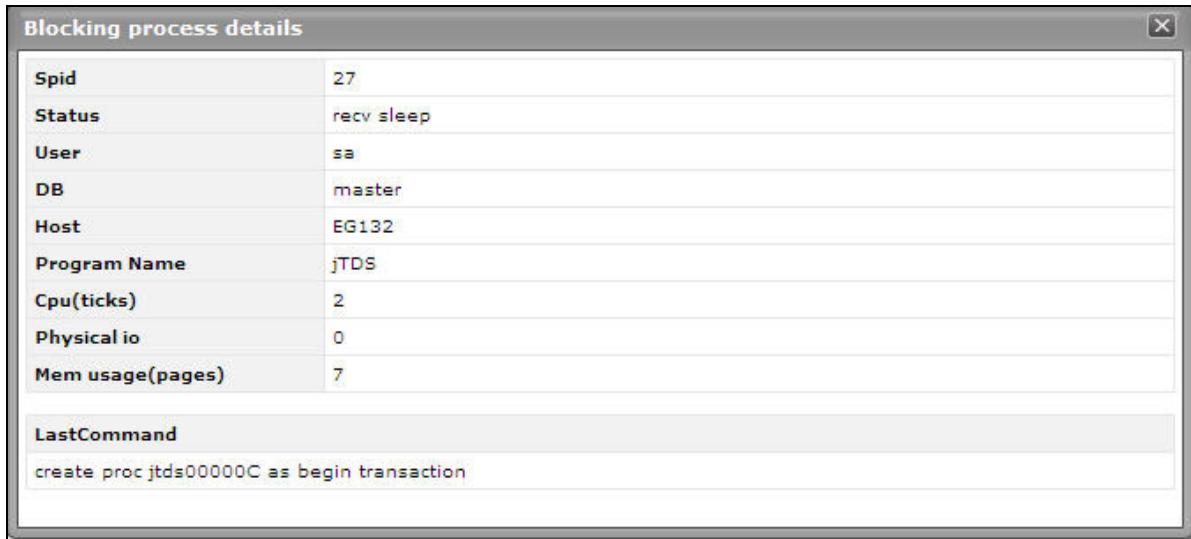


Figure 5.11: Details of the blocking process

By analyzing the query of the blocking process, you can determine whether deficiencies in query formulation caused this process to block the other process; if so, you can fine-tune the query to remove the block.

View the complete details of running processes by using the detailed diagnosis of the Running processes measure. Besides the process ID and the user who initiated the process, the detailed diagnosis will also reveal the resource usage (CPU, IO, Physical memory) of each process, thus bringing resource-intensive processes to your attention. The last command executed by the process will also be revealed. For further diagnosis, use the **Sys Processes** icon (☰) in Figure 5.13.

The screenshot shows a report titled 'Details of running processes' with the following data:

Time	Spid	Status	User	DB	Hostname	Program name	CPU(ticks)	Physical io	Mem usage	Command
Aug 22, 2011 14:38:41	Sys Processes	running	sa	master	eg132	-	0	0	11	dbcc sqltext (32)
Aug 22, 2011 14:36:40	Sys Processes	running	sa	master	eg132	-	0	0	11	dbcc sqltext (22)

Figure 5.12: The detailed diagnosis of the Running processes measure reported by the SybaseSysProcesses test

To view the complete details of sleeping processes, use the detailed diagnosis of the Sleeping processes measure. In addition to process ID and user name, the detailed diagnosis also reveals the

last command that was executed by the sleeping process, thereby pointing you to queries that may require optimization. For further diagnosis, use the **Sys Processes** icon (☰) in Figure 5.13.

Time	Spid	Status	User	DB	Hostname	Program name	CPU(ticks)	Physical io	Mem usage	Command
Aug 22, 2011 14:38:41	17	recv sleep	sa	master	HPNEW	jTDS	0	0	2	SELECT name AS TABLE_SCHEMA, NULL AS TABLE_CATALOG FROM dbo.sysusers WHERE uid>0 ORDER BY TABLE_SCHEMA

Figure 5.13: The detailed diagnosis of the Sleeping processes measure reported by the SybaseSysProcesses test

For viewing detailed metrics related to remote processes, use the detailed diagnosis of the Remote processes measure. In addition to process ID and user name, the detailed diagnosis also reveals the last command that was executed by the remote process, thus revealing the nature of interactions between Sybase and the remote server. For further diagnosis, click on the (☰) icon in Figure 5.14.

Time	Spid	Status	User	DB	Hostname	Program name	CPU(ticks)	Physical io	Mem usage	Command
Aug 22, 2011 12:54:20	31	remote i/o	sa	master	eg132	-	0	0	6	Select DeadlockID,VictimKPID, ResolveTime, ObjectDBID, ObjectName, RowNumber, HeldSPID, HeldKPID, HeldUserName, HeldCommand, HeldLockType, HeldSPID, WaitKPID, WaitUserName, WaitTime, WaitTimeMillSec, WaitLockType From monDeadLock

Figure 5.14: The detailed diagnosis of the Remote processes measure reported by the SybaseSysProcesses test

5.5 Sybase Databases Layer

This layer monitors each of the databases on the Sybase server. Using the tests mapped to this layer, you can promptly identify the following:

- Which database is consuming memory excessively?
- The transaction log on which database has run out of space?
- Which database is left with very little free space?

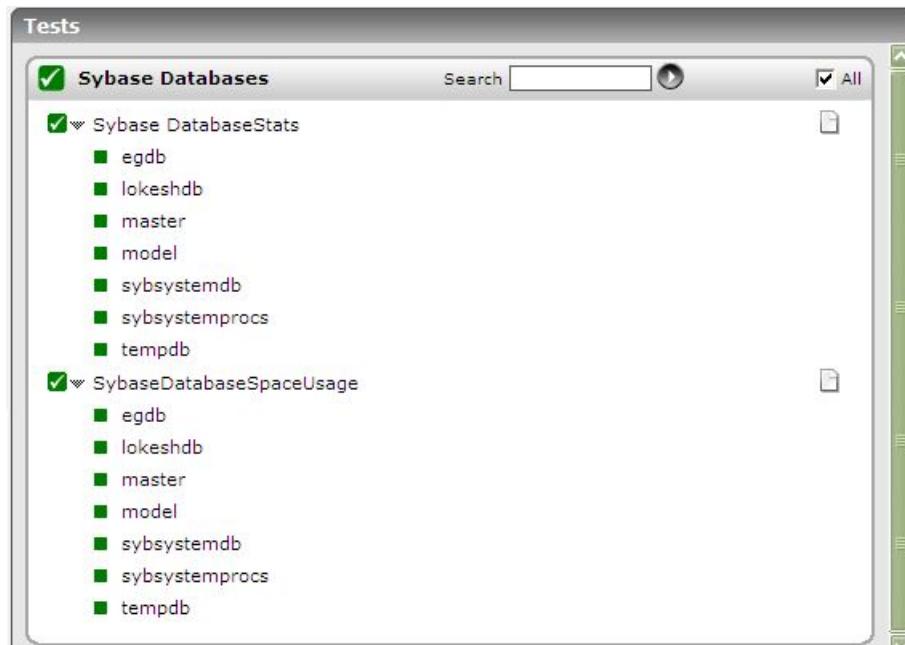


Figure 5.15: The tests mapped to the Sybase Databases layer

5.5.1 Sybase DatabaseStats Test

This test is used to track the memory usage, backup state, transaction log space requests, and wait statistics of each database. For this test to work, make sure that the enable monitoring parameter is enabled.

Target of the test : A Sybase ASE server on which the MDA tables have been installed

Agent deploying the test : An internal agent

Outputs of the test : One set of results for every Sybase ASE server being monitored.

Configurable parameters for the test

Parameter	Description
Test Period	How often should the test be executed.
Host	Refers to the IP address of the Sybase ASE server.

Parameter	Description
Port	The port number at which the Sybase server listens to.
User	To enable this test to connect to the Sybase server and collect the required metrics, it is enough if you configure the test with the name of a Sybase user who has the “mon_role”. However, for best results, it is recommended that you configure all Sybase tests with the credentials of a Sybase user who has the “mon_role”, “sa_role”, and “sybase_ts_role”.
Password	The password corresponding to the above user
Confirm Password	Confirm the password by retying it here.
Detailed Diagnosis	<p>To make diagnosis more efficient and accurate, the eG Enterprise suite embeds an optional detailed diagnostic capability. With this capability, the eG agents can be configured to run detailed, more elaborate tests as and when specific problems are detected. To enable the detailed diagnosis capability of this test for a particular server, choose the On option. To disable the capability, click on the Off option.</p> <p>The option to selectively enable/disable the detailed diagnosis capability will be available only if the following conditions are fulfilled:</p> <ul style="list-style-type: none"> • The eG manager license should allow the detailed diagnosis capability • Both the normal and abnormal frequencies configured for the detailed diagnosis measures should not be 0.

Measurements made by the test

Measurement	Description	Measurement Unit	Interpretation
Used memory	The memory currently used by each database	MB	<p>Ideally, the value of this measure should be low.</p> <p>In the event of a sudden slowdown in the performance of the Sybase server, you might want to compare the memory usage of all databases on the server to identify which database is excessively consuming memory resources.</p>
Last backup state	Whether the last backup succeeded or failed.	Number	If the value of this measurement is ‘1’, then it indicates that the last backup

Measurement	Description	Measurement Unit	Interpretation
			<p>you attempted or scheduled failed. You would then have to investigate the reasons for the failure and rectify them.</p> <p>If the last backup was successful, then this measure will return the value '0'.</p>
Transaction log state	The current status of transaction log gets.	Number	If this measurement is '1', it implies that the transaction log of that database has run out of space. When this occurs, you would have to allocate more space for that transaction log file; if not, database performance will suffer.
Append log request	The number of times the Sybase server placed a request for log space for that database.	Number	
Append log waits	The current number of log requests waiting to be processed.	Number	If most of the Append log requests are in waiting – i.e., if the value of this measure is dangerously close to that of the Append log requests measure- it could indicate a processing bottleneck on the server; this is typically caused by insufficient space in the transaction logs. In such a situation, it would be best to allocate more space to the transaction log, so that the request queue length reduces.

5.5.2 Sybase Database Space Usage Test

This test reports the space usage of all Sybase databases, and sheds light on those databases that are running short of space.

Target of the test : A Sybase ASE server on which the MDA tables have been installed

Agent deploying the test : An internal agent

Outputs of the test : One set of results for every Sybase ASE server being monitored.

Configurable parameters for the test

Parameter	Description
Test Period	How often should the test be executed.
Host	Refers to the IP address of the Sybase ASE server.
Port	The port number at which the Sybase server listens to.
User	To enable this test to connect to the Sybase server and collect the required metrics, it is enough if you configure the test with the name of a Sybase user who has the “mon_role”. However, for best results, it is recommended that you configure all Sybase tests with the credentials of a Sybase user who has the “mon_role”, “sa_role”, and “sybase_ts_role”.
Password	The password corresponding to the above user.
Confirm Password	Confirm the password by retyping it here.
Include DB	Specify a comma-separated list of databases that you wish to monitor in the Include DB text box. By default, this is set to <i>all</i> .
Exclude DB	Specify a comma-separated list of databases that you wish to exclude from the scope of monitoring in the Exclude DB text box. By default, this is set to <i>none</i> .
Use Stored Procedure	By default, this flag is set to Yes , indicating that the test uses a stored procedure for collecting space usage metrics. To use this stored procedure, the eG agent requires <i>sa_role</i> privileges. In high security environments, where administrators may not prefer to expose the credential of a user with <i>sa_role</i> privileges to the eG agent, you can configure the eG agent to run a query instead for pulling the required metrics. To enable the eG agent to use this query, set the Use Stored Procedure flag to No .

Measurements made by the test

Measurement	Description	Measurement Unit	Interpretation
Total size	The space allocated to a database.	MB	
Reserved space percent	The percentage of space reserved for tables and indexes of a database.	Percent	If the value of this measure reaches 100%, it indicates that the total space in the database has been completely allocated. New tables/indexes can be

Measurement	Description	Measurement Unit	Interpretation
			added to the database, only if its total size is increased.
Reserved space	The amount of space allocated to the tables and indexes created on a database.	MB	If the value of this measure becomes equal to that of the <i>Total size</i> measure, new tables/indexes can no longer be created on the database. To create new tables, you must increase the database size.
Data space	The amount of space used by data.	MB	
Index space	The amount of space used by indexes.	MB	
Unused space	The amount of free space available in the database.	MB	

5.6 Sybase Service Layer

The tests mapped to this layer proactively alert administrators to the following:

- Non-availability of the Sybase server;
- Poor responsiveness of the Sybase server;
- Queries that have been running too long a time;
- Resource-intensive transactions to a database on the Sybase server;
- Infected processes and sleeping processes initiated by users to the Sybase server.

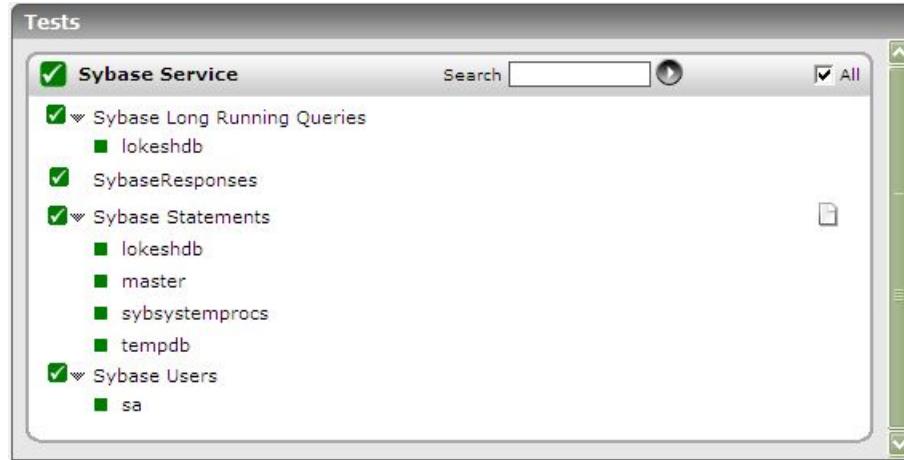


Figure 5.16: The tests mapped to the Sybase Service Layer

5.6.1 Sybase Long Running Queries Test

This test tracks the currently executing queries on the Sybase database server and determines the number of queries that have been running for a long time. For execution, this test requires the enable monitoring, statement statistics active, and per object statistics active configuration parameters to be enabled.

Target of the test : A Sybase ASE server on which MDA tables have been installed

Agent deploying the test : An internal agent

Outputs of the test : One set of results for the Sybase ASE server being monitored.

Configurable parameters for the test

Parameter	Description
Test Period	How often should the test be executed.
Host	Refers to the IP address of the Sybase ASE server.
Port	The port number at which the Sybase server listens to.
User	To enable this test to connect to the Sybase server and collect the required metrics, it is enough if you configure the test with the name of a Sybase user who has the "mon_role". However, for best results, it is recommended that you configure all Sybase tests with the credentials of a Sybase user who has the "mon_role", "sa_role", and "sybase_ts_role".
Password	The password corresponding to the above user

Parameter	Description
Confirm Password	Confirm the password by retyping it here.
Elapsed Time	In this text box, specify the duration (in seconds) for which a query should have executed for it to be regarded as a long running query. The default value is 5.
DDRowCount	Specify the number of long running queries for which details will be available in the detailed diagnosis page. By default, this parameter is set to 5. This indicates that even if the total number of long running queries is, say 10, the detailed diagnosis of this test will provide information pertaining to only 5 queries by default. For information related to more number of queries, you should increase the DDRowCount.
Detailed Diagnosis	<p>To make diagnosis more efficient and accurate, the eG Enterprise suite embeds an optional detailed diagnostic capability. With this capability, the eG agents can be configured to run detailed, more elaborate tests as and when specific problems are detected. To enable the detailed diagnosis capability of this test for a particular server, choose the On option. To disable the capability, click on the Off option.</p> <p>The option to selectively enable/disable the detailed diagnosis capability will be available only if the following conditions are fulfilled:</p> <ul style="list-style-type: none"> • The eG manager license should allow the detailed diagnosis capability • Both the normal and abnormal frequencies configured for the detailed diagnosis measures should not be 0.

Measurements made by the test

Measurement	Description	Measurement Unit	Interpretation
Number of queries	Indicates the number of queries currently executing on the database server that have been running for more time than the configured Elapsed Time.	Number	The detailed diagnosis for this measure indicates the exact queries and which user is executing the queries. This information can be very useful in identifying queries that may be candidates for optimization.
Avg elapsed time	The average time taken by the long running queries to execute.	Seconds	

5.6.2 Sybase Users Test

This test monitors user sessions to the database server, and reports the number and status of processes executed by each user on the server.

Target of the test : A Sybase ASE server on which the MDA tables have been installed

Agent deploying the test : An internal agent

Outputs of the test : One set of results for every user being monitored.

Configurable parameters for the test

Parameter	Description
Test Period	How often should the test be executed.
Host	Refers to the IP address of the Sybase ASE server.
Port	The port number at which the Sybase server listens to.
User	To enable this test to connect to the Sybase server and collect the required metrics, it is enough if you configure the test with the name of a Sybase user who has the “mon_role”. However, for best results, it is recommended that you configure all Sybase tests with the credentials of a Sybase user who has the “mon_role”, “sa_role”, and “sybase_ts_role”.
Password	The password corresponding to the above user
Confirm Password	Confirm the password by retyping it here.
Exclude User	Specify a comma-separated list of user names to be exclude from the monitoring scope of this test in the Exclude User text box.
Detailed Diagnosis	<p>To make diagnosis more efficient and accurate, the eG Enterprise suite embeds an optional detailed diagnostic capability. With this capability, the eG agents can be configured to run detailed, more elaborate tests as and when specific problems are detected. To enable the detailed diagnosis capability of this test for a particular server, choose the On option. To disable the capability, click on the Off option.</p> <p>The option to selectively enable/disable the detailed diagnosis capability will be available only if the following conditions are fulfilled:</p> <ul style="list-style-type: none"> • The eG manager license should allow the detailed diagnosis capability • Both the normal and abnormal frequencies configured for the detailed diagnosis measures should not be 0.

Measurements made by the test

Measurement	Description	Measurement Unit	Interpretation
Total processes	The number of processes initiated by this user on the database server, each username.	Number	
Running processes	The number of processes currently running for this user in the database.	Number	Use the detailed diagnosis of this measure to view the details of the running processes.
Sleeping processes	The number of processes initiated by this user that are currently sleeping.	Number	If the value of this measure is very high, it could indicate a memory leak in the application. The administrator should take care to avoid sleeping processes. Use the detailed diagnosis of this measure to view the details of sleeping processes.
Infected processes	The number of processes initiated by this user that are currently infected.	Number	If the value of this measure is very close to that of the Total processes measure, then further investigation would be required to control the infected processes. Use the detailed diagnosis of this measure to identify these processes and take the necessary corrective action.

Using the detailed diagnosis of the Running processes measure, you can find out which processes are currently running for a particular user.

Time	LoginName	StatusCount	Status	ProgramName	HostName
Mar 29, 2010 18:59:42	sa	1	running	-	-

Figure 5.17: The detailed diagnosis of the Running processes measure reported by the Sybase Users test

Using the detailed diagnosis of the Sleeping processes measure, you can find out which processes initiated by a particular user are currently sleeping.



Figure 5.18: The detailed diagnosis of the Sleeping processes measure reported by the Sybase Users test

5.6.3 Sybase Responses Test

This test, executed by an internal agent, tracks the statistics pertaining to the availability and response time of the Sybase adaptive server.

Target of the test : A Sybase ASE server on which the MDA tables have been installed

Agent deploying the test : An internal agent

Outputs of the test : One set of results for every Sybase ASE server being monitored.

Configurable parameters for the test

Parameter	Description
Test Period	How often should the test be executed.
Host	Refers to the IP address of the Sybase ASE server.
Port	The port number at which the Sybase server listens to.
User	To enable this test to connect to the Sybase server and collect the required metrics, it is enough if you configure the test with the name of a Sybase user who has the “mon_role”. However, for best results, it is recommended that you configure all Sybase tests with the credentials of a Sybase user who has the “mon_role”, “sa_role”, and “sybase_ts_role”.
Password	The password corresponding to the above user
Confirm Password	Confirm the password by retyping it here.
Query	By default, this parameter is set to select * from sysobjects. The test executes this executes the default query to report the availability and responsiveness of

Parameter	Description
the server. If the user configured for this test does not have the right to execute the default query, then the Query parameter can be overridden with a query that user has permission to execute.	

Measurements made by the test

Measurement	Description	Measurement Unit	Interpretation
Sybase server availability	Indicates if the database instance is responding to requests or not.	Percent	<p>A value of 100 for this measure indicates that the database is responding to a request. On the other hand, a value of 0 denotes that the database is not responding.</p> <p>Availability problems may be caused by a misconfiguration/malfunctioning of the database instance, or because the instance is using an invalid user account.</p> <p>Besides the above, this measure will report that the server is unavailable even if a connection to the database instance is unavailable, or if a query to the database fails. In this case, you can check the values of the DB connection availability and Query processor availability measures to know what is exactly causing the database instance to not respond to requests - is it owing to a connection unavailability? or is it due to a query failure?</p>
Total response time	Indicates the time taken by the database server to respond to a user query. This is the sum of connection time and query execution time.	Secs	A sudden increase in response time is indicative of a potential performance bottleneck on the database server.
DB connection availability	Indicates whether the database connection is available or not.	Percent	If this measure reports the value 100 , it indicates that the database connection is

Measurement	Description	Measurement Unit	Interpretation
			available. The value 0 on the other hand indicates that the database connection is unavailable. A connection to the database may be unavailable if the database is down or if the database is listening on a port other than the one configured for it in the eG manager or owing to a poor network link. If the Sybase server availability measure reports the value 0, then, you can check the value of this measure to determine whether/not it is due to the unavailability of a connection to the server.
Query processor availability	Indicates whether the database query is executed successfully or not.	Percent	If this measure reports the value 100, it indicates that the query executed successfully. The value 0 on the other hand indicates that the query failed. In the event that the Sybase server availability measure reports the value 0, check the value of this measure to figure out whether the failed query is the reason why that measure reported a server unavailability.
Query execution time	Indicates the time taken for query execution.	Secs	A high value could indicate that one/more queries to the database are taking too long to execute. Inefficient/badly designed queries to the database often run for long periods. If the value of this measure is higher than that of the Connection time measure, you can be rest assured that long running queries are the ones causing the responsiveness of the server to suffer.
Records fetched	Indicates the number of records fetched from the database.	Number	The value 0 indicates that no records are fetched from the database

About eG Innovations

eG Innovations provides intelligent performance management solutions that automate and dramatically accelerate the discovery, diagnosis, and resolution of IT performance issues in on-premises, cloud and hybrid environments. Where traditional monitoring tools often fail to provide insight into the performance drivers of business services and user experience, eG Innovations provides total performance visibility across every layer and every tier of the IT infrastructure that supports the business service chain. From desktops to applications, from servers to network and storage, from virtualization to cloud, eG Innovations helps companies proactively discover, instantly diagnose, and rapidly resolve even the most challenging performance and user experience issues.

eG Innovations is dedicated to helping businesses across the globe transform IT service delivery into a competitive advantage and a center for productivity, growth and profit. Many of the world's largest businesses use eG Enterprise to enhance IT service performance, increase operational efficiency, ensure IT effectiveness and deliver on the ROI promise of transformational IT investments across physical, virtual and cloud environments.

To learn more visit www.eginnovations.com.

Contact Us

For support queries, email support@eginnovations.com.

To contact eG Innovations sales team, email sales@eginnovations.com.

Copyright © 2020 eG Innovations Inc. All rights reserved.

This document may not be reproduced by any means nor modified, decompiled, disassembled, published or distributed, in whole or in part, or translated to any electronic medium or other means without the prior written consent of eG Innovations. eG Innovations makes no warranty of any kind with regard to the software and documentation, including, but not limited to, the implied warranties of merchantability and fitness for a particular purpose. The information contained in this document is subject to change without notice.

All right, title, and interest in and to the software and documentation are and shall remain the exclusive property of eG Innovations. All trademarks, marked and not marked, are the property of their respective owners. Specifications subject to change without notice.