



Monitoring eG Manager

eG Innovations Product Documentation

www.eginnovations.com

eG
Total Performance Visibility

Table of Contents

CHAPTER 1: INTRODUCTION	1
1.1 Pre-Requisites for Monitoring eG Manager	1
1.1.1 Securing the 'jmxremote.password' file	1
1.1.2 Enabling SNMP Support for the eG Manager's JRE	6
CHAPTER 2: MONITORING THE EG MANAGER	15
2.1 The JVM Layer	16
2.2 The eG Database Layer	17
2.2.1 eG Database Cleanup	18
2.2.2 eG Database Connections Test	25
2.2.3 eG Database Tables Test	28
2.2.4 eG Table Triggers Test	37
2.2.5 eG Datafile Details Test	38
2.3 The eG Application Layer	41
2.3.1 eG Infrastructure Test	42
2.3.2 eG EXEC Process Test	46
2.3.3 eG Helper Process Test	49
2.3.4 eG Agents Test	52
2.3.5 eG Manager Error Log Test	56
2.3.6 eG Object Pools Test	61
2.3.7 eG Servlets Test	62
2.3.8 State manager process	64
2.3.9 eG Threshold Log	66
2.3.10 Threshold manager process Test	71
2.3.11 eG Trend Log Test	78
2.3.12 Trend manager process Test	83
2.3.13 eG Cluster Test	88
2.4 The eG Access Layer	95
2.4.1 eG Registered Users Test	95
2.4.2 eG User Sessions Test	98
ABOUT EG INNOVATIONS	101

Table of Figures

Figure 1.1: Selecting the Properties option	2
Figure 1.2: The Properties dialog box	2
Figure 1.3: Deselecting the 'Use simple file sharing' option	3
Figure 1.4: Figure 1.4: Clicking the Advanced button	4
Figure 1.5: Verfying whether the Owner of the file is the same as the application Owner	4
Figure 1.6: Disinheriting permissions borrowed from a parent directory	5
Figure 1.7: Copying the inherited permissions	5
Figure 1.8: Granting full control to the file owner	6
Figure 1.9: The snmp.acl file	9
Figure 1.10: The snmp.acl file revealing the SNMP ACL example	10
Figure 1.11: Uncommenting the code block	10
Figure 1.12: The edited block	12
Figure 2.1: Layer model of the eG Manager	15
Figure 2.2: The tests mapped to the JVM layer	17
Figure 2.3: The tests mapped to the eG Database layer	18
Figure 2.4: The detailed diagnosis of the Total successfully cleaned tables measure	24
Figure 2.5: The detailed diagnosis of the Total backlogged tables measure	24
Figure 2.6: The detailed diagnosis of the Used connections measure	28
Figure 2.7: The detailed diagnosis of the Tables with highest volume of data measure	32
Figure 2.8: The detailed diagnosis of the Tables with lowest volume of data measure	33
Figure 2.9: The detailed diagnosis of the Tables with many rows measure	34
Figure 2.10: The detailed diagnosis of the Tables with few rows measure	35
Figure 2.11: The detailed diagnosis of the Tables without primary key measure	36
Figure 2.12: The detailed diagnosis of the Tables without index measure	36
Figure 2.13: The tests mapped to the eG Application layer	42
Figure 2.14: The detailed diagnosis of the Total managed components measure	45
Figure 2.15: The detailed diagnosis of the Total unmanaged components measure	45
Figure 2.16: The detailed diagnosis of the Total deleted components measure	45
Figure 2.17: The detailed diagnosis of the Recently managed components measure	46
Figure 2.18: The detailed diagnosis of the Recently unmanaged components measure	46
Figure 2.19: The detailed diagnosis of the Not running agents	55
Figure 2.20: The detailed diagnosis of the Not installed agents	55
Figure 2.21: The detailed diagnosis of the Recent messages measure	60
Figure 2.22: The detailed diagnosis of the Recent messages measure reported by the eG Threshold Log Test	71
Figure 2.23: The detailed diagnosis of the Failed threshold tests measure	77
Figure 2.24: The detailed diagnosis of the Recent messages measure of the eG Trend Log test	82
Figure 2.25: The tests mapped to the eG Access Layer	95

Chapter 1: Introduction

The purpose of an IT infrastructure monitoring solution is to observe the performance of the applications, devices, and systems that underlie their mission-critical service offerings, proactively detect potential deviations, and promptly alert administrators to the root-cause of service outages/slowdowns. To be able to provide such critical performance monitoring and fault management services in a timely, reliable, and uninterrupted manner, the monitoring solution, like the components it monitors, should perform at peak capacity at all times!

An efficient monitoring solution is one that not only monitors other applications but also analyzes its own performance at periodic intervals. This way, the solution can instantly capture snags in its operations, accurately point administrators to the source of these performance degradations, and facilitate the speedy resolution of issues. In the absence of such self-monitoring capabilities, you may end up in a situation where slowdowns experienced by the monitoring solution - say, owing to a session overload, a backend that is low on space, or data collectors that are not operating - delay problem identification and alerting in the target environment, causing issues to go unnoticed or to aggravate.

To avoid such unpleasant eventualities, the eG Enterprise Suite provides a dedicated eG Manager monitoring model. To know more about monitoring the eG Manager refer to, Section **Chapter 2**.

1.1 Pre-Requisites for Monitoring eG Manager

The **eG agent should be configured to connect to the JRE used by the eG manager to pull out metrics of interest**. To enable the eG agent to connect to the JRE, by default, **JMX support has been enabled for the eG manager's JRE**. JMX enables external programs like the eG agent to connect to the JRE of an application and pull out metrics in real-time.

1.1.1 Securing the 'jmxremote.password' file

To enable the eG agent to use JMX (that requires **authentication only**) for monitoring the eG manager on Windows, you need to ensure that the *jmxremote.password* file in the <JAVA_HOME>\jre\lib\management folder used by the eG manager is accessible **only by the Owner of that file**. To achieve this, do the following:

1. Login to the eG manager host as a local/domain administrator.
2. Browse to the location of the *jmxremote.password* file using Windows Explorer.

3. Next, right-click on the *jmxremote.password* file and select the **Properties** option (see Figure 1.1).

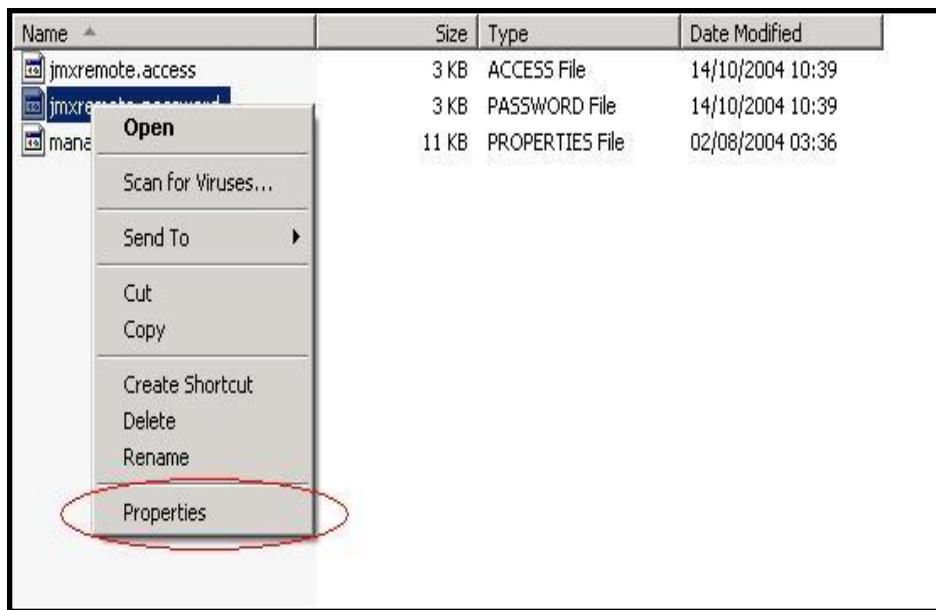


Figure 1.1: Selecting the Properties option

4. From Figure 1.2 that appears next, select the **Security** tab.

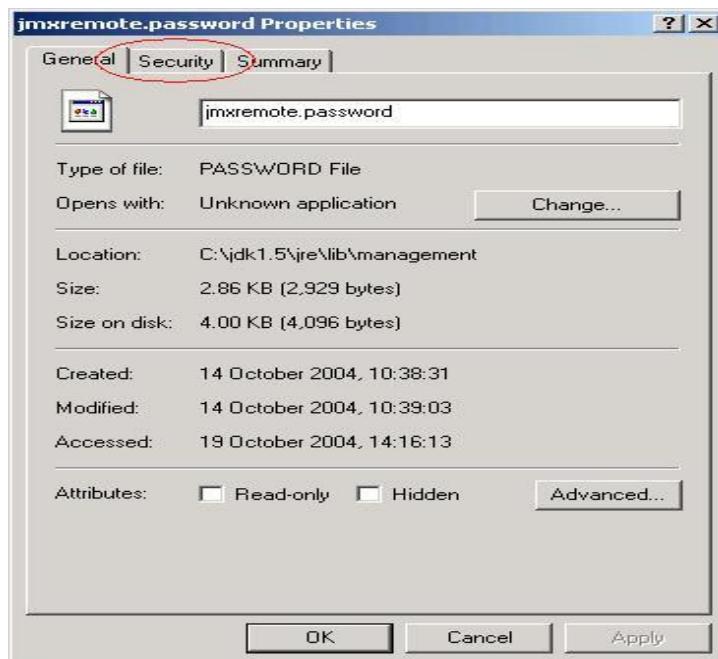


Figure 1.2: The Properties dialog box

However, if you are on Windows XP and the computer is not part of a domain, then the **Security** tab may be missing. To reveal the **Security** tab, do the following:

5. Open Windows Explorer, and choose **Folder Options** from the **Tools** menu.
6. Select the **View** tab, scroll to the bottom of the **Advanced Settings** section, and clear the check box next to **Use Simple File Sharing**.

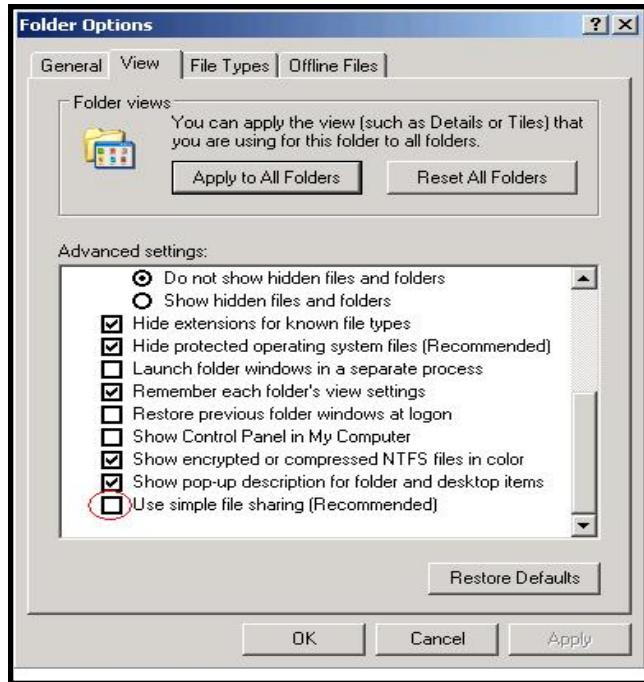


Figure 1.3: Deselecting the 'Use simple file sharing' option

7. Click **OK** to apply the change
8. When you restart Windows Explorer, the **Security** tab would be visible.
9. Next, select the **Advanced** button in the **Security** tab of Figure 1.4.

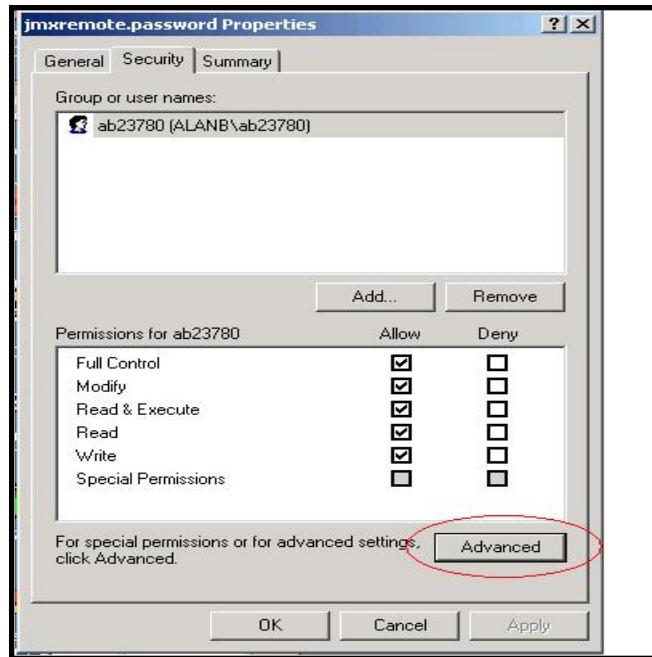


Figure 1.4: Clicking the Advanced button

10. Select the **Owner** tab to see who the owner of the file is.

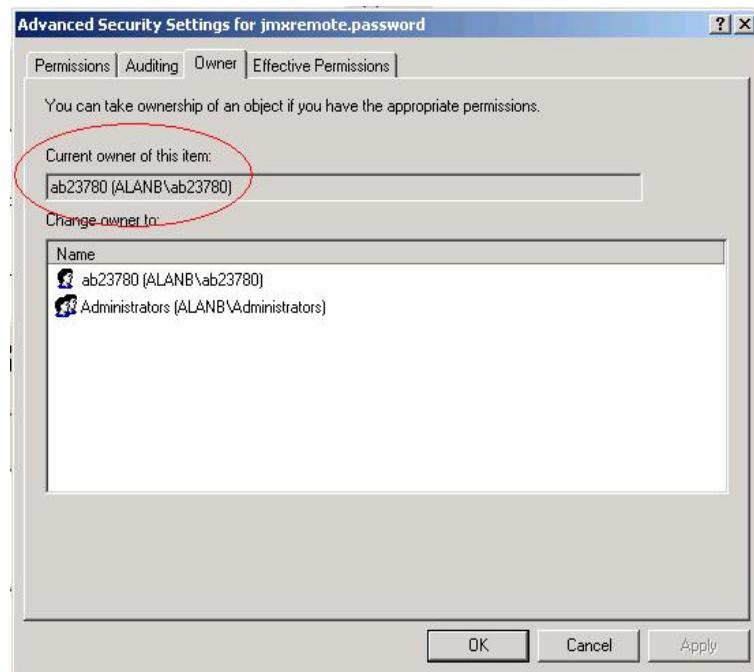


Figure 1.5: Verfying whether the Owner of the file is the same as the application Owner

11. Then, proceed to select the **Permissions** tab in Figure 1.5 to set the permissions. If the

jmxremote.password file has inherited its permissions from a parent directory that allows users or groups other than the **Owner** to access the file, then clear the **Inherit from parent the permission entries that apply to child objects** check box in Figure 1.6.

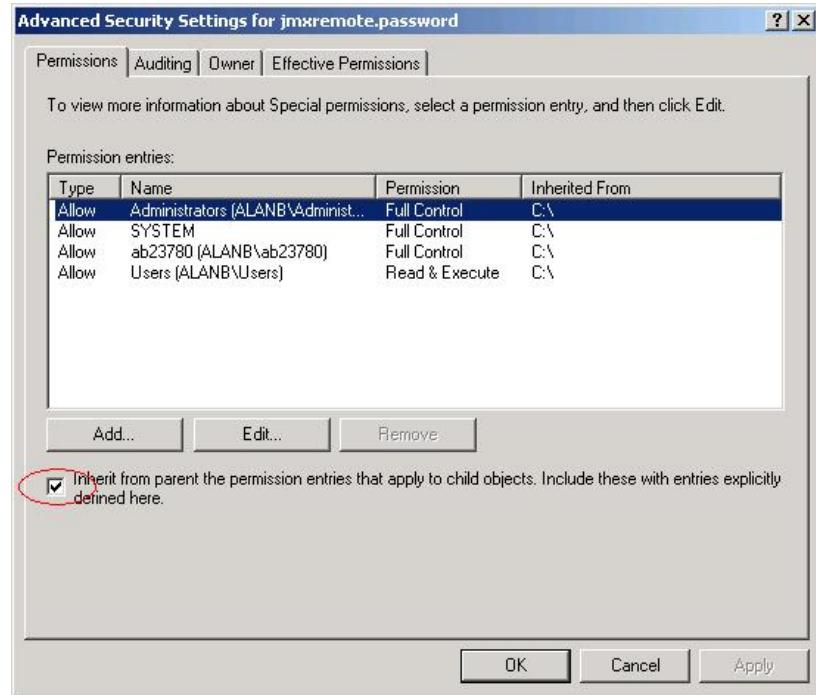


Figure 1.6: Disinheriting permissions borrowed from a parent directory

12. At this point, you will be prompted to confirm whether the inherited permissions should be copied from the parent or removed. Press the **Copy** button in Figure 1.7.

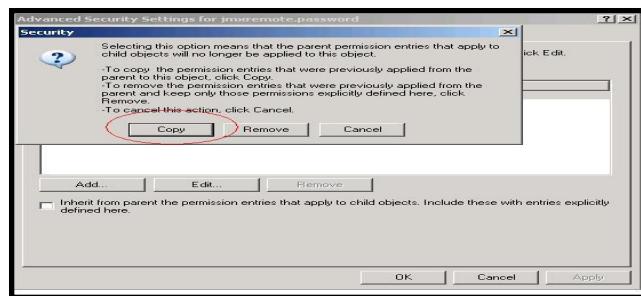


Figure 1.7: Copying the inherited permissions

13. Next, remove all permission entries that allow the *jmxremote.password* file to be accessed by users or groups other than the file **Owner**. For this, click the user or group and press the **Remove** button in Figure 1.8. At the end of this exercise, only a single permission entry granting **Full Control** to the owner should remain in Figure 1.8.

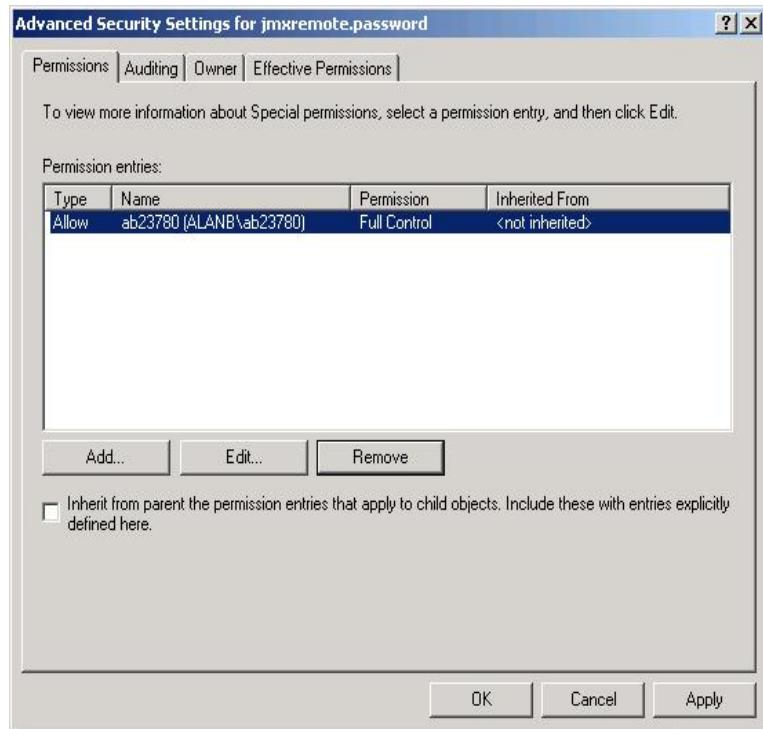


Figure 1.8: Granting full control to the file owner

14. Finally, click the **Apply** and **OK** buttons to register the changes. The password file is now secure, and can only be accessed by the file owner.

Note:

If you are trying to enable JMX for an eG manager on Linux, you might encounter issues with the way hostnames are resolved.

To solve it you might have to set the **-Djava.rmi.server.hostname=<hostname or localhost or ip>** property in the startup script of the eG manager.

If you are in local, simply try with **-Djava.rmi.server.hostname=localhost** or **-Djava.rmi.server.hostname=127.0.0.1**.

1.1.2 Enabling SNMP Support for the eG Manager's JRE

Instead of JMX, you can configure the eG agent to report JVM-related metrics using SNMP-based access to the Java runtime MIB statistics.

In some environments, SNMP access might have to be authenticated by an ACL (Access Control List), and in some other cases, it might not require an ACL.

If SNMP access **does not require ACL authentication**, then follow the steps below to enable SNMP support:

1. Login to the eG manager host.
2. Ensure that the SNMP service and the SNMP Trap Service are running on the host.
3. Next, edit the **management.properties** file in the <EG_INSTALL_DIR>\manager folder (on Windows; on Unix, this will be /opt/egurkha/manager) of the eG manager.
4. In the **management.properties** file, you will find a '**For SNMP Settings**' block that is 'commented' by default.

```
#####
# For SNMP Settings #####
#
#com.sun.management.snmp.port=<port-number>
#com.sun.management.snmp.acl=false
#com.sun.management.snmp.acl.file=filepath
#com.sun.management.snmp.interface=localhost
#
#####
#
```

5. Uncomment the contents of this block as indicated below:

```
#####
# For SNMP Settings #####
#
com.sun.management.snmp.port=<port-number>
com.sun.management.snmp.acl=false
com.sun.management.snmp.acl.file=filepath
com.sun.management.snmp.interface=localhost
#
#####
#
```

6. Against the **com.sun.management.snmp.port** parameter in the 'uncommented' block, enter the SNMP Port of the eG manager.

For instance, if the SNMP port is 1166, then the first line of the above specification will be:

```
com.sun.management.snmp.port=1166
```

7. Next, set the **com.sun.management.snmp.interface** parameter to the IP address of the host from

which the eG manager's JRE will accept SNMP requests. By default, it is set to *localhost*, indicating that the eG manager's JRE will accept SNMP requests from the eG manager's host only. To ensure that the JRE services only those SNMP requests that are received from the eG agent, set this parameter to the IP address of the agent host. For instance, if the eG agent that monitors the eG manager is executing on 192.168.10.152, then the **com.sun.management.snmp.interface** specification will be:

```
com.sun.management.snmp.interface=192.168.10.152
```

8. Next, edit the start-up script of the eG manager, include the following line it, and save the script file.


```
-Dcom.sun.management.config.file=<management.properties_file_path>
```

For instance, on a Windows host, the *<management.properties_file_path>* can be expressed as: **D:\eGurkha\manager**.

On other hand, on a Unix/Linux/Solaris host, a sample *<management.properties_file_path>* specification will be as follows: **/opt/egurkha/manager**

On the contrary, if SNMP access requires **ACL authentication**, then follow the steps below to enable SNMP support for the JRE:

1. Login to the eG manager host. If the eG manager is executing on a Windows host, login as a local/domain administrator.
2. Ensure that the SNMP service and SNMP Trap Service are running on the host.
3. Copy the *snmp.acl.template* file in the *<JAVA_HOME>\jre\lib\management* folder to another location on the local host. Rename the *snmp.acl.template* file as *snmp.acl*, and copy the *snmp.acl* file back to the *<JAVA_HOME>\jre\lib\management* folder.
4. Next, edit the *snmp.acl* file, and set rules for SNMP access in the file.

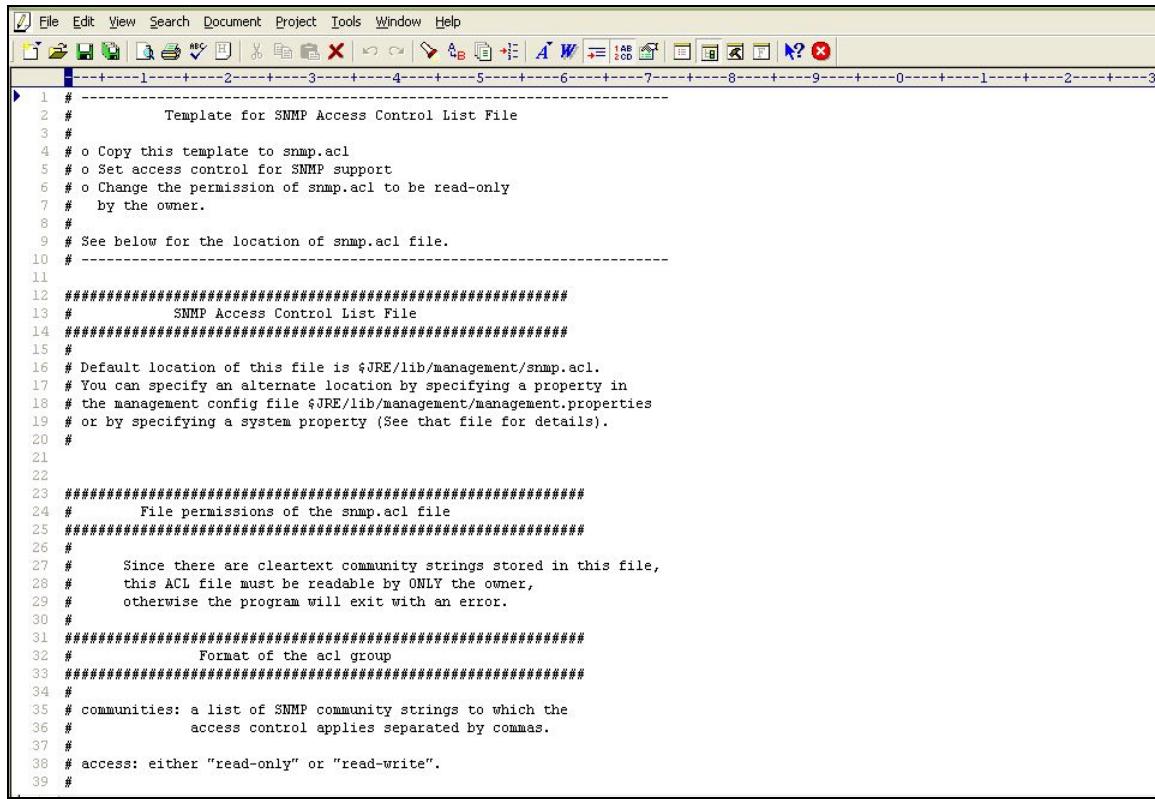


The screenshot shows a text editor window with a menu bar (File, Edit, View, Search, Document, Project, Tools, Window, Help) and a toolbar with various icons. The main area displays the content of the snmp.acl file. The file is a template for an SNMP Access Control List. It includes comments explaining the purpose of the file, its location, file permissions, and the format of the ACL group. It also specifies that community strings are stored in cleartext and must be readable by the owner. The file ends with a note about the format of the ACL group, communities, and access levels.

```
1 # -----
2 #           Template for SNMP Access Control List File
3 #
4 # o Copy this template to snmp.acl
5 # o Set access control for SNMP support
6 # o Change the permission of snmp.acl to be read-only
7 #     by the owner.
8 #
9 # See below for the location of snmp.acl file.
10 # -----
11
12 ##### SNMP Access Control List File #####
13 #
14 #####
15 #
16 # Default location of this file is ${JRE}/lib/management/snmp.acl.
17 # You can specify an alternate location by specifying a property in
18 # the management config file ${JRE}/lib/management/management.properties
19 # or by specifying a system property (See that file for details).
20 #
21
22
23 ##### File permissions of the snmp.acl file #####
24 #
25 #####
26 #
27 #     Since there are cleartext community strings stored in this file,
28 #     this ACL file must be readable by ONLY the owner,
29 #     otherwise the program will exit with an error.
30 #
31 ##### Format of the acl group #####
32 #
33 #####
34 #
35 # communities: a list of SNMP community strings to which the
36 #             access control applies separated by commas.
37 #
38 # access: either "read-only" or "read-write".
39 #
```

Figure 1.9: The snmp.acl file


5. For that, first scroll down the file to view the sample code block revealed by Figure 1.10.

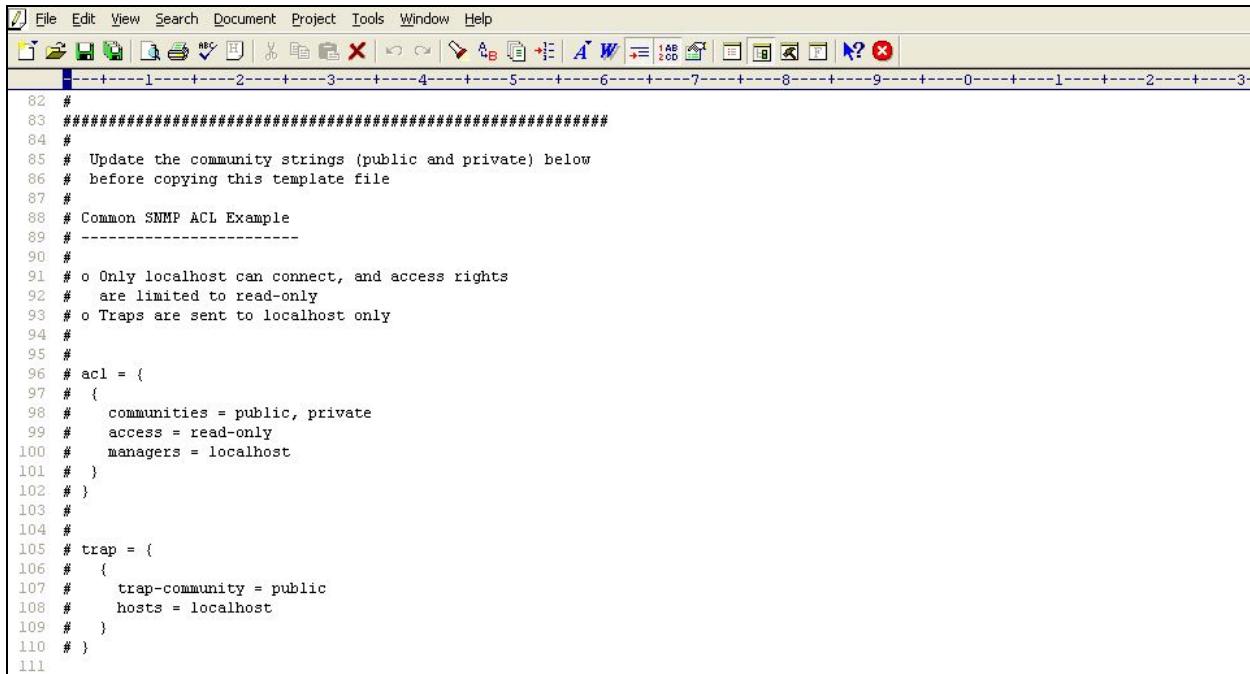

```
File Edit View Search Document Project Tools Window Help
1 2 3 4 5 6 7 8 9 0 1 2 3
82 #
83 ##### Update the community strings (public and private) below
84 #
85 # Update the community strings (public and private) below
86 # before copying this template file
87 #
88 # Common SNMP ACL Example
89 #
90 #
91 # o Only localhost can connect, and access rights
92 # are limited to read-only
93 # o Traps are sent to localhost only
94 #
95 #
96 # acl =
97 # {
98 #   communities = public, private
99 #   access = read-only
100 #   managers = localhost
101 # }
102 #
103 #
104 #
105 # trap =
106 # {
107 #   trap-community = public
108 #   hosts = localhost
109 # }
110 #
111
```

Figure 1.10: The snmp.acl file revealing the SNMP ACL example


6. Uncomment the code block by removing the # symbol preceding each line of the block as indicated by Figure 1.11.

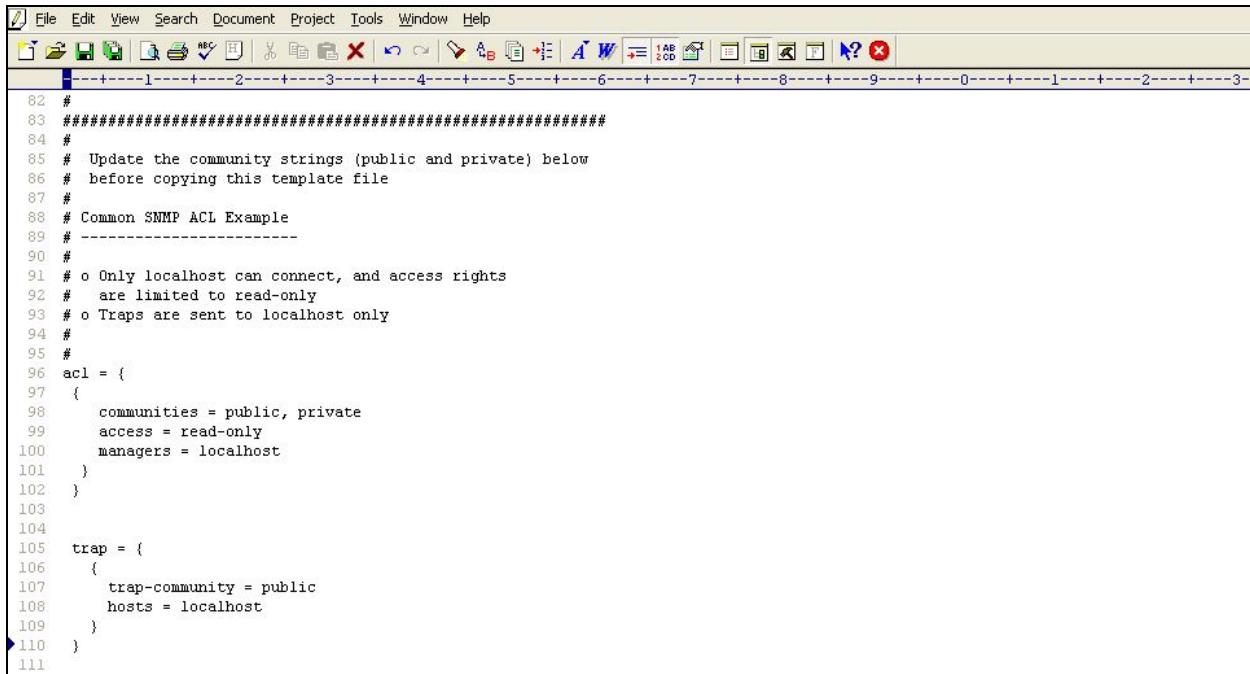

```
File Edit View Search Document Project Tools Window Help
1 2 3 4 5 6 7 8 9 0 1 2 3
82 #
83 ##### Update the community strings (public and private) below
84 #
85 # Update the community strings (public and private) below
86 # before copying this template file
87 #
88 # Common SNMP ACL Example
89 #
90 #
91 # o Only localhost can connect, and access rights
92 # are limited to read-only
93 # o Traps are sent to localhost only
94 #
95 #
96 acl =
97 {
98   communities = public, private
99   access = read-only
100  managers = localhost
101 }
102 #
103 #
104 #
105 trap =
106 {
107   trap-community = public
108   hosts = localhost
109 }
110 #
111
```

Figure 1.11: Uncommenting the code block

7. Next, edit the code block to suit your environment.
8. The *ac*/ block expects the following parameters:
 - *communities* : Provide a comma-separated list of community strings, which an SNMP request should carry for it to be serviced by this JRE; in the example illustrated by Figure 17, the community strings recognized by this JRE are *public* and *private*. You can add more to this list, or remove a *community string* from this list, if need be.
 - *access* : Indicate the access rights that SNMP requests containing the defined *communities* will have; in Figure 1.11, SNMP requests containing the community string *public* or *private*, will have only *read-only* access to the MIB statistics. To grant full access, you can specify *read-write* instead.
 - *managers* : Specify a comma-separated list of SNMP managers or hosts from which SNMP requests will be accepted by this JRE; in the example illustrated by Figure 1.11, all SNMP requests from the *localhost* will be serviced by this JRE. Typically, since the SNMP requests originate from an eG agent, the IP of the eG agent should be configured against the *managers* parameter. For instance, if the IP address of the agent host is 192.16.10.160, then, to ensure that the JRE accepts requests from the eG agent alone, set *managers* to 192.168.10.160, instead of *localhost*.
9. Every *ac*/ block in the *snmp.ac*/ file should have a corresponding *trap* block. This *trap* block should be configured with the following values:
 - *trap-community*: Provide a comma-separated list of community strings that can be used by SNMP traps sent by the eG manager to the *managers* specified in the *ac*/ block. In the example of Figure 1.11, all SNMP traps sent by the eG manager being monitored should use the community string *public* only.
 - *hosts*: Specify a comma-separated list of IP addresses / host names of hosts from which SNMP traps can be sent. In the case of Figure 1.11, traps can be sent by the *localhost* only. If a single *snmp.ac*/ file is being centrally used by multiple applications/devices executing on multiple hosts, then to ensure that all such applications are able to send traps to the configured SNMP *managers* (in the *ac*/ block), you can provide the IP address/hostname of these applications as a comma-separated list against *hosts*.
10. Figure 1.12 depicts how the *ac* and *trap* blocks can be slightly changed to suit the monitoring needs of an application.

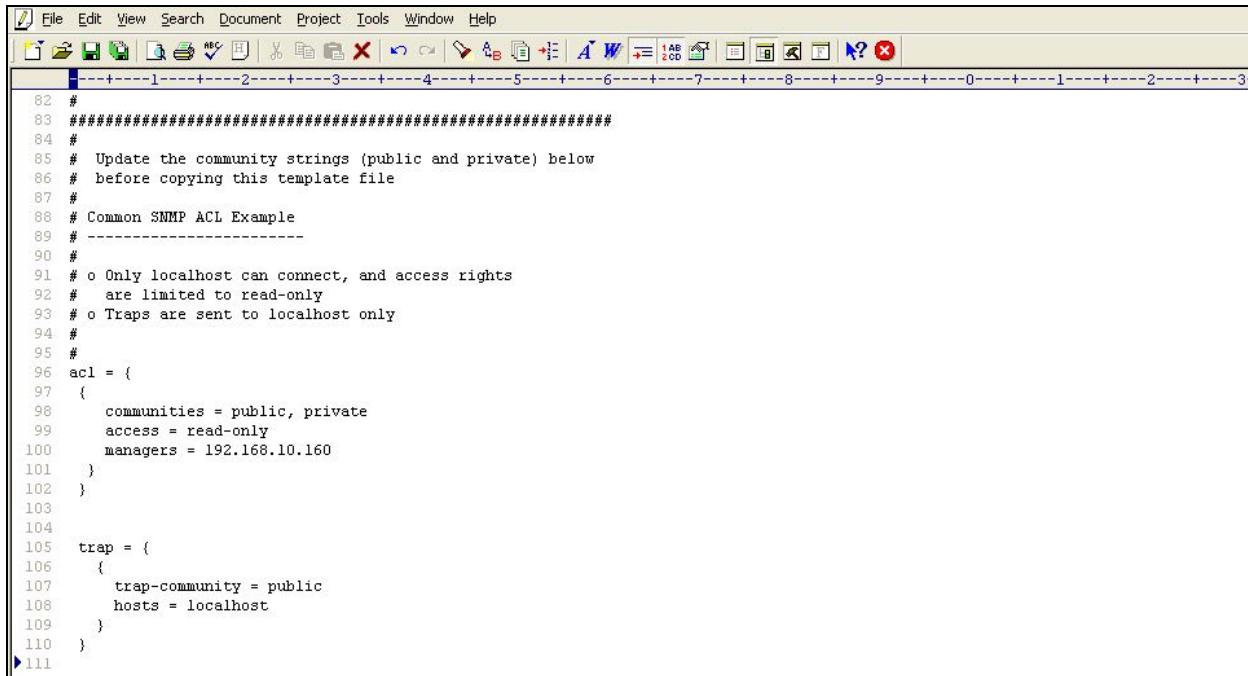

```

82 #
83 ######
84 #
85 # Update the community strings (public and private) below
86 # before copying this template file
87 #
88 # Common SNMP ACL Example
89 #
90 #
91 # o Only localhost can connect, and access rights
92 # are limited to read-only
93 # o Traps are sent to localhost only
94 #
95 #
96 acl = {
97   {
98     communities = public, private
99     access = read-only
100    managers = 192.168.10.160
101  }
102 }
103
104
105 trap = {
106   {
107     trap-community = public
108     hosts = localhost
109   }
110 }
111

```

Figure 1.12: The edited block

11. Then, proceed to make the *snmp.acl* file secure by granting a single user “full access” to that file. For monitoring an eG manager executing on Windows in particular, only the *Owner* of the *snmp.acl* file should have full control of that file. To know how to grant this privilege to the *Owner* of a file, refer to the *Monitoring Java Applications* document. This section actually details the procedure for making the *jmxremote.password* file on Windows, secure. Use the same procedure for making the *snmp.acl* file on Windows secure, but make sure that you select the *snmp.acl* file and not the *jmxremote.password* file.

In case of an eG manager executing on Solaris / Linux hosts on the other hand, any user can be granted full access to the *snmp.acl* file, by following the steps below:

- Login to the eG manager host as the user who is to be granted full control of the *snmp.acl* file.
- Issue the following command:

chmod 600 snmp.acl

- This will automatically grant the login user full access to the *jmxremote.password* file.

12. Next, edit the **management.properties** file in the <EG_INSTALL_DIR>\manager folder (on Windows; on Unix, this will be: /opt/egurkha/manager).
13. Uncomment the 'For SNMP Settings' block therein as indicated below:

```
#####
# For SNMP Settings #####
#####

com.sun.management.snmp.port=<port-number>
com.sun.management.snmp.acl=false
com.sun.management.snmp.acl.file=filepath
com.sun.management.snmp.interface=localhost

#####
#####


```

14. Set the **com.sun.management.snmp.port** parameter in the block to the SNMP port of the eG manager. Then, set the **com.sun.management.snmp.acl** parameter to **true** (default: **false**). Next, against the **com.sun.management.snmp.acl.file** parameter, specify the full path to the **snmp.acl** file on the eG manager. Finally, provide the IP address of the host from which the eG manager's JRE should accept SNMP requests, against the **com.sun.management.snmp.interface** parameter. If this is set to, *0.0.0.0*, then it indicates that the JRE will accept SNMP requests from any host in the environment. To ensure that the JRE services only those SNMP requests that are received from the eG agent, set the **com.sun.management.snmp.interface** parameter to the IP address of the agent host.

For example, if the eG manager being monitored listens for SNMP requests at port number 1166, the eG agent monitoring the eG manager is deployed on *192.168.10.152*, and these SNMP requests need to be authenticated using the *snmp.acl* file in the *D:\bea\jrockit_150_11\jre\lib* directory, then the above specification will read as follows:

```
com.sun.management.snmp.port=1166
com.sun.management.snmp.acl=true      com.sun.management.snmp.acl.file=D:\\bea\\jrockit_
150_11\\jre\\lib\\management\\snmp.acl
com.sun.management.snmp.interface=192.168.10.152
```

However, if the eG manager being monitored is executing on a Unix/Solaris/Linux host, and the *snmp.acl* file is in the */usr/jdk1.5.0_05/jre/lib/management* folder of the host, then the **com.sun.management.snmp.acl.file** parameter will be set to:

```
com.sun.management.snmp.acl.file =/usr/jdk1.5.0_05/jre/lib/management/snmp.acl
```

15. Next, edit the start-up script of the eG manager, include the following line in it, and save the script file.

```
-Dcom.sun.management.config.file=<management.properties_file_path>
```

For instance, on a Windows host, the *<management.properties_file_path>* can be expressed as: D:\eGurkha\manager.

On other hand, on a Unix/Linux/Solaris host, the *<management.properties_file_path>* specification will be as follows: /opt/egurkha/manager.

Chapter 2: Monitoring the eG Manager

The eG Enterprise Suite provides a dedicated eG Manager monitoring model that monitors each of the core functions of the eG manager at configured frequencies and reports abnormalities (if any).

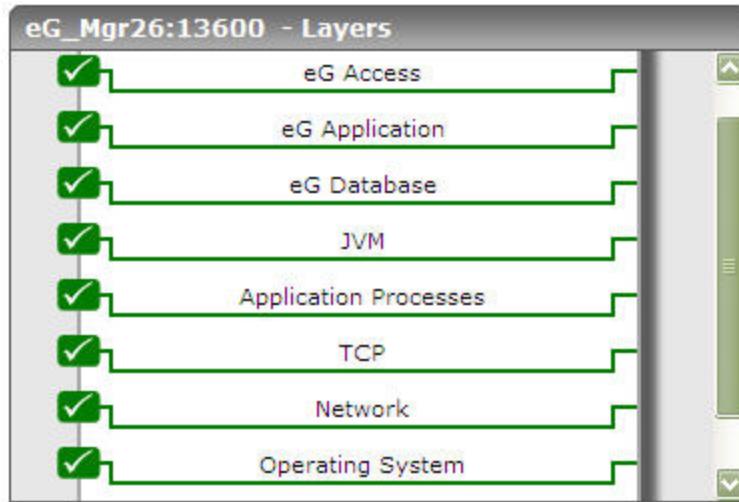


Figure 2.1: Layer model of the eG Manager

Each layer of Figure 1 above is mapped to tests that report a wealth of performance information related to the eG manager. To pull out these performance metrics, the eG agent can be deployed on the eG manager host itself (agent-based) or on any remote Windows host in the environment (agentless).

Regardless of where it is installed, the **eG agent should be configured to connect to the JRE used by the eG manager to pull out metrics of interest**. To enable the eG agent to connect to the JRE, by default, **JMX support has been enabled for the eG manager's JRE**. JMX enables external programs like the eG agent to connect to the JRE of an application and pull out metrics in real-time.

With the help of the metrics collected via JMX, eG administrators can find quick and accurate answers for the following queries:

- Has database cleanup run today?
- Did cleanup take too long to complete?
- Was cleanup incomplete on any table? If so, which ones?
- Did cleanup fail on any table? If so, which ones?

- Does the database connection pool have enough free connections?
- Are too many connections to the database waiting to close?
- Does the eG database have too many large sized tables and tables with many rows?
- Are any eG agents not running currently?
- Have any eG agents configured on the manager not being physically installed?
- Did any errors occur on the eG manager? If so, when - during manager installation/configuration/starting? during threshold computation? or at the time of trend computation?
- Have all object pools on the eG manager been correctly sized? Are there any object pools that are running out of free objects?
- Is any servlet responding poorly to client requests?
- How busy is the state manager process?
- How is the threshold manager performing? Is it taking too long to compute thresholds?
- On what tables did threshold computation fail and why?
- Did trend run today?
- Is the trend manager process healthy? Is it taking an unusually long time to compute trends?
- Did trend computation fail on any table? If so, which ones?
- Are cleanup/threshold computation/trend computation performed by separate Java processes or by the eG manager itself?
- How many users are registered with the eG Enterprise system and how many user subscriptions are about to expire?
- Is the eG manager overloaded with sessions? If so, what are the sessions that are currently active on the manager?
- Who are the distinct users who are logged into the manager, and when did they login?

The sections that follow will discuss the top 4 layers of Figure 2.1 only, as the other layers have been discussed extensively in the *Monitoring Unix and Windows Servers* document.

2.1 The JVM Layer

The tests mapped to this layer report the overall health and resource usage of the eG manager's JVM. To pull out JVM-related statistics from the eG manager, the eG agent uses either of the following

mechanisms:

- Using SNMP-based access to the Java runtime MIB statistics of the eG manager;
- By contacting the Java runtime (JRE) of the eG manager via JMX
- This is why, each test mapped to the **JVM** layer provides administrators with the option to pick a monitoring mode - i.e., either **JMX** or **SNMP**. The remaining test configuration depends upon the mode chosen. Section 1.1.2 will explain how to enable SNMP support for the eG manager's JRE.

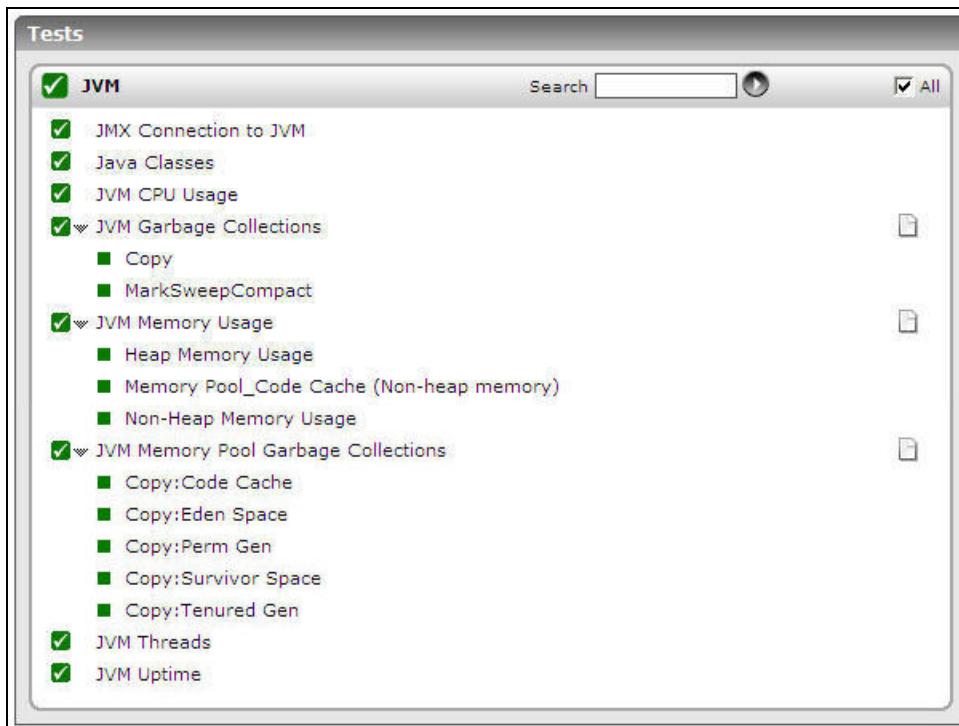


Figure 2.2: The tests mapped to the JVM layer

2.2 The eG Database Layer

The eG manager uses an Oracle or an Microsoft SQL database to store performance metrics reported by the eG agent. To ensure the continuous availability of the eG manager, the eG database should be available, accessible, and have sufficient storage space at all times. The tests mapped to this layer focus on the health of the eG backend, and reveals the following:

- Whether the automatic database cleanup operations are functioning properly;
- Whether the database connection pool has adequate free connections;

- Whether the database has many large tables.

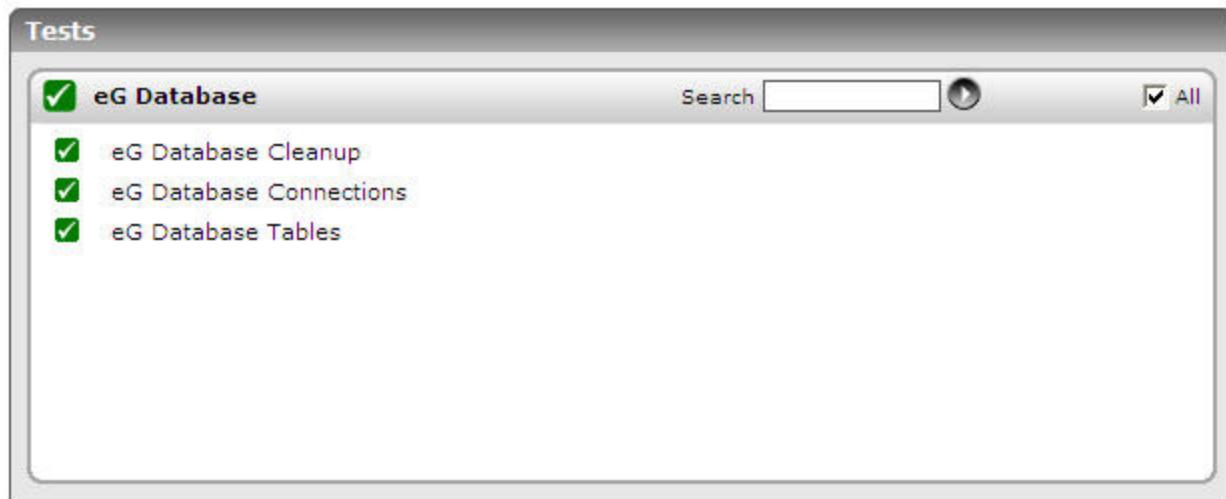


Figure 2.3: The tests mapped to the eG Database layer

2.2.1 eG Database Cleanup

To conserve space in the eG backend, administrators can schedule the automatic cleanup of tables from the eG database at specified intervals. If the cleanup process does not function as per schedule, the database may grow in size, thereby choking manager operations. You can avoid this by using this test to periodically check on the status of the cleanup activity, quickly detect cleanup failures, and also zero-in on the exact tables for which the activity failed, so that remedial measures can be swiftly initiated.

Target of the test : The eG Manager

Agent deploying the test : An internal/remote agent

Outputs of the test : One set of results for the eG manager being monitored

Configurable parameters for the test

Parameter	Description
Test period	How often should the test be executed .
Host	The host for which the test is to be configured.
Port	The port number at which the specified host listens.
JMX Remote Port	Here, specify the port at which the JMX listens for requests from remote hosts. In the

Parameter	Description
	<EG_MANAGER_INSTALL_DIR>\manager directory (on Windows; on Unix, this will be the /opt/egurkha/manager directory) of the eG manager, you will find a management.properties file. Set the port defined against the com.sun.management.jmxremote.port parameter of the file as the JMX Remote Port.
User, Password, and By default, JMX requires no authentication or security. Therefore, the User, Password , Confirm Password and Confirm Password parameters are set to <i>none</i> by default.	
JNDIName	The JNDIName is a lookup name for connecting to the JMX connector. By default, this is <i>jmxrmi</i> . If you have registered the JMX connector in the RMI registry using a different lookup name, then you can change this default value to reflect the same.
JMX Provider	This test uses a JMX Provider to access the MBean attributes of the eG manager and collect metrics. Specify the package name of this JMX Provider here. By default, this is set to com.sun.jmx.remote.protocol .
Timeout	Specify the duration (in seconds) for which this test should wait for a response from the eG manager. If there is no response from the eG manager beyond the configured duration, the test will timeout. By default, this is set to 240 seconds.
Detailed Diagnosis	<p>To make diagnosis more efficient and accurate, the eG Enterprise suite embeds an optional detailed diagnostic capability. With this capability, the eG agents can be configured to run detailed, more elaborate tests as and when specific problems are detected. To enable the detailed diagnosis capability of this test for a particular server, choose the On option. To disable the capability, click on the Off option.</p> <p>The option to selectively enable/disable the detailed diagnosis capability will be available only if the following conditions are fulfilled:</p> <ul style="list-style-type: none"> • The eG manager license should allow the detailed diagnosis capability • Both the normal and abnormal frequencies configured for the detailed diagnosis measures should not be 0.

Measurements made by the test

Measurement	Description	Measurement Unit	Interpretation
Cleanup status	Indicates the current status of the database cleanup activity.		The values that this measure reports and the numeric values that correspond to them have been discussed in the table below:

Measurement	Description	Measurement Unit	Interpretation								
			<table border="1"> <thead> <tr> <th>Measure Value</th><th>Numeric Value</th></tr> </thead> <tbody> <tr> <td>Done</td><td>1</td></tr> <tr> <td>Running</td><td>0</td></tr> <tr> <td>Error</td><td>2</td></tr> </tbody> </table> <p>Note: By default, this measure reports the Measure Values listed in the table above to indicate the current database cleanup status. The graph of this measure however, represents the same using the numeric equivalents only.</p>	Measure Value	Numeric Value	Done	1	Running	0	Error	2
Measure Value	Numeric Value										
Done	1										
Running	0										
Error	2										
Time taken for cleanup	Indicates the total time taken for the entire cleanup process.	Minutes	Ideally, the value of this measure should be low. A steady rise in this measure value is a cause for concern, as it indicates that the eG manager is taking an unusually long time to cleanup the database. This could be because of the presence of a large volume of data to be cleaned up. You may hence want to consider tuning the cleanup frequency, so that the database always has less data to cleanup.								
Total successfully cleaned tables	Indicates the number of tables that were successfully cleaned up.	Number	Use the detailed diagnosis of this measure to know which tables were successfully cleaned.								
Time since recent cleanup	Indicates the elapsed time since the last cleanup.	Minutes	With the help of this measure, you can quickly detect whether a scheduled cleanup occurred on the eG database or not.								
Has cleanup run today?	Indicates whether cleanup has run this day or not.		Typically, cleanup is scheduled to take place at the end of every day. If the value of this measure is Yes , it indicates that cleanup has run today.								

Measurement	Description	Measurement Unit	Interpretation						
			<p>On the other hand, if this measure reports the value <i>No</i>, it indicates that cleanup is yet to run for that day or has not run at all.</p> <p>The numeric values that correspond to the current day's cleanup status are as follows:</p> <table border="1"> <thead> <tr> <th>Measure Value</th><th>Numeric Value</th></tr> </thead> <tbody> <tr> <td>Yes</td><td>1</td></tr> <tr> <td>No</td><td>0</td></tr> </tbody> </table> <p>Note:</p> <p>By default, this measure reports the Measure Values listed in the table above to indicate whether/not cleanup has run today. The graph of this measure however, represents the same using the numeric equivalents only.</p>	Measure Value	Numeric Value	Yes	1	No	0
Measure Value	Numeric Value								
Yes	1								
No	0								
Is cleanup running as a separate process?	Indicates whether/not cleanup is running as a separate process.		<p>The eG manager runs as a Java process. The maximum heap memory that can be allocated to a 32-bit eG manager process is limited to 1.5 GB. The maximum heap memory allocation to a 64-bit eG manager process on the other hand, is limited to 3 GB.</p> <p>Even if the physical server on which the eG manager is installed has more memory, since it is a single Java process, the eG manager cannot exploit the additional memory available on the server. To overcome this limitation, in eG Enterprise, the critical eG manager functions such as email alert management, threshold</p>						

Measurement	Description	Measurement Unit	Interpretation						
			<p>computation, trending, and database cleanup activities can all be run as separate Java processes (i.e., in addition to the core eG manager process).</p> <p>Removing these key functions from the core eG manager process makes additional memory available for the core eG manager functions including data reception and analysis, alarm correlation, and web-based access and reporting. This reconfiguration of the eG manager into separate Java processes allows the eG manager to make better utilization of available server hardware resources and thereby offers enhanced scalability. In turn, this allows customers to get more leverage from their existing investment in the hardware that hosts the eG manager.</p> <p>If cleanup has been configured to run as a separate Java process, then the value of this measure will be Yes. If not, then this measure reports the value No.</p> <p>The numeric values that correspond to the measure values above are as follows:</p> <table border="1"> <thead> <tr> <th>Measure Value</th><th>Numeric Value</th></tr> </thead> <tbody> <tr> <td>Yes</td><td>1</td></tr> <tr> <td>No</td><td>0</td></tr> </tbody> </table> <p>Note:</p> <p>By default, this measure reports the Measure Values listed in the table</p>	Measure Value	Numeric Value	Yes	1	No	0
Measure Value	Numeric Value								
Yes	1								
No	0								

Measurement	Description	Measurement Unit	Interpretation						
			<p>above to indicate whether/not cleanup runs as a separate Java process. The graph of this measure however, represents the same using the numeric equivalents only.</p>						
Has cleanup timed out?	Indicates whether/not the last database cleanup process timed out.		<p>If the last cleanup process timed out, then the value of this measure will be <i>Yes</i>. If not, then this measure reports the value <i>No</i>.</p> <p>The numeric values that correspond to the measure values above are as follows:</p> <table border="1"> <thead> <tr> <th>Measure Value</th><th>Numeric Value</th></tr> </thead> <tbody> <tr> <td>Yes</td><td>1</td></tr> <tr> <td>No</td><td>0</td></tr> </tbody> </table> <p>Note:</p> <p>By default, this measure reports the Measure Values listed in the table above to indicate whether/not cleanup timed out. The graph of this measure however, represents the same using the numeric equivalents only.</p>	Measure Value	Numeric Value	Yes	1	No	0
Measure Value	Numeric Value								
Yes	1								
No	0								
Total backlogged tables	Indicates the number of tables on which cleanup was incomplete.	Number	<p>This measure indicates the number of tables on which cleanup occurred, but could not delete all the records that were marked for deletion.</p> <p>This can happen if a table contains too many records to be deleted. In such circumstances, the eG manager cleans up a few records from the table each day for the next few days.</p> <p>Use the detailed diagnosis of this measure to know which tables have records that are yet to be cleaned by</p>						

Measurement	Description	Measurement Unit	Interpretation
			cleanup.
Total tables that failed cleanup	Indicates the number of tables on which cleanup failed.	Number	Ideally, the value of this measure should be 0. A non-zero value is indicative of cleanup failures. Use the detailed diagnosis of this measure to isolate the tables on which cleanup failed.

The detailed diagnosis of the *Total successfully cleaned tables* measure lists the tables that were successfully cleaned and the time taken by the cleanup process to clean each table.

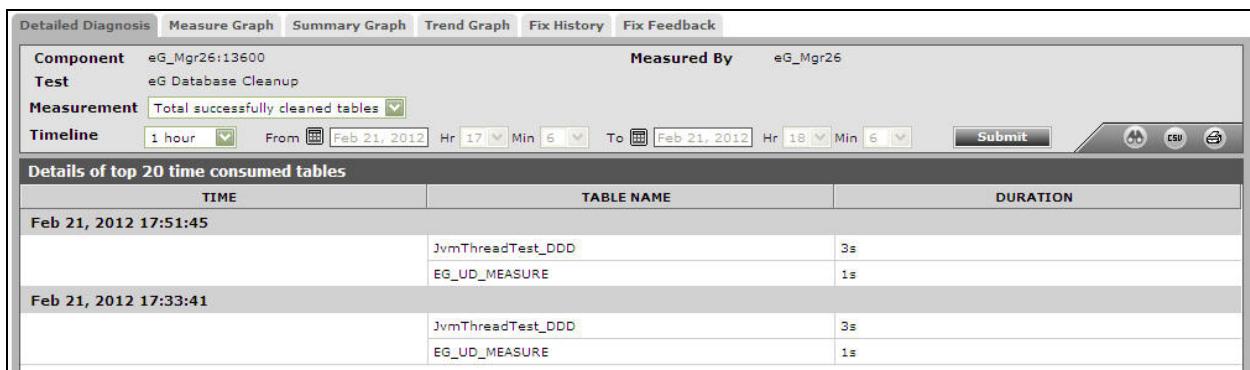


Figure 2.4: The detailed diagnosis of the Total successfully cleaned tables measure

The detailed diagnosis of the *Total backlogged tables* measure lists the tables on which cleanup was incomplete. For each table, the detailed diagnosis also provides the number of days of data from the table that is yet to be cleaned and number of days of data that has already been cleaned.

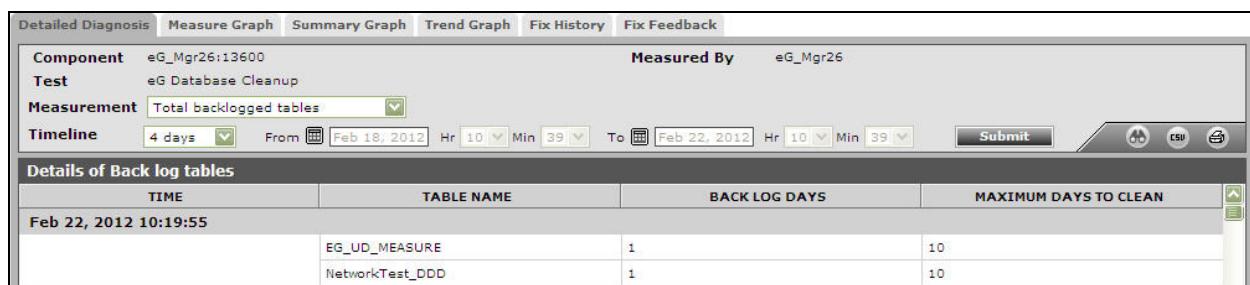


Figure 2.5: The detailed diagnosis of the Total backlogged tables measure

2.2.2 eG Database Connections Test

To optimize accesses to the database, the eG manager uses connection pooling. By using a pre-established set of connections and multiplexing requests over these connections, the eG manager ensures that individual connections are not established and closed for each request. Using the eG administrative interface, an administrator can configure the initial number of connections in the pool and the maximum number of connections. If the pool has not been configured with enough connections, then the eG manager may not be able to connect to the database to store the critical performance metrics reported by the eG agents. Therefore, to be able to judge the adequacy of this configuration, you need to understand how the eG manager uses the connection pool. The **eG Database Connections** test sheds light on the usage of the connection pool by the eG manager, and indicates whether/not the connection pool has been rightly sized.

Target of the test : The eG Manager

Agent deploying the test : An internal/remote agent

Outputs of the test : One set of results for the eG manager being monitored.

Configurable parameters for the test

Parameter	Description
Test period	How often should the test be executed .
Host	The host for which the test is to be configured.
Port	The port number at which the specified host listens.
JMX Remote Port	Here, specify the port at which the JMX listens for requests from remote hosts. In the <code><EG_MANAGER_INSTALL_DIR>\manager</code> directory (on Windows; on Unix, this will be the <code>/opt/egurkha/manager</code> directory) of the eG manager, you will find a management.properties file. Set the port defined against the com.sun.management.jmxremote.port parameter of the file as the JMX Remote Port.
User, Password, and Confirm Password	By default, JMX requires no authentication or security. Therefore, the User, Password , and Confirm Password parameters are set to <i>none</i> by default.
JNDIName	The JNDIName is a lookup name for connecting to the JMX connector. By default, this is <i>jmxrmi</i> . If you have registered the JMX connector in the RMI registry using a different lookup name, then you can change this default value to reflect the same.
JMX Provider	This test uses a JMX Provider to access the MBean attributes of the eG manager and

Parameter	Description
	collect metrics. Specify the package name of this JMX Provider here. By default, this is set to com.sun.jmx.remote.protocol .
Timeout	Specify the duration (in seconds) for which this test should wait for a response from the eG manager. If there is no response from the eG manager beyond the configured duration, the test will timeout. By default, this is set to 240 seconds.
Detailed Diagnosis	<p>To make diagnosis more efficient and accurate, the eG Enterprise suite embeds an optional detailed diagnostic capability. With this capability, the eG agents can be configured to run detailed, more elaborate tests as and when specific problems are detected. To enable the detailed diagnosis capability of this test for a particular server, choose the On option. To disable the capability, click on the Off option.</p> <p>The option to selectively enable/disable the detailed diagnosis capability will be available only if the following conditions are fulfilled:</p> <ul style="list-style-type: none"> • The eG manager license should allow the detailed diagnosis capability • Both the normal and abnormal frequencies configured for the detailed diagnosis measures should not be 0.

Measurements made by the test

Measurement	Description	Measurement Unit	Interpretation
Initial connections	Indicates the number of initial connections allocated to the pool.	Number	Both these parameters can be configured using the database settings page that appears when the Configure -> Data Management -> Database Settings menu sequence is followed in the eG administrative interface.
Maximum connections	Indicates the maximum number of database connections that the eG manager can use from the pool.	Number	Consider increasing the number of connections in the connection pool as the number of components monitored or the number of users accessing the system increases.
Used connections	Indicates the number of connections currently used by the eG manager.	Number	If the value of this measure grows dangerously close to the value of the Maximum connections measure, it indicates that the pool is rapidly running out of connections. In such a

Measurement	Description	Measurement Unit	Interpretation
			case, you can use the detailed diagnosis of this measure to know which classes are currently utilizing the database connections, and how many connections have been used per class. Classes that are over-utilizing database connections can thus be identified, and the reasons for the same can be determined.
Free connections	Indicates the time taken for connections to time out.	Number	A low value for this measure is a cause for concern, as it indicates that the connection pool does not have enough free connections. This could be owing to an increase in the number of components monitored or the number of users accessing the systems. You may hence want to consider fine-tuning the Initial Connections and Maximum Connections parameters (using the eG administrative interface), so that the pool is sufficiently sized to handle the increase in workload.
Connection timeout	Indicates the time taken for connections to time out.	Secs	By carefully observing the value for this measure over time, you can figure out the maximum ideal time for which a connection should stay alive.
Total connections	Indicates the total number of connections in the pool.	Number	
Connections waiting	Indicates the number of connections that are currently waiting to be closed on the eG manager.	Number	Ideally, the value of this measure should be low. A very high value of this measure is a cause for concern as it indicates that too many connections to the database are currently open and are waiting to be closed, but are unable to close owing to certain issues.

Measurement	Description	Measurement Unit	Interpretation
			Besides unnecessarily consuming connections from the pool and causing a paucity of connections in the pool, these waiting connections, if allowed to increase, can even cause the manager to restart.

The detailed diagnosis of the *Used connections* measure lists the eG manager classes that are using connections from the database connection pool, and the number of connections each class is using. Classes that are consuming too many connections can thus be identified and the reasons for this abnormal usage can be investigated.

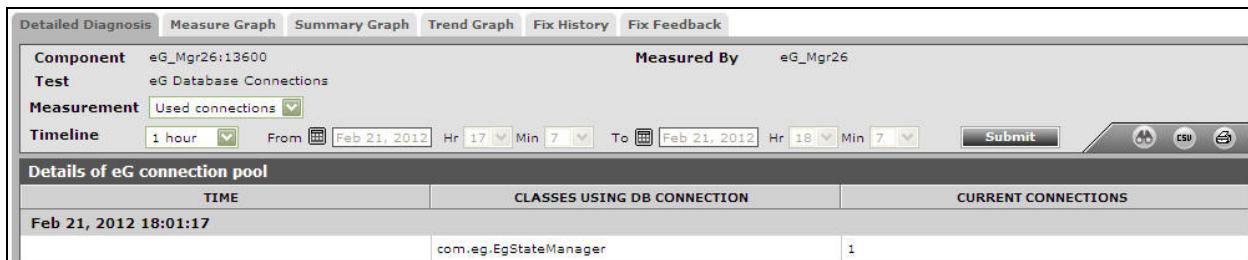


Figure 2.6: The detailed diagnosis of the Used connections measure

2.2.3 eG Database Tables Test

This test monitors the tables in the eG database and turns the spotlight on the following:

- Large sized tables in terms of the volume of data they store;
- Tables with too many rows of data;
- Tables that are badly structured - i.e., tables without index or tables without primary key

Target of the test : The eG Manager

Agent deploying the test : An internal/remote agent

Outputs of the test : One set of results for the eG manager being monitored

Configurable parameters for the test

Parameter	Description
Test period	How often should the test be executed .
Host	The host for which the test is to be configured.
Port	The port number at which the specified host listens.
JMX Remote Port	Here, specify the port at which the JMX listens for requests from remote hosts. In the <EG_MANAGER_INSTALL_DIR>\manager directory (on Windows; on Unix, this will be the /opt/egurkha/manager directory) of the eG manager, you will find a management.properties file. Set the port defined against the com.sun.management.jmxremote.port parameter of the file as the JMX Remote Port.
User, Password, and Confirm Password	By default, JMX requires no authentication or security. Therefore, the User, Password , and Confirm Password parameters are set to <i>none</i> by default.
JNDIName	The JNDIName is a lookup name for connecting to the JMX connector. By default, this is <i>jmxrmi</i> . If you have registered the JMX connector in the RMI registry using a different lookup name, then you can change this default value to reflect the same.
JMX Provider	This test uses a JMX Provider to access the MBean attributes of the eG manager and collect metrics. Specify the package name of this JMX Provider here. By default, this is set to com.sun.jmx.remote.protocol .
Timeout	Specify the duration (in seconds) for which this test should wait for a response from the eG manager. If there is no response from the eG manager beyond the configured duration, the test will timeout. By default, this is set to 240 seconds.
Maximum Table Size	Specify the maximum size limit (in KB) that a table should exceed in order to be counted as a <i>high volume table</i> .
Maximum Table Size	Specify the minimum size limit (in KB) that a table should fall below in order to be counted as a <i>low volume table</i> .
Maximum Row Size	This test reports all tables with more number of rows than the row limit specified here as <i>Tables with many rows</i> .
Minimum Row Size	This test counts reports tables with less number of rows than the row limit specified here as <i>Tables with few rows</i> .
Detailed Diagnosis	To make diagnosis more efficient and accurate, the eG Enterprise suite embeds an optional detailed diagnostic capability. With this capability, the eG agents can be configured to run detailed, more elaborate tests as and when specific problems are detected. To enable the detailed diagnosis capability of this test for a particular server,

Parameter	Description
	<p>choose the On option. To disable the capability, click on the Off option.</p> <p>The option to selectively enable/disable the detailed diagnosis capability will be available only if the following conditions are fulfilled:</p> <ul style="list-style-type: none"> • The eG manager license should allow the detailed diagnosis capability • Both the normal and abnormal frequencies configured for the detailed diagnosis measures should not be 0.

Measurements made by the test

Measurement	Description	Measurement Unit	Interpretation
Database Size	Indicates the total size of the eG database.	MB	
Total tables	Indicates the total number of tables that currently exist in the eG database.	Number	
Default tables	Indicates the number of default tables in the eG database.	Number	
Dynamic tables	Indicates the number of dynamic tables currently present in the eG manager database.		Dynamic tables are typically a set of virtual tables used to record current database activity.
Tables without primary key	Indicates the number of tables without a primary key.	Number	<p>The purpose of a primary key is to uniquely identify each record in a table.</p> <p>An index on the other hand, is an alphabetical listing of the terms found on database records and the number of records on which the terms are found.</p> <p>A database table can survive without a primary key or an index, but this detersthe whole purpose of a database: the</p>

Measurement	Description	Measurement Unit	Interpretation
			easy retrieval of information.
Tables without index	Indicates the number of tables without an index.	Number	To know which tables do not have an index or a primary key, use the detailed diagnosis of this measure.
Newly created tables	Indicates the number of tables created in the eG database since the last measurement period.	Number	New tables will be created in the eG database as and when new components are monitored in the environment.
Active sessions	Indicates the number of active sessions to the eG backend.	Number	This is a good indicator of the current load on the eG database. Use the detailed diagnosis of this measure to view the hosts from which the active sessions originated.
Inactive sessions	Indicates number of currently inactive sessions to the eG database.	Number	Open, but inactive sessions are serious resource drains. Use the detailed diagnosis of this measure to view the hosts that are responsible for initiating the inactive sessions, determine the reason for the inactivity, and if found necessary, terminate the sessions in order to protect the database from abuse.
Tables with highest volume of data	Indicates the number of tables that contain a high data volume.	Number	This measure value includes all tables that are of a size greater than the Maximum Table Size configured for this test. Use the detailed diagnosis to identify the large sized tables.
Tables with lowest volume of data	Indicates the number of tables that contain a low data volume.	Number	This measure value includes all tables that are of a size lesser than the Minimum Table Size configured for this test. Use the detailed diagnosis to identify the small sized tables.
Tables with many rows	Indicates the number of tables with many rows.	Number	This measure value includes all tables with more number of rows than the

Measurement	Description	Measurement Unit	Interpretation
			<p>Maximum Row Size configured for this test.</p> <p>Use the detailed diagnosis to identify the tables with too many rows.</p>
Tables with few rows	Indicates the number of tables with few rows.	Number	<p>This measure value includes all tables with less number of rows than the Minimum Row Size configured for this test.</p> <p>Use the detailed diagnosis to identify the tables with only a few rows.</p>

The detailed diagnosis of the *Tables with highest volume of data* measure displays all the tables with high data volume, and reports the current size of each table.

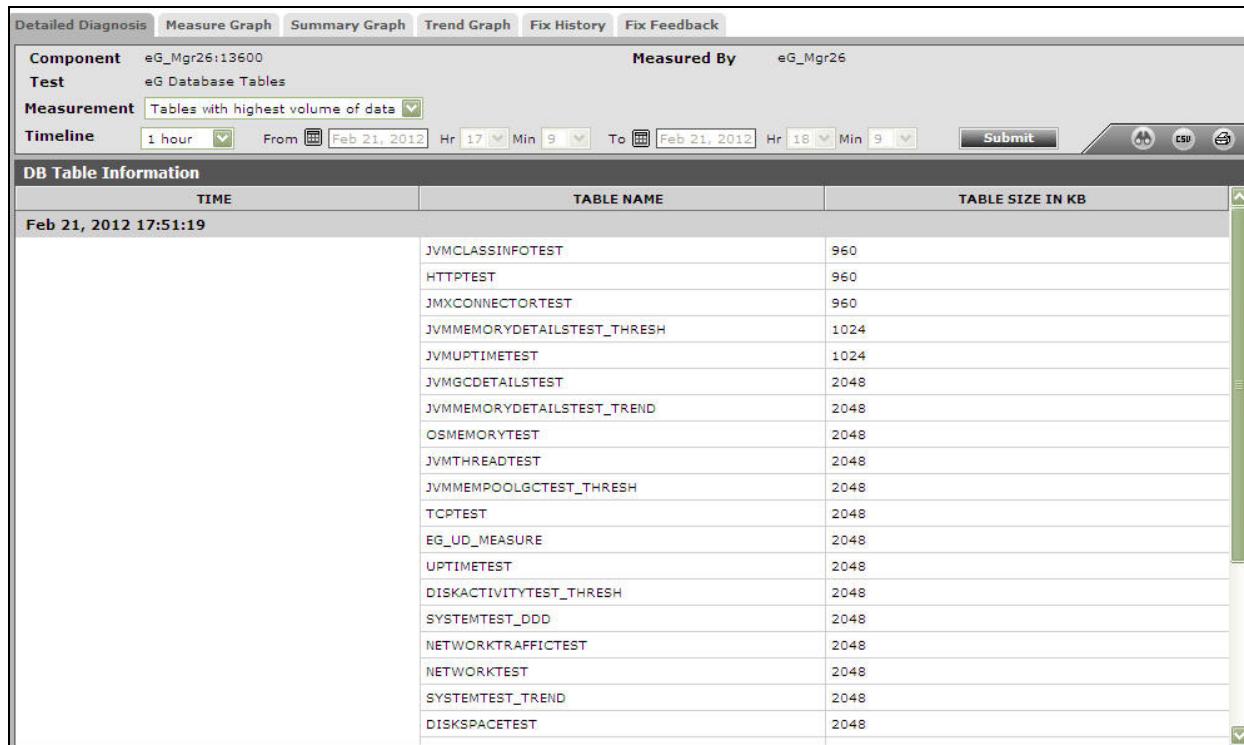


Figure 2.7: The detailed diagnosis of the Tables with highest volume of data measure

The detailed diagnosis of the *Tables with lowest volume of data* measure displays all the tables with low data volume, and reports the current size of each table.

TIME	TABLE NAME	TABLE SIZE IN KB
Feb 21, 2012 17:51:19	UPTIMETEST_DDD	64
	ALARM	64
	LOGICALDISK_CF	64
	PAGEFILE_CF	64
	OSINFOTEST_CF	64
	AUDITLOG	64
	USER_PREF	64
	MEASURE_LAST	64
	ERR_TBL	64
	STREAMTUNABLE_CF	64
	PROCESSORINFO_CF	64
	HOTFIX_CF	64
	WINDOWSREG_CF	64
	DDMEASURE_LAST	64
	USER_REPORTS	64
	METATEST	64
	CONFIG_CHANGE_MASTER	64
	IPCSHAREDMEMORY_CF	64
	IPCSEMAPHORES_CF	64

Figure 2.8: The detailed diagnosis of the Tables with lowest volume of data measure

The detailed diagnosis of the *Tables with many rows* measure displays all the tables with many rows, and the number of rows in each table.


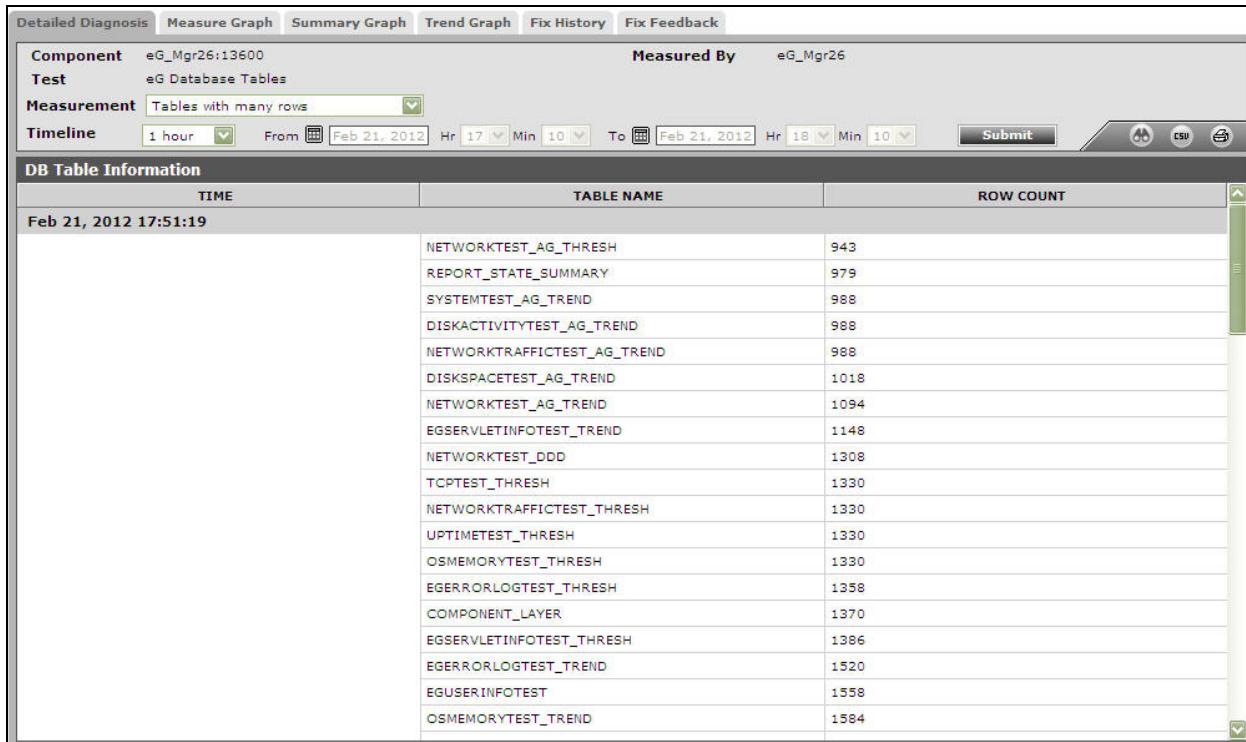


Figure 2.9: The detailed diagnosis of the Tables with many rows measure

The detailed diagnosis of the *Tables with few rows* measure displays all the tables with few rows, and the number of rows in each table.

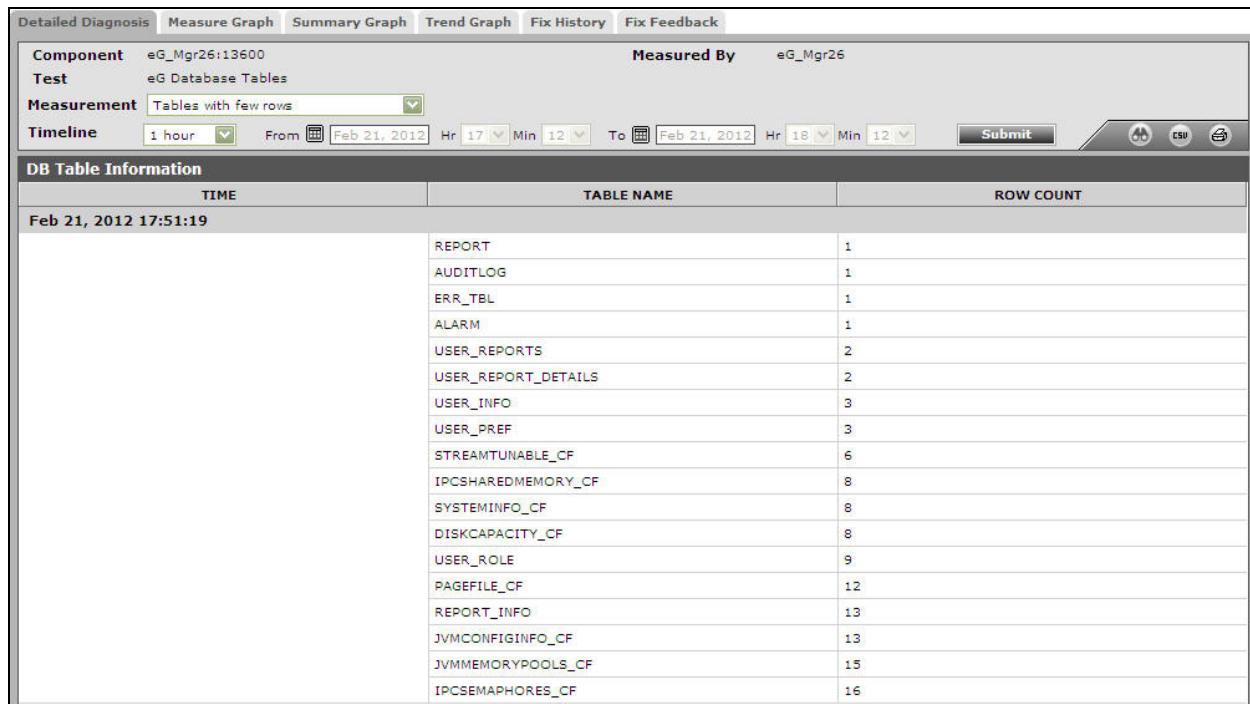

The screenshot shows the 'Detailed Diagnosis' interface of the eG Manager. The 'Measurement' dropdown is set to 'Tables with few rows'. The 'TIME' dropdown shows '1 hour' from 'Feb 21, 2012' at '17:51:19'. The 'Measured By' section shows 'eG_Mgr26'. The 'DB Table Information' table lists various database tables and their row counts:

TIME	TABLE NAME	ROW COUNT
Feb 21, 2012 17:51:19	REPORT	1
	AUDITLOG	1
	ERR_TBL	1
	ALARM	1
	USER_REPORTS	2
	USER_REPORT_DETAILS	2
	USER_INFO	3
	USER_PREF	3
	STREAMTUNABLE_CF	6
	IPCSHAREDMEMORY_CF	8
	SYSTEMINFO_CF	8
	DISKCAPACITY_CF	8
	USER_ROLE	9
	PAGEFILE_CF	12
	REPORT_INFO	13
	JVMCONFIGINFO_CF	13
	JVMMEMORYPOOLS_CF	15
	IPCSEMAPHORES_CF	16

Figure 2.10: The detailed diagnosis of the Tables with few rows measure

The detailed diagnosis of the *Tables without primary key* measure displays all the tables that do not have any primary key.

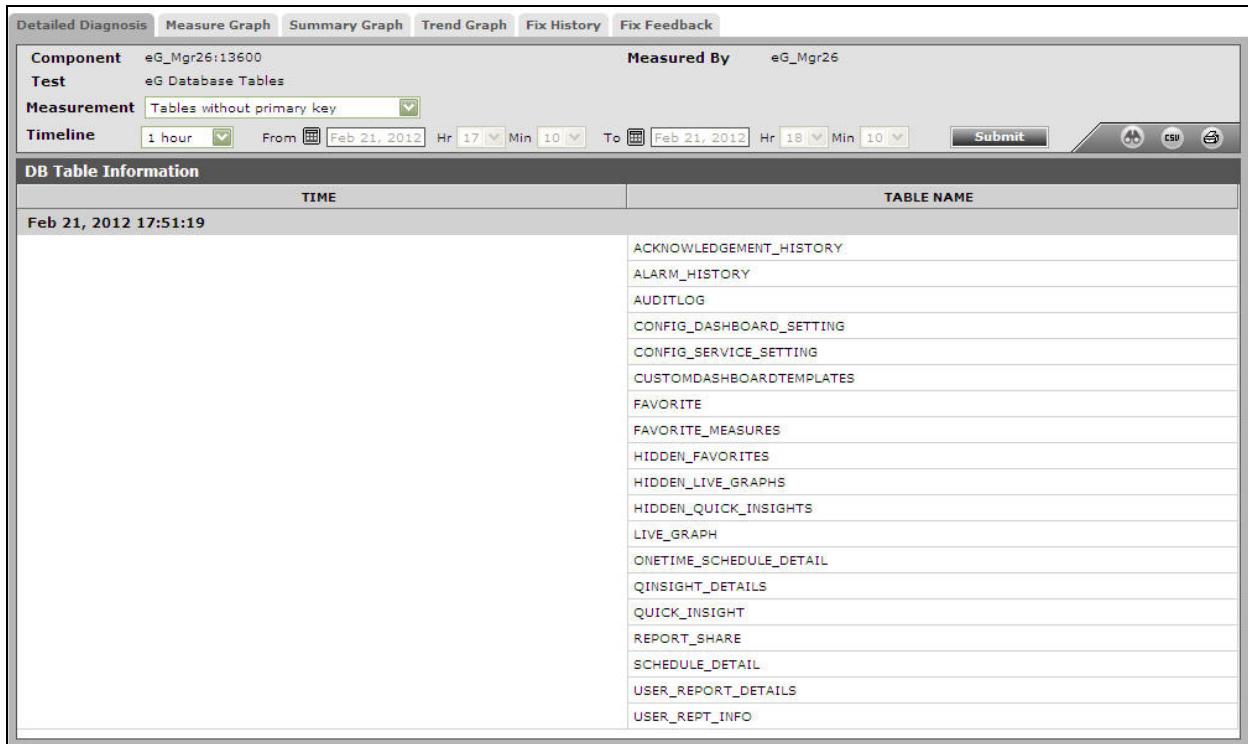


Figure 2.11: The detailed diagnosis of the Tables without primary key measure

The detailed diagnosis of the *Tables without index* measure displays all the tables that do not have any index.

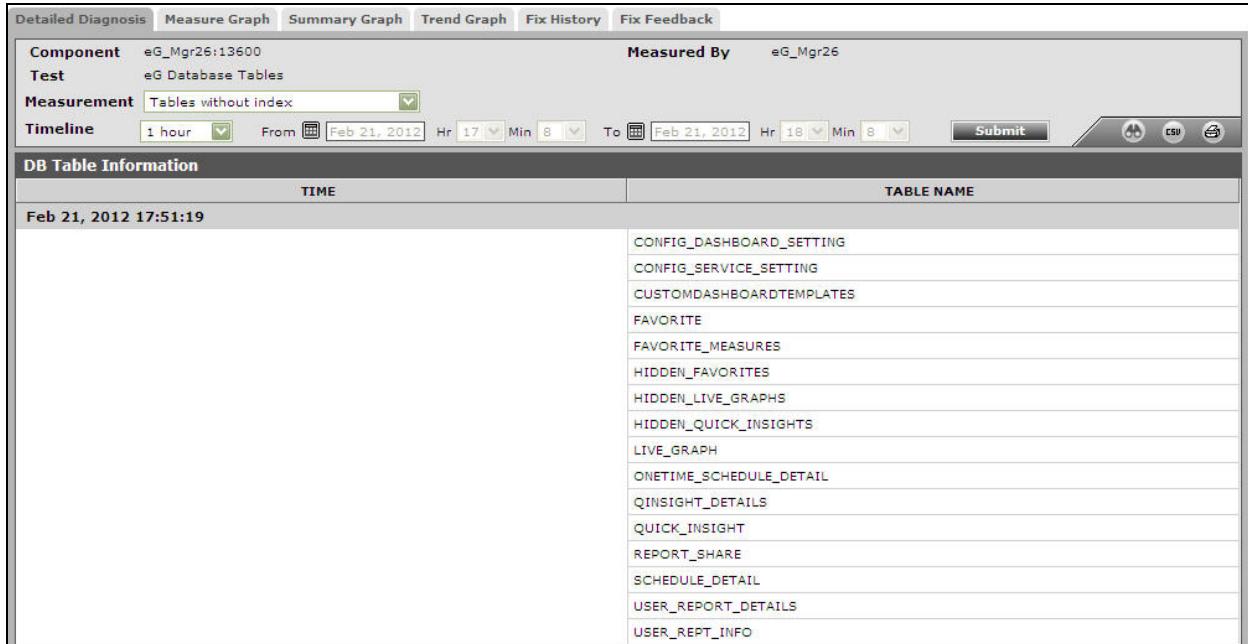


Figure 2.12: The detailed diagnosis of the Tables without index measure

2.2.4 eG Table Triggers Test

This test scans each table in the eG database for triggers and reports the total number of triggers, the count of triggers enabled, and those that have been dropped/are missing.

Target of the test : The eG Manager

Agent deploying the test : An internal/remote agent

Outputs of the test : One set of results for the eG manager being monitored

Configurable parameters for the test

Parameter	Description
Test period	How often should the test be executed .
Host	The host for which the test is to be configured.
Port	The port number at which the specified host listens.
JMX Remote Port	Here, specify the port at which the JMX listens for requests from remote hosts. In the <code><EG_MANAGER_INSTALL_DIR>\manager</code> directory (on Windows; on Unix, this will be the <code>/opt/egurkha/manager</code> directory) of the eG manager, you will find a management.properties file. Set the port defined against the com.sun.management.jmxremote.port parameter of the file as the JMX Remote Port.
User, Password, and Confirm Password	By default, JMX requires no authentication or security. Therefore, the User, Password , and Confirm Password parameters are set to <i>none</i> by default.
JNDIName	The JNDIName is a lookup name for connecting to the JMX connector. By default, this is <i>jmxrmi</i> . If you have registered the JMX connector in the RMI registry using a different lookup name, then you can change this default value to reflect the same.
JMX Provider	This test uses a JMX Provider to access the MBean attributes of the eG manager and collect metrics. Specify the package name of this JMX Provider here. By default, this is set to com.sun.jmx.remote.protocol .
Timeout	Specify the duration (in seconds) for which this test should wait for a response from the eG manager. If there is no response from the eG manager beyond the configured duration, the test will timeout. By default, this is set to 240 seconds.
Detailed Diagnosis	To make diagnosis more efficient and accurate, the eG Enterprise suite embeds an optional detailed diagnostic capability. With this capability, the eG agents can be configured to run detailed, more elaborate tests as and when specific problems are

Parameter	Description
	<p>detected. To enable the detailed diagnosis capability of this test for a particular server, choose the On option. To disable the capability, click on the Off option.</p> <p>The option to selectively enable/disable the detailed diagnosis capability will be available only if the following conditions are fulfilled:</p> <ul style="list-style-type: none"> • The eG manager license should allow the detailed diagnosis capability • Both the normal and abnormal frequencies configured for the detailed diagnosis measures should not be 0.

Measurements made by the test

Measurement	Description	Measurement Unit	Interpretation
Total triggers count	Indicates the total number of triggers in the eG database.	Number	
Enabled triggers	Indicates the number of triggers that are currently enabled.	Number	
Disabled triggers	Indicates the number of triggers that are currently disabled.	Number	
Missing triggers	Indicates the number of triggers that have been dropped and are hence missing from the database.	Number	

2.2.5 eG Datafile Details Test

By periodically monitoring the I/O activity on each datafile on the eG database server and observing the growth in size of the datafile, this test sheds light on the following:

- Datafiles that are experiencing I/O bottlenecks;
- Datafiles that are consuming too much disk space

Note:

This test will not report metrics when a Microsoft SQL database is configured as the backend database for the eG manager.

Target of the test : The eG manager

Agent deploying the test : An internal agent

Outputs of the test : One set of results for each datafile on the eG database.

Configurable parameters for the test

Parameter	Description
Test period	How often should the test be executed .
Host	The host for which the test is to be configured.
Port	The port number at which the specified host listens.
DD Frequency	Refers to the frequency with which detailed diagnosis measures are to be generated for this test. The default is 1:1. This indicates that, by default, detailed measures will be generated every time this test runs, and also every time the test detects a problem. You can modify this frequency, if you so desire. Also, if you intend to disable the detailed diagnosis capability for this test, you can do so by specifying <i>none</i> against DD frequency.
Detailed Diagnosis	<p>To make diagnosis more efficient and accurate, the eG Enterprise suite embeds an optional detailed diagnostic capability. With this capability, the eG agents can be configured to run detailed, more elaborate tests as and when specific problems are detected. To enable the detailed diagnosis capability of this test for a particular server, choose the On option. To disable the capability, click on the Off option.</p> <p>The option to selectively enable/disable the detailed diagnosis capability will be available only if the following conditions are fulfilled:</p> <ul style="list-style-type: none"> • The eG manager license should allow the detailed diagnosis capability • Both the normal and abnormal frequencies configured for the detailed diagnosis measures should not be 0.

Measurements made by the test

Measurement	Description	Measurement Unit	Interpretation
Write rate	Indicates the rate at which writes occurred on this	Writes/Sec	

Measurement	Description	Measurement Unit	Interpretation
	datafile.		
Data write rate	Indicates the rate at which data was written to this datafile.	KB/Sec	
I/O stall writes	Indicates the total time taken to write to this datafile.	Millisecs	A high value for this measure could indicate a bottleneck while writing to the datafile. By comparing the value of this measure across datafiles, you can identify the data file to which write operations are taking too long to complete.
Read rate	Indicates the rate of reads from this datafile.	Reads/Sec	
Data read rate	Indicates the rate at which data was read from this datafile.	KB/Sec	
I/O stall reads	Indicates the total time taken to read from this datafile.	Millisecs	A high value for this measure could indicate a bottleneck while reading from the datafile. By comparing the value of this measure across datafiles, you can identify the datafile to which read operations are taking too long to complete.
I/O stall	Indicates the total time taken for I/O to complete on this datafile.	Millisecs	A high value for this measure could indicate an I/O bottleneck on this datafile.
Size on disk	Indicates the total size on disk of each datafile.	Bytes	This measure is used to determine the growth of the datafile. A low value is desired for this measure. A very high value, or a consistent increase in this value may adversely impact I/O operations. You may want to consider maintaining multiple datafiles of smaller sizes to

Measurement	Description	Measurement Unit	Interpretation
			improve I/O efficiency, and to speed up backup/restore operations.

2.3 The eG Application Layer

Using the tests mapped to this layer, you can quickly capture errors/warnings logged in the various eG manager logs, and instantly detect abnormalities in the functioning of the following:

- eG agents
- eG State manager process
- eG Threshold manager process
- eG Trend manager process
- eG Object Pools
- eG Servlets
- If the eG manager experiences a slowdown or a performance degradation, the tests mapped to this layer will give you effective pointers to the source of the slowdown.

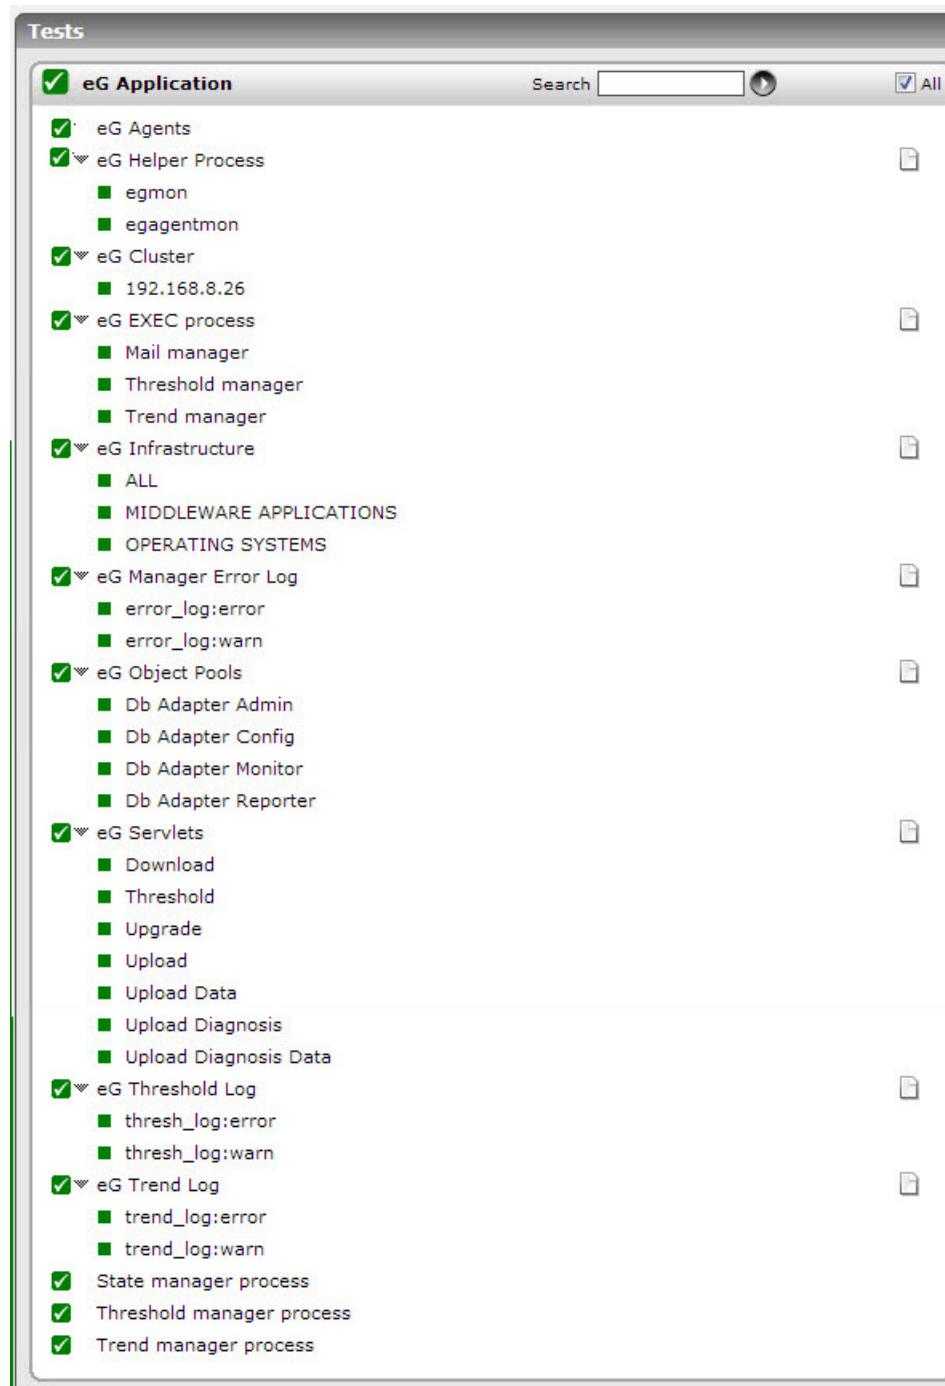


Figure 2.13: The tests mapped to the eG Application layer

2.3.1 eG Infrastructure Test

This test auto-discovers the applications managed by the eG Enterprise system, automatically categorizes the applications into pre-configured categories, and for every category, reports the total

number of managed, unmanaged, and deleted components. The test also tracks the recent management activity on the eG Enterprise system by reporting the number of components that were managed, unmanaged, and deleted, recently. Detailed diagnostics reveals the names of components managed, unmanaged, and deleted.

Target of the test : The eG Manager

Agent deploying the test : An internal/remote agent

Outputs of the test : One set of results for each category of components managed by the eG manager being monitored.

Configurable parameters for the test

Parameter	Description
Test period	How often should the test be executed .
Host	The host for which the test is to be configured.
Port	The port number at which the specified host listens.
JMX Remote Port	Here, specify the port at which the JMX listens for requests from remote hosts. In the <code><EG_MANAGER_INSTALL_DIR>\manager</code> directory (on Windows; on Unix, this will be the <code>/opt/egurkha/manager</code> directory) of the eG manager, you will find a management.properties file. Set the port defined against the com.sun.management.jmxremote.port parameter of the file as the JMX Remote Port.
User, Password, and Confirm Password	By default, JMX requires no authentication or security. Therefore, the User, Password , and Confirm Password parameters are set to <i>none</i> by default.
JNDIName	The JNDIName is a lookup name for connecting to the JMX connector. By default, this is <i>jmxrmi</i> . If you have registered the JMX connector in the RMI registry using a different lookup name, then you can change this default value to reflect the same.
JMX Provider	This test uses a JMX Provider to access the MBean attributes of the eG manager and collect metrics. Specify the package name of this JMX Provider here. By default, this is set to com.sun.jmx.remote.protocol .
Timeout	Specify the duration (in seconds) for which this test should wait for a response from the eG manager. If there is no response from the eG manager beyond the configured duration, the test will timeout. By default, this is set to 240 seconds.
DD Frequency	Refers to the frequency with which detailed diagnosis measures are to be generated for this test. The default is 1:1 . This indicates that, by default, detailed measures will be

Parameter	Description
	<p>generated every time this test runs, and also every time the test detects a problem. You can modify this frequency, if you so desire. Also, if you intend to disable the detailed diagnosis capability for this test, you can do so by specifying <i>none</i> against DD frequency.</p>
Detailed Diagnosis	<p>To make diagnosis more efficient and accurate, the eG Enterprise suite embeds an optional detailed diagnostic capability. With this capability, the eG agents can be configured to run detailed, more elaborate tests as and when specific problems are detected. To enable the detailed diagnosis capability of this test for a particular server, choose the On option. To disable the capability, click on the Off option.</p> <p>The option to selectively enable/disable the detailed diagnosis capability will be available only if the following conditions are fulfilled:</p> <ul style="list-style-type: none"> • The eG manager license should allow the detailed diagnosis capability • Both the normal and abnormal frequencies configured for the detailed diagnosis measures should not be 0.

Measurements made by the test

Measurement	Description	Measurement Unit	Interpretation
Total managed components	Indicates the total number of components of this category that are managed by the eG manager.	Number	Use the detailed diagnosis of this measure to know how many components of which component type are being managed by the eG manager.
Recently managed components	Indicates the number of components of this category that were managed during the last measurement period.	Number	Use the detailed diagnosis of this measure to know how many components of which component type were managed in the last measurement period.
Total unmanaged components	Indicates the total number of components of this category that are unmanaged.	Number	Use the detailed diagnosis of this measure to know how many components of which component type are unmanaged.
Recently unmanaged components	Indicates the number of components of this category that were	Number	Use the detailed diagnosis of this measure to know how many components of which component type

Measurement	Description	Measurement Unit	Interpretation
	unmanaged during the last measurement period.		were recently unmanaged.
Total deleted components	Indicates the total number of components of this category that have been deleted.	Number	Use the detailed diagnosis of this measure to know how many components of which component type have been deleted.
Recently deleted components	Indicates the number of components of this category that were deleted during the last measurement period.	Number	Use the detailed diagnosis of this measure to know how many components of which component type were recently deleted.

The detailed diagnosis of the *Total managed components* measure displays the number of components of each component type that are being managed.

Total Managed Components		
TIME	COMPONENT TYPE	NUMBER OF COMPONENTS
May 28, 2013 15:46:44	eG Manager	1
	Java Application	1

Figure 2.14: The detailed diagnosis of the Total managed components measure

The detailed diagnosis of the *Total unmanaged components* measure displays the number of components of each component type that have been unmanaged.

Total Unmanaged Components		
TIME	COMPONENT TYPE	NUMBER OF COMPONENTS
May 28, 2013 15:46:44	Tomcat	3

Figure 2.15: The detailed diagnosis of the Total unmanaged components measure

The detailed diagnosis of the *Total deleted components* measure displays the number of components of each component type that have been deleted.

Total Deleted Components		
TIME	COMPONENT TYPE	NUMBER OF COMPONENTS
May 28, 2013 15:46:44	Tomcat	1

Figure 2.16: The detailed diagnosis of the Total deleted components measure

The detailed diagnosis of the *Recently managed components* measure displays the number of components of each component type that were managed during the last measurement period.

Recently Managed Components		
TIME	COMPONENT TYPE	NUMBER OF COMPONENTS
May 28, 2013 14:44:40	Tomcat	1

Figure 2.17: The detailed diagnosis of the Recently managed components measure

The detailed diagnosis of the *Recently unmanaged components* measure displays the number of components of each component type that were unmanaged during the last measurement period.

Recently Unmanaged Components		
TIME	COMPONENT TYPE	NUMBER OF COMPONENTS
May 28, 2013 15:15:42	Tomcat	3

Figure 2.18: The detailed diagnosis of the Recently unmanaged components measure

2.3.2 eG EXEC Process Test

Administrators can optionally configure the eG manager to run each of its critical functions - i.e., email alert management, threshold computation, trending, and database cleanup activities - as separate processes, so that additional memory is available for the core eG manager functions such as data reception and analysis, alarm correlation, and web-based access and reporting. Using this test, you can identify the manager functions that have been set to execute as separate processes. The test also sheds light on situations where more than one instance of a process may be running, so that you can conserve resources by terminating the unnecessary instances.

Target of the test : The eG Manager

Agent deploying the test : An internal/remote agent

Outputs of the test : One set of results for critical eG manager function.

Configurable parameters for the test

Parameter	Description
Test period	How often should the test be executed .
Host	The host for which the test is to be configured.
Port	The port number at which the specified host listens.
JMX Remote Port	Here, specify the port at which the JMX listens for requests from remote hosts. In the <EG_MANAGER_INSTALL_DIR>\manager directory (on Windows; on Unix, this will be the /opt/egurkha/manager directory) of the eG manager, you will find a

Parameter	Description
	management.properties file. Set the port defined against the com.sun.management.jmxremote.port parameter of the file as the JMX Remote Port.
User, Password, and Confirm Password	User, Password, and Confirm Password. By default, JMX requires no authentication or security. Therefore, the User, Password, and Confirm Password parameters are set to <i>none</i> by default.
JNDIName	The JNDIName is a lookup name for connecting to the JMX connector. By default, this is <i>jmxrmi</i> . If you have registered the JMX connector in the RMI registry using a different lookup name, then you can change this default value to reflect the same.
JMX Provider	This test uses a JMX Provider to access the MBean attributes of the eG manager and collect metrics. Specify the package name of this JMX Provider here. By default, this is set to com.sun.jmx.remote.protocol .
Timeout	Specify the duration (in seconds) for which this test should wait for a response from the eG manager. If there is no response from the eG manager beyond the configured duration, the test will timeout. By default, this is set to 240 seconds.
DD Frequency	Refers to the frequency with which detailed diagnosis measures are to be generated for this test. The default is 1:1 . This indicates that, by default, detailed measures will be generated every time this test runs, and also every time the test detects a problem. You can modify this frequency, if you so desire. Also, if you intend to disable the detailed diagnosis capability for this test, you can do so by specifying <i>none</i> against DD frequency.
Detailed Diagnosis	<p>To make diagnosis more efficient and accurate, the eG Enterprise suite embeds an optional detailed diagnostic capability. With this capability, the eG agents can be configured to run detailed, more elaborate tests as and when specific problems are detected. To enable the detailed diagnosis capability of this test for a particular server, choose the On option. To disable the capability, click on the Off option.</p> <p>The option to selectively enable/disable the detailed diagnosis capability will be available only if the following conditions are fulfilled:</p> <ul style="list-style-type: none"> • The eG manager license should allow the detailed diagnosis capability • Both the normal and abnormal frequencies configured for the detailed diagnosis measures should not be 0.

Measurements made by the test

Measurement	Description	Measurement Unit	Interpretation						
Process count	Indicates the number of instances of this process that is currently running.	Number	<p>The test will report this measure only if the value of the '<i>Is EXEC process?</i>' measure is 'Yes'.</p> <p>The value 1 is desired for this measure. Any value above 1 is a sign that more instances of a process are unnecessarily running and draining resources. Use the detailed diagnosis of this measure to know the process ID of the additional processes, so that you can kill them to conserve resources.</p>						
Is EXEC process?	Indicates whether this critical manager function has been configured to execute as a separate process.		<p>The values that this measure can report and their corresponding numeric values have been listed in the table below:</p> <table border="1"> <thead> <tr> <th>Measure Value</th><th>Numeric Value</th></tr> </thead> <tbody> <tr> <td>Yes</td><td>1</td></tr> <tr> <td>No</td><td>0</td></tr> </tbody> </table> <p>It is recommended that the critical manager functions of email alert management, threshold computation, trending, and database cleanup activities are configured to run as separate processes. This is because, removing these key functions from the core eG manager process makes additional memory available for the core eG manager functions including data reception and analysis, alarm correlation, and web-based access and reporting. In addition, it also allows the eG manager to make better utilization of available server hardware resources and thereby offers enhanced scalability. In turn, this allows</p>	Measure Value	Numeric Value	Yes	1	No	0
Measure Value	Numeric Value								
Yes	1								
No	0								

Measurement	Description	Measurement Unit	Interpretation
			<p>customers to get more leverage from their existing investment in the hardware that hosts the eG manager.</p> <p>Note:</p> <p>By default, the test reports the Measure Values listed in the table above to indicate whether a function has been set to run as a separate process or not. In the graph of this measure however, the same is represented using the numeric equivalents only.</p>

2.3.3 eG Helper Process Test

To ensure enterprise-class monitoring, the eG manager includes the capability to monitor its various components and to recover from failure of these components. When the eG manager is started, a separate eG recovery process is started. This process is called eGmon. Likewise, when the eG agent is started, a recovery process named *eGagentmon* also starts simultaneously.

The eGmon process periodically attempts to connect to the eG manager, access the various components of the manager, including the eG database. If it detects any problems during such access, the recovery process attempts to perform further diagnosis. The specific actions performed by the recovery process are as follows:

- If the eG manager is not accessible, the recovery process attempts to restart the eG manager. If it fails to restart the eG manager thrice in succession, the recovery process generates an alert message to the eG administrator (using the **MAIL SENDER ID** specified in the **Mail Configuration** settings of the administration interface).
- If the eG manager is accessible, the recovery process tests the connections from the eG manager to the database server that it uses. In the event it detects problems, it alerts the administrator of potential problems with the database server access. By connecting directly to the database server (i.e., without using any other eG manager components), the recovery process further determines whether the database access problem is being caused either because of a database failure or because the eG manager's pool of database connections is not sufficient to handle the current load on the manager.

When the eG manager is stopped manually, the eG recovery process is also shutdown.

In the same way, the *eGagentmon* process attempts to connect to the eG agent, and upon detection of accessibility issues, restarts the agent. However, note that if the eG agent is stopped manually, the agent recovery process is also shutdown.

This test reports the health of the *eGmon* and *eGagentmon* processes. Using this test, you can determine whether these helper processes are running or not, and if running, whether/not they are performing the checks that they are programmed to perform at pre-configured intervals. This way, you can be proactively alerted to the inadvertent termination of these critical help processes and errors in their operations.

Target of the test : The eG Manager

Agent deploying the test : An internal/remote agent

Outputs of the test : One set of results for the *eGmon* and *eGagentmon* processes.

Configurable parameters for the test

Parameter	Description
Test period	How often should the test be executed .
Host	The host for which the test is to be configured.
Port	The port number at which the specified host listens.
JMX Remote Port	Here, specify the port at which the JMX listens for requests from remote hosts. In the <EG_MANAGER_INSTALL_DIR>\manager directory (on Windows; on Unix, this will be the /opt/egurkha/manager directory) of the eG manager, you will find a management.properties file. Set the port defined against the com.sun.management.jmxremote.port parameter of the file as the JMX Remote Port.
User, Password, and Confirm Password	By default, JMX requires no authentication or security. Therefore, the User, Password , Confirm Password and Confirm Password parameters are set to <i>none</i> by default.
JNDIName	The JNDIName is a lookup name for connecting to the JMX connector. By default, this is <i>jmxrmi</i> . If you have registered the JMX connector in the RMI registry using a different lookup name, then you can change this default value to reflect the same.
JMX Provider	This test uses a JMX Provider to access the MBean attributes of the eG manager and collect metrics. Specify the package name of this JMX Provider here. By default, this is set to com.sun.jmx.remote.protocol .

Parameter	Description
Timeout	Specify the duration (in seconds) for which this test should wait for a response from the eG manager. If there is no response from the eG manager beyond the configured duration, the test will timeout. By default, this is set to 240 seconds.
DD Frequency	Refers to the frequency with which detailed diagnosis measures are to be generated for this test. The default is 1:1 . This indicates that, by default, detailed measures will be generated every time this test runs, and also every time the test detects a problem. You can modify this frequency, if you so desire. Also, if you intend to disable the detailed diagnosis capability for this test, you can do so by specifying none against DD frequency.
Detailed Diagnosis	<p>To make diagnosis more efficient and accurate, the eG Enterprise suite embeds an optional detailed diagnostic capability. With this capability, the eG agents can be configured to run detailed, more elaborate tests as and when specific problems are detected. To enable the detailed diagnosis capability of this test for a particular server, choose the On option. To disable the capability, click on the Off option.</p> <p>The option to selectively enable/disable the detailed diagnosis capability will be available only if the following conditions are fulfilled:</p> <ul style="list-style-type: none"> • The eG manager license should allow the detailed diagnosis capability • Both the normal and abnormal frequencies configured for the detailed diagnosis measures should not be 0.

Measurements made by the test

Measurement	Description	Measurement Unit	Interpretation
Process count	Indicates the number of instances of this process that is currently running.	Number	The value 1 is desired for this measure. Any value above 1 is a sign that more instances of a process are unnecessarily running and draining resources. Use the detailed diagnosis of this measure to know the process ID of the additional processes, so that you can kill them to conserve resources.
Time since last check	Indicates the time (in minutes) that has elapsed since this process last checked the connection to	Mins	Typically, this should be the same as or close to the frequency configured for the check in the eG manager or agent's (as the case may be) configuration

Measurement	Description	Measurement Unit	Interpretation						
	the eG manager or agent (as the case may be)		files. If not, it could indicate that the processes are not functioning as per the configure schedule, and could be a cause for concern.						
Has process restarted ?	Indicates whether/not this process has restarted.		<p>The values that this measure can report and their corresponding numeric values have been listed in the table below:</p> <table border="1"> <thead> <tr> <th>Measure Value</th><th>Numeric Value</th></tr> </thead> <tbody> <tr> <td>Yes</td><td>1</td></tr> <tr> <td>No</td><td>0</td></tr> </tbody> </table> <p>Note: By default, the test reports the Measure Values listed in the table above to indicate whether a function has been set to run as a separate process or not. In the graph of this measure however, the same is represented using the numeric equivalents only.</p>	Measure Value	Numeric Value	Yes	1	No	0
Measure Value	Numeric Value								
Yes	1								
No	0								

2.3.4 eG Agents Test

To receive precise, real-time updates on the performance and overall health of the components being monitored, administrators need to ensure that the eG agents, which perform the actual monitoring functions, are installed in the environment and are running at all times. This test periodically monitors the status of agents to report whether they are installed or not, and if installed, whether/not they are running.

Target of the test : The eG Manager

Agent deploying the test : An internal/remote agent

Outputs of the test : One set of results for the eG manager being monitored.

Configurable parameters for the test

Parameter	Description
Test period	How often should the test be executed .
Host	The host for which the test is to be configured.
Port	The port number at which the specified host listens.
JMX Remote Port	Here, specify the port at which the JMX listens for requests from remote hosts. In the <code><EG_MANAGER_INSTALL_DIR>\manager</code> directory (on Windows; on Unix, this will be the <code>/opt/egurkha/manager</code> directory) of the eG manager, you will find a management.properties file. Set the port defined against the com.sun.management.jmxremote.port parameter of the file as the JMX Remote Port.
User, Password, and Confirm Password	By default, JMX requires no authentication or security. Therefore, the User, Password , and Confirm Password parameters are set to <i>none</i> by default.
JNDIName	The JNDIName is a lookup name for connecting to the JMX connector. By default, this is <i>jmxrmi</i> . If you have registered the JMX connector in the RMI registry using a different lookup name, then you can change this default value to reflect the same.
JMX Provider	This test uses a JMX Provider to access the MBean attributes of the eG manager and collect metrics. Specify the package name of this JMX Provider here. By default, this is set to com.sun.jmx.remote.protocol .
Timeout	Specify the duration (in seconds) for which this test should wait for a response from the eG manager. If there is no response from the eG manager beyond the configured duration, the test will timeout. By default, this is set to 240 seconds.
DD Frequency	Refers to the frequency with which detailed diagnosis measures are to be generated for this test. The default is 1:1 . This indicates that, by default, detailed measures will be generated every time this test runs, and also every time the test detects a problem. You can modify this frequency, if you so desire. Also, if you intend to disable the detailed diagnosis capability for this test, you can do so by specifying <i>none</i> against DD frequency.
Detailed Diagnosis	To make diagnosis more efficient and accurate, the eG Enterprise suite embeds an optional detailed diagnostic capability. With this capability, the eG agents can be configured to run detailed, more elaborate tests as and when specific problems are detected. To enable the detailed diagnosis capability of this test for a particular server, choose the On option. To disable the capability, click on the Off option. The option to selectively enable/disable the detailed diagnosis capability will be available only if the following conditions are fulfilled:

Parameter	Description
	<ul style="list-style-type: none"> The eG manager license should allow the detailed diagnosis capability Both the normal and abnormal frequencies configured for the detailed diagnosis measures should not be 0.

Measurements made by the test

Measurement	Description	Measurement Unit	Interpretation
Total agents	Indicates the total number of agents configured in the eG manager.	Number	
Not running agents	Indicates the number of agents that are not running currently.	Number	<p>An agent that is not running will not be able to collect metrics from the components assigned to it for monitoring. Without metrics, the eG manager will have no basis for determining the state of the related components, and will hence be forced to attach an Unknown state to all components monitored by that agent.</p> <p>Use the detailed diagnosis of this measure to identify the agents that are not currently running.</p>
Not installed agents	Indicates the number of agents that have not been installed.	Number	<p>While actively using the eG Enterprise Suite, you may come across situations where an agent is configured in the eG manager for monitoring one/more components, but the agent software is not physically deployed on a host. The value of this measure is indicative of how many such configured but not installed agents are available in the environment.</p> <p>Such agents again will not be able to extract performance statistics from components. These components will</p>

Measurement	Description	Measurement Unit	Interpretation
			<p>hence assume the Unknown state, until the agent is physically deployed and started.</p> <p>Use the detailed diagnosis of this measure to know which agents are yet to be installed.</p>

The detailed diagnosis of the *Not running agents* measure lists the IP address/nick name of the eG agents that are not running currently.

TIME	AGENT NAME
Feb 21, 2012 06:09:56	192.168.8.26
Feb 21, 2012 05:59:16	192.168.8.26
Feb 21, 2012 03:17:19	eG_Mgr26 Java_Application 192.168.8.26

Figure 2.19: The detailed diagnosis of the Not running agents

The detailed diagnosis of the *Not installed agents* measure lists the IP address/nick name of the eG agents that are not installed currently.

TIME	AGENT NAME
Feb 21, 2012 06:09:56	192.168.8.26
Feb 21, 2012 05:59:16	192.168.8.26
Feb 21, 2012 03:17:19	eG_Mgr26 Java_Application 192.168.8.26

Figure 2.20: The detailed diagnosis of the Not installed agents

2.3.5 eG Manager Error Log Test

The eG manager, upon installation, automatically creates an `error_log` in the `<EG_INSTALL_DIR>\manager\logs` directory to which errors/warnings captured during installation, configuration and control (starting/stopping) of the eG manager, and during critical manager operations such as trending, thresholding, cleanup, and alerting are recorded. By periodically parsing this `error_log` and retrieving the details of error/warning events logged therein, you can understand which activities failed and why. This test helps you do just that.

Target of the test : The eG Manager

Agent deploying the test : An internal/remote agent

Outputs of the test : One set of results for critical eG manager function.

Configurable parameters for the test

Parameter	Description
Test period	How often should the test be executed .
Host	The host for which the test is to be configured.
Port	The port number at which the specified host listens.
AlertFile	<p>Specify the full path to the log file to be monitored. Since the <code>error_log</code> is by default found in the <code><EG_INSTALL_DIR>\manager\logs</code> directory, the same is displayed here by default.</p> <p>Also, instead of a specific log file path, the path to the directory containing the <code>error_log</code> files can be provided - eg., <code>/opt/egurkha/manager/logs</code>. This ensures that eG Enterprise monitors the most recent log files in the specified directory. Specific log file name patterns can also be specified. For example, to monitor the latest log files with names containing the string <code>error_log</code>, the parameter specification can be, <code>/opt/egurkha/manager/*error_log*</code>. Here, <code>**</code> indicates leading/trailing characters (as the case may be). In this case, the eG agent first enumerates all the log files in the specified path that match the given pattern, and then picks only the latest log file from the result set for monitoring.</p>
	<p>Every time this test is executed, the eG agent verifies the following:</p> <ul style="list-style-type: none"> • Whether any changes have occurred in the size and/or timestamp of the log files that were monitoring during the last measurement period; • Whether any new log files (that match the AlertFile specification) have been newly

Parameter	Description
	added since the last measurement period;
	<ul style="list-style-type: none"> • If a few lines have been added to a log file that was monitored previously, then the eG agent monitors the additions to that log file, and then proceeds to monitor newer log files (if any). If an older log file has been overwritten, then, the eG agent monitors this log file completely, and then proceeds to monitor the newer log files (if any).
SearchPattern	<p>Enter the specific patterns of alerts to be monitored. The pattern should be in the following format: <PatternName>:<Pattern>, where <PatternName> is the pattern name that will be displayed in the monitor interface and <Pattern> is an expression of the form - *expr* or expr or *expr or expr*, etc. A leading '*' signifies any number of leading characters, while a trailing '*' signifies any number of trailing characters. Multiple search patterns can be specified as a comma-separated list. If you want all the messages in a log file to be monitored, then your specification would be: <PatternName>:*</p>
	<p>By default, this test monitors error and warning events logged in the error_log file. Therefore, the default SearchPattern is set as: <code>error:/*ERROR*,warn:/*WARN*</code>. This indicates that by default, the test will monitor only those lines in the <code>error_log</code> which embed the strings <code>ERROR</code> and <code>WARN</code>.</p>
Lines	<p>Specify two numbers in the format x:y. This means that when a line in the alert file matches a particular pattern, then x lines before the matched line and y lines after the matched line will be reported in the detail diagnosis output (in addition to the matched line). The default value here is 0:0. Multiple entries can be provided as a comma-separated list.</p>
	<p>If you give 1:1 as the value for Lines, then this value will be applied to all the patterns specified in the SearchPattern field. If you give 0:0,1:1,2:1 as the value for Lines and if the corresponding value in the SearchPattern field is like <code>ORA:ORA-*</code>, <code>offline:/*offline*</code>, <code>online:/*online*</code> then:</p>
	<p>0:0 will be applied to <code>ORA:ORA-*</code> pattern</p>
	<p>1:1 will be applied to <code>offline:/*offline*</code> pattern</p>
	<p>2:1 will be applied to <code>online:/*online*</code> pattern</p>
ExcludePattern	<p>Provide a comma-separated list of patterns to be excluded from monitoring in the ExcludePattern text box. For example <code>*critical*</code>, <code>*exception*</code>. By default, this parameter is set to 'none'.</p>
UniqueMatch	<p>By default, the UniqueMatch parameter is set to False, indicating that, by default, the test checks every line in the log file for the existence of each of the configured</p>

Parameter	Description
	<p>SearchPattern. By setting this parameter to True, you can instruct the test to ignore a line and move to the next as soon as a match for one of the configured patterns is found in that line. For example, assume that <code>Pattern1: *fatal*, Pattern2: *error*</code> is the SearchPattern that has been configured. If UniqueMatch is set to False, then the test will read every line in the log file completely to check for the existence of messages embedding the strings 'fatal' and 'error'. If both the patterns are detected in the same line, then the number of matches will be incremented by 2. On the other hand, if UniqueMatch is set to True, then the test will read a line only until a match for one of the configured patterns is found and not both. This means that even if the strings 'fatal' and 'error' follow one another in the same line, the test will consider only the first match and not the next. The match count in this case will therefore be incremented by only 1.</p>
RotatingFile	<p>This flag governs the display of descriptors for this test in the eG monitoring console. This flag is set to False by default. In this case, the descriptors of the test will be of the following format: <code><Alert_file_name>:<SearchPattern></code>.</p> <p>If this flag is set to True and the AlertFile text box contains the full path to a specific (log/text) file, then, the descriptors of this test will be displayed in the following format: <code>DirectoryContainingMonitoredFile:<SearchPattern></code>. Since the alertfile parameter is set to <code>/manager/logs/error_log</code> by default in the case of this test, setting the rotatingfile to true will display descriptors in the following format in the eG monitoring console: <code>/manager/logs/error_log:<SearchPattern></code>.</p> <p>On the other hand, if this flag is set to True and the AlertFile parameter is set to the directory containing log files (say, <code>/manager/logs</code>), then, the descriptors of this test will be displayed in the format: <code>ConfiguredDirectoryPath:<SearchPattern></code> - i.e., <code>/manager/logs:<SearchPattern></code>. On the other hand, if the RotatingFile parameter had been set to false, then the descriptors will be of the following format: <code>ConfiguredDirectory:<SearchPattern></code> - i.e., <code>logs:<SearchPattern></code> in the case of the example above.</p> <p>If this flag is set to True and the AlertFile parameter is set to a specific file pattern, then, the descriptors of this test will be of the following format: <code><FilePattern>:<SearchPattern>. /opt/egurkha/manager/*error_log*</code>, and rotatingfile is set to True, then, your descriptor will be: <code>*error_log*:<SearchPattern></code>. In this case, the descriptor format will not change even if the RotatingFile flag status is changed .</p>
CaseSensitive	<p>This flag is set to No by default. This indicates that the test functions in a 'case-insensitive' manner by default. This implies that, by default, the test ignores the case of your AlertFile and SearchPattern specifications. If this flag is set to Yes on the other hand, then the test will function in a 'case-sensitive' manner. In this case therefore, for</p>

Parameter	Description
	the test to work, even the case of your AlertFile and SearchPattern specifications should match with the actual.
OverwrittenFile	<p>By default, this flag is set to False. Set this flag to true if you want the test to support the 'roll over' capability of the specified AlertFile. A roll over typically occurs when the timestamp of a file changes or when the log file size crosses a pre-determined threshold. When a log file rolls over, the errors/warnings that pre-exist in that file will be automatically copied to a new file, and all errors/warnings that are captured subsequently will be logged in the original/old file. For instance, say, errors and warnings were originally logged to a file named <code>error_log</code>. When a roll over occurs, the content of the file <code>error_log</code> will be copied to a file named <code>error_log.1</code>, and all new errors/warnings will be logged in <code>error_log</code>. In such a scenario, since the <code>overwrittenfile</code> flag is set to false by default, the test by default scans only <code>error_log.1</code> for new log entries and ignores <code>error_log</code>. On the other hand, if the flag is set to true, then the test will scan both <code>error_log</code> and <code>error_log.1</code> for new entries.</p>
	<p>If you want this test to support the 'roll over' capability described above, the following conditions need to be fulfilled:</p> <ul style="list-style-type: none"> • The AlertFile parameter has to be configured only with the name and/or path of one/more alert files. File patterns or directory specifications should not be specified in the AlertFile text box. • The roll over file name should be of the format: "<code><AlertFile>.1</code>", and this file must be in the same directory as the AlertFile.
DD Frequency	<p>Refers to the frequency with which detailed diagnosis measures are to be generated for this test. The default is <code>1:1</code>. This indicates that, by default, detailed measures will be generated every time this test runs, and also every time the test detects a problem. You can modify this frequency, if you so desire. Also, if you intend to disable the detailed diagnosis capability for this test, you can do so by specifying <code>none</code> against DD frequency.</p>
Detailed Diagnosis	<p>To make diagnosis more efficient and accurate, the eG Enterprise suite embeds an optional detailed diagnostic capability. With this capability, the eG agents can be configured to run detailed, more elaborate tests as and when specific problems are detected. To enable the detailed diagnosis capability of this test for a particular server, choose the On option. To disable the capability, click on the Off option.</p>
	<p>The option to selectively enable/disable the detailed diagnosis capability will be available only if the following conditions are fulfilled:</p> <ul style="list-style-type: none"> • The eG manager license should allow the detailed diagnosis capability

Parameter	Description
	<ul style="list-style-type: none"> Both the normal and abnormal frequencies configured for the detailed diagnosis measures should not be 0.

Measurements made by the test

Measurement	Description	Measurement Unit	Interpretation
Recent messages	Indicates the number of messages matching the specified searchpattern that were recently logged in the specified alertfile.	Number	The detailed diagnosis of this measure sheds light on the nature of errors/warnings that occurred when installing, configuring, or starting the eG manager.

The detailed diagnosis of the *Recent messages* measure provides detailed descriptions related to the error/warning events that occurred on the eG manager when installing/configuring/starting it. This way, you can easily troubleshoot issues.

TIME	MESSAGES
Feb 21, 2012 15:14:14	21/02/2012 15:10:14 ERROR ConnectionPool java.sql.SQLException: Listener refused the connection with the following error:
Feb 21, 2012 14:54:23	21/02/2012 14:49:34 ERROR ConnectionPool Failed to get connection - free connections 0 used connections 4 21/02/2012 14:49:44 ERROR ConnectionPool Failed to get connection - free connections 0 used connections 4 21/02/2012 14:49:48 ERROR ConnectionPool Failed to get connection - free connections 0 used connections 4 21/02/2012 14:49:54 ERROR ConnectionPool java.sql.SQLException: IO Error: The Network Adapter could not establish the connection 21/02/2012 14:49:57 ERROR ConnectionPool Failed to get connection - free connections 0 used connections 4 21/02/2012 14:49:57 ERROR EgMailManager Failed to get Connection from the pool! Invalid Connection! 21/02/2012 14:50:05 ERROR ConnectionPool Failed to get connection - free connections 0 used connections 4 21/02/2012 14:50:15 ERROR ConnectionPool Failed to get connection - free connections 2 used connections 4

Figure 2.21: The detailed diagnosis of the Recent messages measure

2.3.6 eG Object Pools Test

The eG manager uses four object pools to manage database connections of each of the modules it supports. These object pools are as follows - DB Adapter Admin, DB Adapter Monitor, DB Adapter Config, and DB Adapter Reporter. If any of these pools run out of objects, then the eG manager will not be able to establish database connections and will eventually crash! To make sure that all the object pools are adequately sized, use this test and track the usage of each object pool, isolate the pools that do not have sufficient objects, and resize them.

Target of the test : The eG Manager

Agent deploying the test : An internal/remote agent

Outputs of the test : One set of results for each object pool of the eG manager.

Configurable parameters for the test

Parameter	Description
Test period	How often should the test be executed .
Host	The host for which the test is to be configured.
Port	The port number at which the specified host listens.
JMX Remote Port	Here, specify the port at which the JMX listens for requests from remote hosts. In the <code><EG_MANAGER_INSTALL_DIR>\manager</code> directory (on Windows; on Unix, this will be the <code>/opt/egurkha/manager</code> directory) of the eG manager, you will find a management.properties file. Set the port defined against the com.sun.management.jmxremote.port parameter of the file as the JMX Remote Port.
User, Password, and Confirm Password	By default, JMX requires no authentication or security. Therefore, the User, Password , and Confirm Password parameters are set to <i>none</i> by default.
JNDIName	The JNDIName is a lookup name for connecting to the JMX connector. By default, this is <i>jmxrmi</i> . If you have registered the JMX connector in the RMI registry using a different lookup name, then you can change this default value to reflect the same.
JMX Provider	This test uses a JMX Provider to access the MBean attributes of the eG manager and collect metrics. Specify the package name of this JMX Provider here. By default, this is set to com.sun.jmx.remote.protocol .
Timeout	Specify the duration (in seconds) for which this test should wait for a response from the eG manager. If there is no response from the eG manager beyond the configured duration, the test will timeout. By default, this is set to 240 seconds.

Measurements made by the test

Measurement	Description	Measurement Unit	Interpretation
Initial objects	Indicates the number of objects initially allocated to this pool.	Number	
Maximum objects	Indicates the maximum number of objects this pool can contain.	Number	
Used objects	Indicates the objects that are currently used in this pool.	Number	If the value of this measure grows dangerously close to the value of the Maximum objects measure, it indicates that the pool is rapidly running out of objects.
Free objects	Indicates the number of unused objects in this pool.	Number	A low value for this measure is a cause for concern, as it indicates that the object pool does not have enough free objects. This could be owing to an increase in the number of components monitored or the number of users accessing the systems. You may hence want to consider resizing the pool, so that the availability of the eG manager is not affected by the lack of adequate objects.
Object timeout	Indicates the time taken by the object to timeout.	Secs	By carefully observing the value for this measure over time, you can figure out the maximum ideal time for which an object should stay alive.
Total objects	Indicates the total number of objects in this pool.	Number	

2.3.7 eG Servlets Test

Java servlets are the building blocks of the eG Enterprise system. These servlets are used by the eG manager to receive and respond to Web clients across HTTP. The poor responsiveness of one/more servlets can hence significantly impact the performance of the eG manager. Therefore, if

administrators notice a slowdown with the eG manager, they can use this test to know if any servlet has contributed to the delay and if so, which one.

Target of the test : The eG Manager

Agent deploying the test : An internal/remote agent

Outputs of the test : One set of results for each servlet on the eG manager.

Configurable parameters for the test

Parameter	Description
Test period	How often should the test be executed .
Host	The host for which the test is to be configured.
Port	The port number at which the specified host listens.
JMX Remote Port	Here, specify the port at which the JMX listens for requests from remote hosts. In the <EG_MANAGER_INSTALL_DIR>\manager directory (on Windows; on Unix, this will be the /opt/egurkha/manager directory) of the eG manager, you will find a management.properties file. Set the port defined against the com.sun.management.jmxremote.port parameter of the file as the JMX Remote Port.
User, Password, and Confirm Password	By default, JMX requires no authentication or security. Therefore, the User, Password , and Confirm Password parameters are set to <i>none</i> by default.
JNDIName	The JNDIName is a lookup name for connecting to the JMX connector. By default, this is <i>jmxrmi</i> . If you have registered the JMX connector in the RMI registry using a different lookup name, then you can change this default value to reflect the same.
JMX Provider	This test uses a JMX Provider to access the MBean attributes of the eG manager and collect metrics. Specify the package name of this JMX Provider here. By default, this is set to com.sun.jmx.remote.protocol .
Timeout	Specify the duration (in seconds) for which this test should wait for a response from the eG manager. If there is no response from the eG manager beyond the configured duration, the test will timeout. By default, this is set to 240 seconds.

Measurements made by the test

Measurement	Description	Measurement Unit	Interpretation
Requests	Indicates the number of	Number	This is a good indicator of the load on

Measurement	Description	Measurement Unit	Interpretation
	requests handled by this servlet.		the servlet.
Average response time	Indicates the time taken by this servlet to respond to requests.	Secs	A high value is indicative of the poor responsiveness of a servlet. Compare the value of this measure across servlets to identify the least responsive servlet.
Insert queries	Indicates the number of insert queries that were executed by this servlet during the last measurement period.	Number	
Average insert time	Indicates the time taken by this servlet to execute these insert queries during the last measurement period.	Secs	A high value could be cause for concern.

2.3.8 State manager process

The **State manager process** is responsible for computing the current state of layers, tests, measures, and infrastructure elements (such as components, services, segments, zones, etc.), based on the metrics reported by the eG agent. Also, if agents are not able to run tests or report metrics, it is the responsibility of the **State manager process** to change the state of the 'entity' to **Unknown** and send Unknown mail alerts, if configured. This test indicates whether/not the state manager process is overloaded by reporting how busy it is and its current queue size.

Target of the test : The eG Manager

Agent deploying the test : An internal/remote agent

Outputs of the test : One set of results for the eG manager being monitored.

Configurable parameters for the test

Parameter	Description
Test period	How often should the test be executed .

Parameter	Description
Host	The host for which the test is to be configured.
Port	The port number at which the specified host listens.
JMX Remote Port	Here, specify the port at which the JMX listens for requests from remote hosts. In the <EG_MANAGER_INSTALL_DIR>\manager directory (on Windows; on Unix, this will be the /opt/egurkha/manager directory) of the eG manager, you will find a management.properties file. Set the port defined against the com.sun.management.jmxremote.port parameter of the file as the JMX Remote Port.
User, Password, and Confirm Password	By default, JMX requires no authentication or security. Therefore, the User, Password, and Confirm Password parameters are set to <i>none</i> by default.
JNDIName	The JNDIName is a lookup name for connecting to the JMX connector. By default, this is <i>jmxrmi</i> . If you have registered the JMX connector in the RMI registry using a different lookup name, then you can change this default value to reflect the same.
JMX Provider	This test uses a JMX Provider to access the MBean attributes of the eG manager and collect metrics. Specify the package name of this JMX Provider here. By default, this is set to com.sun.jmx.remote.protocol .
Timeout	Specify the duration (in seconds) for which this test should wait for a response from the eG manager. If there is no response from the eG manager beyond the configured duration, the test will timeout. By default, this is set to 240 seconds.

Measurements made by the test

Measurement	Description	Measurement Unit	Interpretation
Statemanager queue	Indicates the current queue size of the state manager process.	Number	A high value indicates that too many requests to the state manager are pending processing. A gradual, but consistent increase in the value of this measure could indicate a processing bottleneck.
Statemanager busy	Indicates how busy the	Percent	A value close to 100% indicates

Measurement	Description	Measurement Unit	Interpretation
percent	state manager is currently.		that the state manager is too busy now, and may not have the bandwidth to attend to subsequent state requests. If the value of this measure remains high or consistently climbs up, it indicates that the state manager process is being overloaded.

2.3.9 eG Threshold Log

You can closely track the status of the threshold computation process by enabling logging for that process using the **MANAGER SETTINGS** page (Configure -> Manager Settings menu sequence) in the eG administrative interface. This will result in the creation of the **thresh_log** file (in the `<eg_install_dir>\manager\logs` directory), to which the status and errors pertaining to the threshold-related activities will be logged as and when they occur.

This test monitors the **thresh_log** for errors and provides the complete details of these errors to simplify troubleshooting.

Target of the test : The eG Manager

Agent deploying the test : An internal/remote agent

Outputs of the test : One set of results for critical eG manager function.

Configurable parameters for the test

Parameter	Description
Test period	How often should the test be executed .
Host	The host for which the test is to be configured.
Port	The port number at which the specified host listens.
AlertFile	Specify the full path to the log file to be monitored. Since the thresh_log is by default found in the <code><EG_INSTALL_DIR>\manager\logs</code> directory, the same is displayed here by default.

Also, instead of a specific log file path, the path to the directory containing the **thresh_**

Parameter	Description
	<p>log files can be provided - eg., <code>/opt/egurkha/manager/logs</code>. This ensures that eG Enterprise monitors the most recent log files in the specified directory. Specific log file name patterns can also be specified. For example, to monitor the latest log files with names containing the string <code>thresh_log</code>, the parameter specification can be, <code>/opt/egurkha/manager/*thresh_log*</code>. Here, '*' indicates leading/trailing characters (as the case may be). In this case, the eG agent first enumerates all the log files in the specified path that match the given pattern, and then picks only the latest log file from the result set for monitoring.</p> <p>Every time this test is executed, the eG agent verifies the following:</p> <ul style="list-style-type: none"> • Whether any changes have occurred in the size and/or timestamp of the log files that were monitoring during the last measurement period; • Whether any new log files (that match the AlertFile specification) have been newly added since the last measurement period; • If a few lines have been added to a log file that was monitored previously, then the eG agent monitors the additions to that log file, and then proceeds to monitor newer log files (if any). If an older log file has been overwritten, then, the eG agent monitors this log file completely, and then proceeds to monitor the newer log files (if any).
SearchPattern	<p>Enter the specific patterns of alerts to be monitored. The pattern should be in the following format: <code><PatternName>:<Pattern></code>, where <code><PatternName></code> is the pattern name that will be displayed in the monitor interface and <code><Pattern></code> is an expression of the form - <code>*expr* or expr or *expr or expr*</code>, etc. A leading '*' signifies any number of leading characters, while a trailing '**' signifies any number of trailing characters.</p> <p>Multiple search patterns can be specified as a comma-separated list. If you want all the messages in a log file to be monitored, then your specification would be:</p> <p><code><PatternName>:*</code>.</p> <p>By default, this test monitors error and warning events logged in the <code>thresh_log</code> file. Therefore, the default SearchPattern is set as: <code>error:*ERROR*,warn:*WARN*</code>. This indicates that by default, the test will monitor only those lines in the <code>thresh_log</code> which embed the strings <code>ERROR</code> and <code>WARN</code>.</p>
Lines	<p>Specify two numbers in the format <code>x:y</code>. This means that when a line in the alert file matches a particular pattern, then <code>x</code> lines before the matched line and <code>y</code> lines after the matched line will be reported in the detail diagnosis output (in addition to the matched line). The default value here is <code>0:0</code>. Multiple entries can be provided as a comma-separated list.</p>

Parameter	Description
	<p>If you give 1:1 as the value for Lines, then this value will be applied to all the patterns specified in the SearchPattern field. If you give 0:0,1:1,2:1 as the value for Lines and if the corresponding value in the SearchPattern field is like ORA:ORA-*<i>,offline</i>:*<i>offline</i>*,<i>online</i>:*<i>online</i> then:</p> <p>0:0 will be applied to ORA:ORA-* pattern</p> <p>1:1 will be applied to offline:*\i offline* pattern</p> <p>2:1 will be applied to online:*\i online pattern</p>
ExcludePattern	Provide a comma-separated list of patterns to be excluded from monitoring in the ExcludePattern text box. For example *critical*, *exception*. By default, this parameter is set to 'none'.
UniqueMatch	By default, the UniqueMatch parameter is set to False , indicating that, by default, the test checks every line in the log file for the existence of each of the configured SearchPattern. By setting this parameter to True , you can instruct the test to ignore a line and move to the next as soon as a match for one of the configured patterns is found in that line. For example, assume that Pattern1: *fatal*, Pattern2: *error* is the SearchPattern that has been configured. If UniqueMatch is set to False , then the test will read every line in the log file completely to check for the existence of messages embedding the strings 'fatal' and 'error'. If both the patterns are detected in the same line, then the number of matches will be incremented by 2. On the other hand, if UniqueMatch is set to True , then the test will read a line only until a match for one of the configured patterns is found and not both. This means that even if the strings 'fatal' and 'error' follow one another in the same line, the test will consider only the first match and not the next. The match count in this case will therefore be incremented by only 1.
RotatingFile	<p>This flag governs the display of descriptors for this test in the eG monitoring console. This flag is set to False by default. In this case, the descriptors of the test will be of the following format: <Alert_file_name>:<SearchPattern>.</p> <p>If this flag is set to True and the AlertFile text box contains the full path to a specific (log/text) file, then, the descriptors of this test will be displayed in the following format: <i>Directory containing monitored file</i>:<SearchPattern>. Since the alertfile parameter is set to /manager/logs/thresh_log by default in the case of this test, setting the rotatingfile to true will display descriptors in the following format in the eG monitoring console: <i>/manager/logs/thresh_log</i>:<SearchPattern>.</p> <p>On the other hand, if this flag is set to True and the AlertFile parameter is set to the directory containing log files (say, /manager/logs), then, the descriptors of this test will be displayed in the format: <i>Configured_directory_path</i>:<SearchPattern> - i.e., <i>/manager/logs</i>:<SearchPattern>. On the other hand, if the RotatingFile parameter</p>

Parameter	Description
	had been set to false, then the descriptors will be of the following format: Configured_directory:<SearchPattern> - i.e., logs:<SearchPattern> in the case of the example above.
	If this flag is set to True and the AlertFile parameter is set to a specific file pattern, then, the descriptors of this test will be of the following format: <FilePattern>:<SearchPattern>. /opt/egurkha/manager/*thresh_log*, and rotatingfile is set to True , then, your descriptor will be: *thresh_log*<SearchPattern>. In this case, the descriptor format will not change even if the RotatingFile flag status is changed .
CaseSensitive	This flag is set to No by default. This indicates that the test functions in a 'case-insensitive' manner by default. This implies that, by default, the test ignores the case of your AlertFile and SearchPattern specifications. If this flag is set to Yes on the other hand, then the test will function in a 'case-sensitive' manner. In this case therefore, for the test to work, even the case of your AlertFile and SearchPattern specifications should match with the actual.
OverwrittenFile	<p>By default, this flag is set to False. Set this flag to true if you want the test to support the 'roll over' capability of the specified AlertFile. A roll over typically occurs when the timestamp of a file changes or when the log file size crosses a pre-determined threshold. When a log file rolls over, the errors/warnings that pre-exist in that file will be automatically copied to a new file, and all errors/warnings that are captured subsequently will be logged in the original/old file. For instance, say, errors and warnings were originally logged to a file named thresh_log. When a roll over occurs, the content of the file thresh_log will be copied to a file named thresh_log.1, and all new errors/warnings will be logged thresh_log. In such a scenario, since the overwrittenfile flag is set to false by default, the test by default scans only thresh_log.1 for new log entries and ignores thresh_log. On the other hand, if the flag is set to true, then the test will scan both thresh_log and thresh_log.1 for new entries.</p> <p>If you want this test to support the 'roll over' capability described above, the following conditions need to be fulfilled:</p> <ul style="list-style-type: none"> • The AlertFile parameter has to be configured only with the name and/or path of one/more alert files. File patterns or directory specifications should not be specified in the AlertFile text box. • The roll over file name should be of the format: "<AlertFile>.1", and this file must be in the same directory as the AlertFile.
DD Frequency	Refers to the frequency with which detailed diagnosis measures are to be generated for

Parameter	Description
	<p>this test. The default is 1:1. This indicates that, by default, detailed measures will be generated every time this test runs, and also every time the test detects a problem. You can modify this frequency, if you so desire. Also, if you intend to disable the detailed diagnosis capability for this test, you can do so by specifying <i>none</i> against DD frequency.</p>
Detailed Diagnosis	<p>To make diagnosis more efficient and accurate, the eG Enterprise suite embeds an optional detailed diagnostic capability. With this capability, the eG agents can be configured to run detailed, more elaborate tests as and when specific problems are detected. To enable the detailed diagnosis capability of this test for a particular server, choose the On option. To disable the capability, click on the Off option.</p> <p>The option to selectively enable/disable the detailed diagnosis capability will be available only if the following conditions are fulfilled:</p> <ul style="list-style-type: none"> • The eG manager license should allow the detailed diagnosis capability • Both the normal and abnormal frequencies configured for the detailed diagnosis measures should not be 0.

Measurements made by the test

Measurement	Description	Measurement Unit	Interpretation
Recent messages	Indicates the number of messages matching the specified searchpattern that were recently logged in the specified alertfile.	Number	The detailed diagnosis of this measure sheds light on the nature of errors that occurred when thresholds were computed.

The detailed diagnosis of the *Recent messages* measure provides detailed descriptions related to the error events that occurred on the eG manager when thresholds were computed. This way, you can easily troubleshoot thresholding-related issues.

The screenshot shows the 'Detailed Diagnosis' interface of the eG Manager. The 'Measure Graph' tab is selected. The 'Test' is 'eG Threshold Log' and the 'Description' is 'thresh_log:error'. The 'Timeline' is set to '4 days' from 'Feb 17, 2012' to 'Feb 21, 2012'. The 'Measurement' is 'Recent messages'. The results table shows a single row of log messages from 'Feb 21, 2012 13:39:14' to 'Feb 21, 2012 13:39:14'. The log entries are as follows:

TIME	MESSAGES
Feb 21, 2012 13:39:14	21/02/2012 13:39:14 INFO EgThresholdManager Start threshold for EgErrorLogTest 21/02/2012 13:39:14 INFO EgThresholdManager addToMetaTestTable for EgErrorLogTest is false 21/02/2012 13:39:14 INFO EgThresholdManager computeThresholdForTest EgErrorLogTest 1329807600000 1329811200000 21/02/2012 13:39:14 INFO EgThresholdManager computeThresholdForTest2 EgErrorLogTest 1329807600000 1329811200000 1329811200000 21/02/2012 13:39:14 INFO EgThresholdManager computeThresholdForTest3 EgErrorLogTest 1329807600000 1329811200000 1329811200000 21/02/2012 13:39:14 INFO EgThresholdManager Finding unique for EgErrorLogTest 21/02/2012 13:39:14 INFO EgThresholdManager Query is SELECT TRGT_HOST,PORT_NO,SITE_NAME,INFO,MSMT_HOST FROM MEASURE_LAST WHERE TEST_NAME= 'EgErrorLogTest' AND MSMT_TIME > to_date('19/02/2012 13:30:00', 'DD/MM/YYYY HH24:MI:SS') 21/02/2012 13:39:14 INFO EgThresholdManager Executed query: SELECT TRGT_HOST,PORT_NO,SITE_NAME,INFO,MSMT_HOST FROM MEASURE_LAST WHERE TEST_NAME= 'EgErrorLogTest' AND MSMT_TIME > to_date('19/02/2012 13:30:00', 'DD/MM/YYYY HH24:MI:SS') 21/02/2012 13:39:14 INFO EgThresholdManager Outputs from selectDistincts EgErrorLogTest is 2 21/02/2012 13:39:14 INFO EgThresholdManager Ending unique for EgErrorLogTest 2 21/02/2012 13:39:14 INFO EgThresholdManager computeThresholdForTest4 EgErrorLogTest 1329807600000 1329811200000 21/02/2012 13:39:14 INFO EgThresholdManager Targets for EgErrorLogTest are: 2 21/02/2012 13:39:14 INFO EgThresholdManager Targets for EgErrorLogTest are: 2

Figure 2.22: The detailed diagnosis of the Recent messages measure reported by the eG Threshold Log Test

2.3.10 Threshold manager process Test

The **Threshold manager process** computes the thresholds - i.e., the upper/limits of performance - for every measure collected by the eG agent and stores the thresholds so computed in the eG database. Since thresholds govern the state of a measure, if the threshold manager process fails to compute thresholds or computes them slowly or fails to even run, it can grossly impair the eG monitoring solution's ability to promptly detect problem areas. Using this test, you can understand how efficient the threshold manager process is. The test reports the current status of this process, points you to threshold computation failures and where they occurred, and reveals slowdowns in threshold computation (if any).

Target of the test : The eG Manager

Agent deploying the test : An internal/remote agent

Outputs of the test : One set of results for the eG manager being monitored.

Configurable parameters for the test

Parameter	Description
Test period	How often should the test be executed .
Host	The host for which the test is to be configured.
Port	The port number at which the specified host listens.
JMX Remote Port	Here, specify the port at which the JMX listens for requests from remote hosts. In the <EG_MANAGER_INSTALL_DIR>\manager directory (on Windows; on Unix, this will be the /opt/egurkha/manager directory) of the eG manager, you will find a management.properties file. Set the port defined against the com.sun.management.jmxremote.port parameter of the file as the JMX Remote Port.
User, Password, and Confirm Password	By default, JMX requires no authentication or security. Therefore, the User, Password , and Confirm Password parameters are set to <i>none</i> by default.
JNDIName	The JNDIName is a lookup name for connecting to the JMX connector. By default, this is <i>jmxrmi</i> . If you have registered the JMX connector in the RMI registry using a different lookup name, then you can change this default value to reflect the same.
JMX Provider	This test uses a JMX Provider to access the MBean attributes of the eG manager and collect metrics. Specify the package name of this JMX Provider here. By default, this is set to com.sun.jmx.remote.protocol .
Timeout	Specify the duration (in seconds) for which this test should wait for a response from the eG manager. If there is no response from the eG manager beyond the configured duration, the test will timeout. By default, this is set to 240 seconds.
Threshold Duration of Test	This test reports a <i>Successful threshold tests</i> measure, which indicates the number of tests for which the threshold manager successfully computed thresholds. The detailed diagnosis of this measure, if enabled, will by default list only the top-10 successful threshold tests, arranged in the descending order of the time taken by the threshold manager to compute thresholds on them. To arrive at this top-10 list, the test considers only those successful tests for which the threshold manager took more than 1 minute (by default) for threshold computation. This is why, the Threshold Duration of Test parameter is set to 1 (minute) by default. This default setting can be overridden by specifying a

Parameter	Description
	duration (in minutes) of your choice in the Threshold Duration of Test text box. For instance, if you specify 5 here, then, the detailed diagnosis will list the top-10 (by default) successful threshold tests for which the threshold manager took more than 5 minutes for threshold computation.
Top Time Taken Test	As already mentioned, the detailed diagnosis of the <i>Successful threshold tests</i> measure, by default, lists the top-10 successful threshold tests, arranged in the descending order of the time taken by the threshold manager to compute thresholds on them. This is why, the top time taken test is set to 10 by default. To view more or a less number of successful threshold tests in the detailed diagnosis, specify a different value in the Top Time Taken Test text box. For instance, if 20 is specified here, then the detailed diagnosis will list the top-20 successful threshold tests.
Detailed Diagnosis	<p>To make diagnosis more efficient and accurate, the eG Enterprise suite embeds an optional detailed diagnostic capability. With this capability, the eG agents can be configured to run detailed, more elaborate tests as and when specific problems are detected. To enable the detailed diagnosis capability of this test for a particular server, choose the On option. To disable the capability, click on the Off option.</p> <p>The option to selectively enable/disable the detailed diagnosis capability will be available only if the following conditions are fulfilled:</p> <ul style="list-style-type: none"> • The eG manager license should allow the detailed diagnosis capability • Both the normal and abnormal frequencies configured for the detailed diagnosis measures should not be 0.

Measurements made by the test

Measurement	Description	Measurement Unit	Interpretation
Thresholding status	Indicates the current status of the threshold manager process.		The values that this measure reports and the numeric values that correspond to them have been discussed in the table below:

Measurement	Description	Measurement Unit	Interpretation								
			<table border="1"> <thead> <tr> <th>Measure Value</th><th>Numeric Value</th></tr> </thead> <tbody> <tr> <td>Running</td><td>0</td></tr> <tr> <td>Done</td><td>1</td></tr> <tr> <td>Error</td><td>2</td></tr> </tbody> </table>	Measure Value	Numeric Value	Running	0	Done	1	Error	2
Measure Value	Numeric Value										
Running	0										
Done	1										
Error	2										
			<p>Note:</p> <p>By default, this measure reports the Measure Values listed in the table above to indicate the current status of the threshold manager process. The graph of this measure however, represents the same using the numeric equivalents only.</p>								
Time taken for thresholding	Indicates the total time taken by the threshold manager to compute thresholds.	Minutes	Ideally, the value of this measure should be low. A steady rise in this measure value is a cause for concern, as it indicates that the threshold manager is taking too long to compute thresholds. This can happen if the threshold manager needs to compute thresholds for too many tests, measures, and descriptors.								
Successful threshold tests	Indicates the number of tests for which thresholds were computed successfully.	Number	You can use the detailed diagnosis of this measure to know the tests for which thresholds have been successfully computed.								
	Failed threshold tests: Indicates the number of tests for which threshold computation failed.	Number	The value 0 is desired for this measure. Any non-zero value is indicative of a thresholding failure. In this case, you can use the detailed diagnosis of this measure to identify those tests for which								

Measurement	Description	Measurement Unit	Interpretation
			threshold computation failed and investigate the reason why. Without thresholds, the monitoring solution cannot detect problem conditions; nor can it compute state.
Time since last completion	Indicates the elapsed time since the last threshold computation.	Minutes	Typically, thresholding is scheduled to take place at the end of every day. By carefully observing the values reported by this measure, you can easily find out when a scheduled threshold computation cycle was missed.
Is threshold running as a separate process?	Indicates whether/not the threshold manager is running as a separate process.		<p>The eG manager runs as a Java process. The maximum heap memory that can be allocated to a 32-bit eG manager process is limited to 1.5 GB. The maximum heap memory allocation to a 64-bit eG manager process on the other hand, is limited to 3 GB.</p> <p>Even if the physical server on which the eG manager is installed has more memory, since it is a single Java process, the eG manager cannot exploit the additional memory available on the server. To overcome this limitation, in eG Enterprise, the critical eG manager functions such as email alert management, threshold computation, trending, and database cleanup activities can all be run as separate Java processes (i.e., in addition to the core eG</p>

Measurement	Description	Measurement Unit	Interpretation						
			<p>manager process).</p> <p>Removing these key functions from the core eG manager process makes additional memory available for the core eG manager functions including data reception and analysis, alarm correlation, and web-based access and reporting. This reconfiguration of the eG manager into separate Java processes allows the eG manager to make better utilization of available server hardware resources and thereby offers enhanced scalability. In turn, this allows customers to get more leverage from their existing investment in the hardware that hosts the eG manager.</p> <p>If cleanup has been configured to run as a separate Java process, then the value of this measure will be Yes. If not, then this measure reports the value No.</p> <p>The numeric values that correspond to the measure values above are as follows:</p> <table border="1" data-bbox="1019 1541 1370 1721"> <thead> <tr> <th>Measure Value</th><th>Numeric Value</th></tr> </thead> <tbody> <tr> <td>Yes</td><td>1</td></tr> <tr> <td>No</td><td>0</td></tr> </tbody> </table> <p>Note:</p> <p>By default, this measure reports the</p>	Measure Value	Numeric Value	Yes	1	No	0
Measure Value	Numeric Value								
Yes	1								
No	0								

Measurement	Description	Measurement Unit	Interpretation
			Measure Values listed in the table above to indicate whether/not cleanup runs as a separate Java process. The graph of this measure however, represents the same using the numeric equivalents only.
Slow tests threshold	Indicates the number of tests for which threshold computation was slow.	Number	Use the detailed diagnosis of this measure to know for which tests threshold computation was slow.

The detailed diagnosis of the *Failed threshold tests* measure lists all the tests on which threshold computation failed and briefly describes the reason for the failure.

TIME	TEST NAME	FAILURE DETAILS
Feb 21, 2012 05:26:31	DiskActivityTest	Error in findUniqueTargets
	EgAgentInfoTest	Error in findUniqueTargets
	EgCleanupTest	Error in findUniqueTargets
	EgConnectionPoolTest	Error in findUniqueTargets
	EgDBTablesInfoTest	Error in findUniqueTargets
	EgErrorLogTest	Error in findUniqueTargets
	EgObjectPoolTest	Error in findUniqueTargets
	EgServletInfoTest	Error in findUniqueTargets
	EgStateManagerInfoTest	Error in findUniqueTargets
	EgThreshLogTest	Error in findUniqueTargets
	EgThresholdManagerTest	Error in findUniqueTargets
	EgTrendLogTest	Error in findUniqueTargets
	EgTrendManagerTest	Error in findUniqueTargets
	EgUserInfoTest	Error in findUniqueTargets
	EgUserSessionTest	Error in findUniqueTargets
	HttpTest	Error in findUniqueTargets
	JmxConnectorTest	Error in findUniqueTargets
	JvmClassInfoTest	Error in findUniqueTargets
	JvmCpuTest	Error in findUniqueTargets

Figure 2.23: The detailed diagnosis of the Failed threshold tests measure

2.3.11 eG Trend Log Test

You can closely track the status of the trend computation process by enabling logging for that process using the **MANAGER SETTINGS** page (Configure -> Manager Settings menu sequence) in the eG administrative interface. This will result in the creation of the **trend_log** file (in the <EG_INSTALL_DOR>\manager\logs directory), to which the status and errors pertaining to the trend-related activities will be logged as and when they occur.

This test monitors the **trend_log** for errors and provides the complete details of these errors to simplify troubleshooting.

Target of the test : The eG Manager

Agent deploying the test : An internal agent

Outputs of the test : One set of results for critical eG manager function.

Configurable parameters for the test

Parameter	Description
Test period	How often should the test be executed .
Host	The host for which the test is to be configured.
Port	The port number at which the specified host listens.
AlertFile	<p>Specify the full path to the log file to be monitored. Since the trend_log is by default found in the <EG_INSTALL_DIR>\manager\logs directory, the same is displayed here by default.</p> <p>Also, instead of a specific log file path, the path to the directory containing the trend_log files can be provided - eg., <i>/opt/egurkha/manager/logs</i>. This ensures that eG Enterprise monitors the most recent log files in the specified directory. Specific log file name patterns can also be specified. For example, to monitor the latest log files with names containing the string trend_log, the parameter specification can be, <i>/opt/egurkha/manager/*trend_log*</i>. Here, '*' indicates leading/trailing characters (as the case may be). In this case, the eG agent first enumerates all the log files in the specified path that match the given pattern, and then picks only the latest log file from the result set for monitoring.</p> <p>Every time this test is executed, the eG agent verifies the following:</p> <ul style="list-style-type: none"> • Whether any changes have occurred in the size and/or timestamp of the log files that were monitoring during the last measurement period;

Parameter	Description
	<ul style="list-style-type: none"> Whether any new log files (that match the AlertFile specification) have been newly added since the last measurement period; If a few lines have been added to a log file that was monitored previously, then the eG agent monitors the additions to that log file, and then proceeds to monitor newer log files (if any). If an older log file has been overwritten, then, the eG agent monitors this log file completely, and then proceeds to monitor the newer log files (if any).
SearchPattern	<p>Enter the specific patterns of alerts to be monitored. The pattern should be in the following format: <code><PatternName>:<Pattern></code>, where <code><PatternName></code> is the pattern name that will be displayed in the monitor interface and <code><Pattern></code> is an expression of the form - <code>*expr* or expr or *expr or expr*</code>, etc. A leading '*' signifies any number of leading characters, while a trailing '*' signifies any number of trailing characters.</p> <p>Multiple search patterns can be specified as a comma-separated list. If you want all the messages in a log file to be monitored, then your specification would be: <code><PatternName>.*</code>.</p>
	<p>By default, this test monitors error and warning events logged in the <code>trend_log</code> file. Therefore, the default SearchPattern is set as: <code>error:*ERROR*,warn:*WARN*</code>. This indicates that by default, the test will monitor only those lines in the <code>trend_log</code> which embed the strings <code>ERROR</code> and <code>WARN</code>.</p>
Lines	<p>Specify two numbers in the format <code>x:y</code>. This means that when a line in the alert file matches a particular pattern, then <code>x</code> lines before the matched line and <code>y</code> lines after the matched line will be reported in the detail diagnosis output (in addition to the matched line). The default value here is <code>0:0</code>. Multiple entries can be provided as a comma-separated list.</p>
	<p>If you give <code>1:1</code> as the value for Lines, then this value will be applied to all the patterns specified in the SearchPattern field. If you give <code>0:0,1:1,2:1</code> as the value for Lines and if the corresponding value in the SearchPattern field is like <code>ORA:ORA-* offline:*offline*,online:*online</code> then:</p>
	<p><code>0:0</code> will be applied to <code>ORA:ORA-*</code> pattern</p>
	<p><code>1:1</code> will be applied to <code>offline:*offline*</code> pattern</p>
	<p><code>2:1</code> will be applied to <code>online:*online</code> pattern</p>
ExcludePattern	<p>Provide a comma-separated list of patterns to be excluded from monitoring in the ExcludePattern text box. For example <code>*critical*, *exception*</code>. By default, this parameter is set to <code>'none'</code>.</p>

Parameter	Description
UniqueMatch	<p>By default, the UniqueMatch parameter is set to False, indicating that, by default, the test checks every line in the log file for the existence of each of the configured SearchPattern. By setting this parameter to True, you can instruct the test to ignore a line and move to the next as soon as a match for one of the configured patterns is found in that line. For example, assume that Pattern1: *fatal*, Pattern2: *error* is the SearchPattern that has been configured. If UniqueMatch is set to False, then the test will read every line in the log file completely to check for the existence of messages embedding the strings 'fatal' and 'error'. If both the patterns are detected in the same line, then the number of matches will be incremented by 2. On the other hand, if UniqueMatch is set to True, then the test will read a line only until a match for one of the configured patterns is found and not both. This means that even if the strings 'fatal' and 'error' follow one another in the same line, the test will consider only the first match and not the next. The match count in this case will therefore be incremented by only 1.</p>
RotatingFile	<p>This flag governs the display of descriptors for this test in the eG monitoring console. This flag is set to False by default. In this case, the descriptors of the test will be of the following format: <i><Alert_file_name>:<SearchPattern></i>.</p> <p>If this flag is set to True and the AlertFile text box contains the full path to a specific (log/text) file, then, the descriptors of this test will be displayed in the following format: <i>DirectoryContainingMonitoredFile:<SearchPattern></i>. Since the AlertFile parameter is set to /manager/logs/trend_log by default in the case of this test, setting the RotatingFile to true will display descriptors in the following format in the eG monitoring console: <i>/manager/logs/trend_log:<SearchPattern></i>.</p> <p>On the other hand, if this flag is set to True and the AlertFile parameter is set to the directory containing log files (say, /manager/logs), then, the descriptors of this test will be displayed in the format: <i>Configured_directory_path:<SearchPattern></i> - i.e., <i>/manager/logs:<SearchPattern></i>. On the other hand, if the RotatingFile parameter had been set to false, then the descriptors will be of the following format: <i>Configured_directory:<SearchPattern></i> - i.e., <i>logs:<SearchPattern></i> in the case of the example above.</p> <p>If this flag is set to True and the AlertFile parameter is set to a specific file pattern, then, the descriptors of this test will be of the following format: <i><FilePattern>:<SearchPattern>. /opt/egurkha/manager/*trend_log*</i>, and rotatingfile is set to True, then, your descriptor will be: <i>*trend_log*<SearchPattern></i>. In this case, the descriptor format will not change even if the RotatingFile flag status is changed .</p>
CaseSensitive	<p>This flag is set to No by default. This indicates that the test functions in a 'case-insensitive' manner by default. This implies that, by default, the test ignores the case of</p>

Parameter	Description
	<p>your AlertFile and SearchPattern specifications. If this flag is set to Yes on the other hand, then the test will function in a 'case-sensitive' manner. In this case therefore, for the test to work, even the case of your AlertFile and SearchPattern specifications should match with the actual.</p>
OverwrittenFile	<p>By default, this flag is set to False. Set this flag to true if you want the test to support the 'roll over' capability of the specified AlertFile. A roll over typically occurs when the timestamp of a file changes or when the log file size crosses a pre-determined threshold. When a log file rolls over, the errors/warnings that pre-exist in that file will be automatically copied to a new file, and all errors/warnings that are captured subsequently will be logged in the original/old file. For instance, say, errors and warnings were originally logged to a file named trend_log. When a roll over occurs, the content of the file trend_log will be copied to a file named trend_log.1, and all new errors/warnings will be logged trend_log. In such a scenario, since the overwrittenfile flag is set to false by default, the test by default scans only trend_log.1 for new log entries and ignores trend_log. On the other hand, if the flag is set to true, then the test will scan both trend_log and trend_log.1 for new entries.</p>
	<p>If you want this test to support the 'roll over' capability described above, the following conditions need to be fulfilled:</p>
	<ul style="list-style-type: none"> The AlertFile parameter has to be configured only with the name and/or path of one/more alert files. File patterns or directory specifications should not be specified in the AlertFile text box. The roll over file name should be of the format: "<AlertFile>.1", and this file must be in the same directory as the AlertFile.
DD Frequency	<p>Refers to the frequency with which detailed diagnosis measures are to be generated for this test. The default is 1:1. This indicates that, by default, detailed measures will be generated every time this test runs, and also every time the test detects a problem. You can modify this frequency, if you so desire. Also, if you intend to disable the detailed diagnosis capability for this test, you can do so by specifying <i>none</i> against DD frequency.</p>
Detailed Diagnosis	<p>To make diagnosis more efficient and accurate, the eG Enterprise suite embeds an optional detailed diagnostic capability. With this capability, the eG agents can be configured to run detailed, more elaborate tests as and when specific problems are detected. To enable the detailed diagnosis capability of this test for a particular server, choose the On option. To disable the capability, click on the Off option.</p>
	<p>The option to selectively enable/disable the detailed diagnosis capability will be available only if the following conditions are fulfilled:</p>

Parameter	Description
	<ul style="list-style-type: none"> The eG manager license should allow the detailed diagnosis capability Both the normal and abnormal frequencies configured for the detailed diagnosis measures should not be 0.

Measurements made by the test

Measurement	Description	Measurement Unit	Interpretation
Recent messages	Indicates the number of messages matching the specified SearchPattern that were recently logged in the specified AlertFile.	Number	The detailed diagnosis of this measure sheds light on the nature of errors that occurred when trends were computed.

The detailed diagnosis of the *Recent messages* measure provides the complete details of the errors logged in the **trend_log** file.

Detailed Diagnosis Measure Graph Summary Graph Trend Graph Fix History Fix Feedback

Component: eG_Mgr26:13600
Test: eG Trend Log
Description: trend_log:error
Timeline: 4 days From: Feb 17, 2012 Hr: 18 Min: 25 To: Feb 21, 2012 Hr: 18 Min: 25

Measured By: eG_Mgr26

Measurement: Recent messages

Lists recent messages

TIME	MESSAGES
Feb 20, 2012 13:51:44	20/02/2012 13:50:12 INFO EgTrendManager ComputeTrends - currentTests are [HttpTest, NetworkTest, OSMemoryTest,JvmClassInfoTest, JvmCpuTest, JvmGCDetailsTest, JvmThreadTest, JvmMemPoolGCTest, JvmUptimeTest, JvmMemoryDetailsTest, JvmFileDescriptorTest, JmxConnectorTest, UptimeTest, TcpTest, NetworkTrafficTest, SystemTest, DiskActivityTest, EgErrorLogTest, EgThreshLogTest, EgTrendLogTest, EgConnectionPoolTest, EgObjectPoolTest, EgCleanupTest, ProcessTest, EgUserInfoTest, EgUserSessionTest, EgAgentInfoTest, EgDBTableInfoTest, EgStateManagerInfoTest, EgThresholdManagerTest, EgTrendManagerTest, EgServletletInfoTest] 20/02/2012 13:50:12 INFO EgTrendManager Compute Trends for ErrorReportTest 20/02/2012 13:50:12 INFO EgTrendManager Compute Trends for EgErrorLogTest 20/02/2012 13:50:12 INFO EgTrendManager Is current test: EgErrorLogTest 20/02/2012 13:50:12 INFO EgTrendManager Unique combinations for EgErrorLogTest = 2 20/02/2012 13:50:12 INFO EgTrendManager hourly start EgErrorLogTest eG_Mgr26:13600+error_log:warning:NULL for 19/02/2012 13:49:13 20/02/2012 13:50:12 INFO EgTrendManager daily starts EgErrorLogTest eG_Mgr26:13600+error_log:warning:NULL for 19/02/2012 13:49:13 20/02/2012 13:50:12 INFO EgTrendManager hourly ends EgErrorLogTest eG_Mgr26:13600+error_log:warning:NULL for 19/02/2012 13:49:13 20/02/2012 13:50:12 INFO EgTrendManager capacity is not enabled: EgErrorLogTest 20/02/2012 13:50:12 INFO EgTrendManager hourly start EgErrorLogTest eG_Mgr26:13600+error_log:warning:NULL for 19/02/2012 13:49:13

Figure 2.24: The detailed diagnosis of the Recent messages measure of the eG Trend Log test

2.3.12 Trend manager process Test

The **eG Trend manager process** uses the raw measurement data in the eG database to compute hourly, daily, weekly, and monthly summaries and performance averages, and stores these computations in trend tables. Users to the eG monitoring and reporting consoles can query the data in the trend tables to generate trend graphs and reports. These graphs/reports enable administrators to clearly understand the historical trends in performance, on the basis of which they can accurately predict future performance and effectively plan the future capacity of the environment. Using this test, you can understand how efficient the trend manager process is. The test reports the current status of this process, points you to trend computation failures and where they occurred, and reveals slowdowns in trend computation (if any).

Target of the test : The eG Manager

Agent deploying the test : An internal/remote agent

Outputs of the test : One set of results for the eG manager being monitored.

Configurable parameters for the test

Parameter	Description
Test period	How often should the test be executed .
Host	The host for which the test is to be configured.
Port	The port number at which the specified host listens.
JMX Remote Port	Here, specify the port at which the JMX listens for requests from remote hosts. In the <code><EG_MANAGER_INSTALL_DIR>\manager</code> directory (on Windows; on Unix, this will be the <code>/opt/egurkha/manager</code> directory) of the eG manager, you will find a management.properties file. Set the port defined against the com.sun.management.jmxremote.port parameter of the file as the JMX Remote Port.
User, Password, and By default, JMX requires no authentication or security. Therefore, the User, Password , Confirm Password and Confirm Password parameters are set to <i>none</i> by default.	
JNDIName	The JNDIName is a lookup name for connecting to the JMX connector. By default, this is <i>jmxrmi</i> . If you have registered the JMX connector in the RMI registry using a different lookup name, then you can change this default value to reflect the same.
JMX Provider	This test uses a JMX Provider to access the MBean attributes of the eG manager and collect metrics. Specify the package name of this JMX Provider here. By default, this is set to com.sun.jmx.remote.protocol .

Parameter	Description
Timeout	Specify the duration (in seconds) for which this test should wait for a response from the eG manager. If there is no response from the eG manager beyond the configured duration, the test will timeout. By default, this is set to 240 seconds.
Threshold Duration of Test	This test reports a <i>Successful trend tests</i> measure, which indicates the number of tests for which the trend manager successfully computed hourly, daily, weekly, and monthly trends. The detailed diagnosis of this measure, if enabled, will by default list only the top-10 successful trend tests, arranged in the descending order of the time taken by the trend manager to compute trends on them. To arrive at this top-10 list, the test considers only those successful tests for which the trend manager took more than 1 minute (by default) for trend computation. This is why, the Threshold Duration of Test parameter is set to 1 (minute) by default. This default setting can be overridden by specifying a duration (in minutes) of your choice in the Threshold Duration of Test text box. For instance, if you specify 5 here, then, the detailed diagnosis will list the top-10 (by default) successful trend tests for which the trend manager took more than 5 minutes for trend computation.
Top Time Taken Test	As already mentioned, the detailed diagnosis of the <i>Successful trend tests</i> measure, by default, lists the top-10 successful trend tests, arranged in the descending order of the time taken by the trend manager to compute thresholds on them. This is why, the Top Time Taken Test is set to 10 by default. To view more or a less number of successful trend tests in the detailed diagnosis, specify a different value in the Top Time Taken Test box. For instance, if 20 is specified here, then the detailed diagnosis will list the top-20 successful trend tests.
Detailed Diagnosis	<p>To make diagnosis more efficient and accurate, the eG Enterprise suite embeds an optional detailed diagnostic capability. With this capability, the eG agents can be configured to run detailed, more elaborate tests as and when specific problems are detected. To enable the detailed diagnosis capability of this test for a particular server, choose the On option. To disable the capability, click on the Off option.</p> <p>The option to selectively enable/disable the detailed diagnosis capability will be available only if the following conditions are fulfilled:</p> <ul style="list-style-type: none"> • The eG manager license should allow the detailed diagnosis capability • Both the normal and abnormal frequencies configured for the detailed diagnosis measures should not be 0.

Measurements made by the test

Measurement	Description	Measurement Unit	Interpretation												
Trending status	Indicates the current status of the trend manager process.		<p>The values that this measure reports and the numeric values that correspond to them have been discussed in the table below:</p> <table border="1"> <thead> <tr> <th>Measure Value</th><th>Numeric Value</th></tr> </thead> <tbody> <tr> <td>Running</td><td>0</td></tr> <tr> <td>Sleeping</td><td>1</td></tr> <tr> <td>Error</td><td>2</td></tr> <tr> <td>Not Started</td><td>3</td></tr> <tr> <td>Interrupted</td><td>4</td></tr> </tbody> </table> <p>Note:</p> <p>By default, this measure reports the Measure Values listed in the table above to indicate the current status of the trend manager process. The graph of this measure however, represents the same using the numeric equivalents only.</p>	Measure Value	Numeric Value	Running	0	Sleeping	1	Error	2	Not Started	3	Interrupted	4
Measure Value	Numeric Value														
Running	0														
Sleeping	1														
Error	2														
Not Started	3														
Interrupted	4														
Time taken for trending	Indicates the total time taken by the trend manager process to perform trend computations.	Minutes	Ideally, the value of this measure should be low. A steady rise in this measure value is a cause for concern, as it indicates that the trend manager is taking too long to compute trends. This can happen if there are too many components, tests, and measurements for which trends need to be computed.												
Successful trend tests	Indicates the number of tests for which trends were computed successfully.	Number	You can use the detailed diagnosis of this measure to know the tests for which the trend data has been successfully computed.												
Failed trend tests	Indicates the number of tests for which trend	Number	The value 0 is desired for this measure. Any non-zero value is indicative of a												

Measurement	Description	Measurement Unit	Interpretation
	computation failed.		trending failure. In this case, you can use the detailed diagnosis of this measure to identify those tests for which trend computation failed and investigate the reason why. Without trend data, users may not be able to generate useful trend graphs and reports; in the absence of trend reports, capacity plans cannot be drawn accurately.
Time since last completion	Indicates the elapsed time since the last trend computation.	Minutes	Typically, trending is scheduled to take place at the end of every day. By carefully observing the values reported by this measure, you can easily find out when a scheduled trend computation cycle was missed.
Is trend running as a separate process?	Indicates whether/not the trend manager is running as a separate process.		<p>The eG manager runs as a Java process. The maximum heap memory that can be allocated to a 32-bit eG manager process is limited to 1.5 GB. The maximum heap memory allocation to a 64-bit eG manager process on the other hand, is limited to 3 GB.</p> <p>Even if the physical server on which the eG manager is installed has more memory, since it is a single Java process, the eG manager cannot exploit the additional memory available on the server. To overcome this limitation, in eG Enterprise, the critical eG manager functions such as email alert management, threshold computation, trending, and database cleanup activities can all be run as separate Java processes (i.e., in addition to the core eG manager process).</p>

Measurement	Description	Measurement Unit	Interpretation						
			<p>Removing these key functions from the core eG manager process makes additional memory available for the core eG manager functions including data reception and analysis, alarm correlation, and web-based access and reporting. This reconfiguration of the eG manager into separate Java processes allows the eG manager to make better utilization of available server hardware resources and thereby offers enhanced scalability. In turn, this allows customers to get more leverage from their existing investment in the hardware that hosts the eG manager.</p> <p>If cleanup has been configured to run as a separate Java process, then the value of this measure will be <i>Yes</i>. If not, then this measure reports the value <i>No</i>.</p> <p>The numeric values that correspond to the measure values above are as follows:</p> <table border="1" data-bbox="1019 1267 1370 1457"> <thead> <tr> <th>Measure Value</th><th>Numeric Value</th></tr> </thead> <tbody> <tr> <td>Yes</td><td>1</td></tr> <tr> <td>No</td><td>0</td></tr> </tbody> </table> <p>Note:</p> <p>By default, this measure reports the Measure Values listed in the table above to indicate whether/not the trend manager runs as a separate Java process. The graph of this measure however, represents the same using the numeric equivalents only.</p>	Measure Value	Numeric Value	Yes	1	No	0
Measure Value	Numeric Value								
Yes	1								
No	0								

Measurement	Description	Measurement Unit	Interpretation						
Has trend run today?	Indicates whether/not trend has run on this day.		<p>Typically, trending is scheduled to take place at the end of every day. If the value of this measure is Yes, it indicates that trending has run today. On the other hand, if this measure reports the value No, it indicates that trending is yet to run for that day or has not run at all.</p> <p>The numeric values that correspond to the current day's trending status are as follows:</p> <table border="1" data-bbox="1019 777 1379 960"> <thead> <tr> <th>Measure Value</th><th>Numeric Value</th></tr> </thead> <tbody> <tr> <td>Yes</td><td>1</td></tr> <tr> <td>No</td><td>0</td></tr> </tbody> </table> <p>Note:</p> <p>By default, this measure reports the Measure Values listed in the table above to indicate whether/not trending has run today. The graph of this measure however, represents the same using the numeric equivalents only.</p>	Measure Value	Numeric Value	Yes	1	No	0
Measure Value	Numeric Value								
Yes	1								
No	0								
Slow trend tests	Indicates the number of tests for which trend computation was slow.	Number	Use the detailed diagnosis of this measure to know for which tests trend computation was slow.						

2.3.13 eG Cluster Test

To ensure high availability of the eG monitoring solution, eG Enterprise offers a licensed *Redundant Manager* option. If the eG license enables this capability, then two managers can be setup to operate in an Active-Active or an Active-passive manager cluster – i.e., a secondary manager can act as an active or passive standby for the primary manager. In the event of the failure of the primary, the secondary will automatically assume the primary's role and perform all the functions of the primary – this includes receiving performance data from all eG agents, correlating the metrics, performing

state computations, sending out email/SMS alerts (if configured) to users, and providing real-time performance and problem updates via the eG management console. Since this fail over occurs seamlessly, eG administrators have no way of figuring out if the eG manager being used is indeed operating in a redundant cluster, and if so, whether it is the primary or the secondary manager of the cluster. Moreover, during the period of unavailability of the primary, the secondary stores the performance metrics it collects to a local data folder; when the primary comes back up, the secondary automatically replicates this data to the primary. The maximum capacity of this data folder is configurable. To avoid data loss, administrators should periodically check whether/not the max size setting of the data folder is sufficient; for this, they need to closely track the growth in size of the data folder. All this is possible using the **eG Cluster** test.

This test periodically checks whether the eG manager is operating in a cluster, and if so, reports what type of cluster it is. In addition, the test also reveals whether the eG manager being monitored is the primary or secondary manager in the cluster. Regardless of manager type, the test reports the number of agents that are explicitly assigned to the manager and the number of agents that are actually reporting to the manager; this way, the test points administrators to those agents that are mapped to the manager but are not actively reporting metrics and helps them initiate investigations in this regard. The test also enables administrators to track the usage of the data folder and figure out if the maximum amount of data that can be stored in that folder needs to be increased to avoid data loss during fail-over.

Target of the test : The eG Manager

Agent deploying the test : An internal/remote agent

Outputs of the test : One set of results for the eG manager being monitored.

Configurable parameters for the test

Parameter	Description
Test period	How often should the test be executed .
Host	The host for which the test is to be configured.
Port	The port number at which the specified host listens.
JMX Remote Port	Here, specify the port at which the JMX listens for requests from remote hosts. In the <code><EG_MANAGER_INSTALL_DIR>\manager</code> directory (on Windows; on Unix, this will be the <code>/opt/egurkha/manager</code> directory) of the eG manager, you will find a management.properties file. Set the port defined against the com.sun.management.jmxremote.port parameter of the file as the JMX Remote Port.

Parameter	Description
User, Password, and By default, JMX requires no authentication or security. Therefore, the User, Password , Confirm Password	User, Password, and By default, JMX requires no authentication or security. Therefore, the User, Password , Confirm Password parameters are set to <i>none</i> by default.
JNDIName	The JNDIName is a lookup name for connecting to the JMX connector. By default, this is <i>jmxrmi</i> . If you have registered the JMX connector in the RMI registry using a different lookup name, then you can change this default value to reflect the same.
JMX Provider	This test uses a JMX Provider to access the MBean attributes of the eG manager and collect metrics. Specify the package name of this JMX Provider here. By default, this is set to com.sun.jmx.remote.protocol .
Timeout	Specify the duration (in seconds) for which this test should wait for a response from the eG manager. If there is no response from the eG manager beyond the configured duration, the test will timeout. By default, this is set to 240 seconds.
DD Frequency	Refers to the frequency with which detailed diagnosis measures are to be generated for this test. The default is <i>1:1</i> . This indicates that, by default, detailed measures will be generated every time this test runs, and also every time the test detects a problem. You can modify this frequency, if you so desire. Also, if you intend to disable the detailed diagnosis capability for this test, you can do so by specifying <i>none</i> against DD frequency.
Detailed Diagnosis	<p>To make diagnosis more efficient and accurate, the eG Enterprise suite embeds an optional detailed diagnostic capability. With this capability, the eG agents can be configured to run detailed, more elaborate tests as and when specific problems are detected. To enable the detailed diagnosis capability of this test for a particular server, choose the On option. To disable the capability, click on the Off option.</p> <p>The option to selectively enable/disable the detailed diagnosis capability will be available only if the following conditions are fulfilled:</p> <ul style="list-style-type: none"> • The eG manager license should allow the detailed diagnosis capability • Both the normal and abnormal frequencies configured for the detailed diagnosis measures should not be 0.

Measurements made by the test

Measurement	Description	Measurement Unit	Interpretation
Cluster type of the manager	Indicates whether/not the eG manager is operating within a redundant		The values that this measure reports and the numeric values that correspond to them have been discussed in the

Measurement	Description	Measurement Unit	Interpretation								
	cluster, and if it is, then the type of cluster it is.		<p>table below:</p> <table border="1"> <thead> <tr> <th>Measure Value</th><th>Numeric Value</th></tr> </thead> <tbody> <tr> <td>Not supported</td><td>0</td></tr> <tr> <td>Active-Active</td><td>1</td></tr> <tr> <td>Active-Passive</td><td>2</td></tr> </tbody> </table> <p>Note:</p> <p>By default, this measure reports the Measure Values listed in the table above to indicate the current cluster type of the manager. In the graph of this measure however, the same will be represented using the numeric equivalents only.</p>	Measure Value	Numeric Value	Not supported	0	Active-Active	1	Active-Passive	2
Measure Value	Numeric Value										
Not supported	0										
Active-Active	1										
Active-Passive	2										
Is this primary manager ?	Indicates whether/not this eG manager is the primary manager in the cluster.		<p>This measure will not be reported if the 'Cluster type of the manager' is 'Not Supported'.</p> <p>The values that this measure reports and the numeric values that correspond to them have been discussed in the table below:</p> <table border="1"> <thead> <tr> <th>Measure Value</th><th>Numeric Value</th></tr> </thead> <tbody> <tr> <td>Yes</td><td>1</td></tr> <tr> <td>No</td><td>0</td></tr> </tbody> </table> <p>Note:</p> <p>By default, this measure reports the Measure Values listed in the table above to indicate whether/not the manager is the primary manager. In the graph of this measure however, the same will be represented using the numeric equivalents only.</p>	Measure Value	Numeric Value	Yes	1	No	0		
Measure Value	Numeric Value										
Yes	1										
No	0										
Is this manager	Indicates whether/not this		The values that this measure reports								

Measurement	Description	Measurement Unit	Interpretation						
running ?	manager is currently running.		<p>and the numeric values that correspond to them have been discussed in the table below:</p> <table border="1"> <thead> <tr> <th>Measure Value</th><th>Numeric Value</th></tr> </thead> <tbody> <tr> <td>Yes</td><td>1</td></tr> <tr> <td>No</td><td>0</td></tr> </tbody> </table> <p>Note:</p> <p>By default, this measure reports the Measure Values listed in the table above to indicate whether/not the manager is running. In the graph of this measure however, the same will be represented using the numeric equivalents only.</p>	Measure Value	Numeric Value	Yes	1	No	0
Measure Value	Numeric Value								
Yes	1								
No	0								
Is other manager in the cluster running ?	Indicates whether/not the other manager in the cluster is currently running or not.		<p>The values that this measure reports and the numeric values that correspond to them have been discussed in the table below:</p> <table border="1"> <thead> <tr> <th>Measure Value</th><th>Numeric Value</th></tr> </thead> <tbody> <tr> <td>Yes</td><td>1</td></tr> <tr> <td>No</td><td>0</td></tr> </tbody> </table> <p>Note:</p> <p>By default, this measure reports the Measure Values listed in the table above to indicate whether/not the other manager in the cluster is running. In the graph of this measure however, the same will be represented using the numeric equivalents only.</p>	Measure Value	Numeric Value	Yes	1	No	0
Measure Value	Numeric Value								
Yes	1								
No	0								
Data storage on this manager	Indicates whether/not data is currently stored in this manager for transmission to the other		<p>The values that this measure reports and the numeric values that correspond to them have been discussed in the table below:</p>						

Measurement	Description	Measurement Unit	Interpretation								
	manager in the cluster.		<table border="1"> <thead> <tr> <th>Measure Value</th><th>Numeric Value</th></tr> </thead> <tbody> <tr> <td>No</td><td>0</td></tr> <tr> <td>Yes</td><td>1</td></tr> <tr> <td>Uploading</td><td>2</td></tr> </tbody> </table> <p>Note: By default, this measure reports the Measure Values listed in the table above to indicate whether/not data is stored in the manager. In the graph of this measure however, the same will be represented using the numeric equivalents only.</p>	Measure Value	Numeric Value	No	0	Yes	1	Uploading	2
Measure Value	Numeric Value										
No	0										
Yes	1										
Uploading	2										
Files stored for the other manager	Indicates the number of files that are currently waiting to be sent by this manager to the other manager.	Number	<p>The amount of data that can be stored by a manager for transmission to other managers is controlled by two configuration settings - maxStoragePerFile and filesPerManager - that are present in the file eg_managers.ini located in the <code><EG_INSTALL_DIR>\manager\config</code> directory.</p> <p>The setting maxStoragePerFile defines the amount of data (in MB) that can be stored in each temporary file that is used to store data temporarily for transmission to a manager. An eG manager can store data in multiple files for transmission to another manager. Multiple files are used for storage (rather than a single file) to minimize data read/write operations to memory for transmission to the other manager. The filesPerManager setting defines</p>								

Measurement	Description	Measurement Unit	Interpretation
			<p>the maximum number of data files per manager that are used for temporary storage of data.</p> <p>By default, the maxStoragePerFile value is 0, and the filesPerManager is 0. This implies that a manager does not save data it receives from agents directly for transmission to another manager. If the maxStoragePerFile is 10 and the filesPerManager is 20, then 200MB of data can be saved for transmission to another manager.</p>
Data stored for the other manager	Indicates the amount of data currently waiting to be sent by this manager to the other manager.	MB	<p>If the value of these two measures are consistently close to the maxStoragePerFile and filesPerManager settings of the monitored eG manager, it is a clear indication that a large volume of data is being generated and readied for transmission by that manager, but its temporary storage is not been tuned adequately to handle this load. If these settings are not changed accordingly, it may result in significant data loss in the event of a manager failure.</p>
Agents assigned to the manager	Indicates the number of agents that have been explicitly assigned to this manager.	Number	
Agents reporting to this manager	Indicates the number of agents that are currently reporting metrics to this manager.	Number	

2.4 The eG Access Layer

Besides reporting the number of users registered with the eG Enterprise system and their subscription status, the tests associated with this layer also monitors the session load on the eG manager and the unique users who are logged into the manager. In addition, the layer also runs an **HTTP** test that periodically checks whether the Tomcat web server that supports the eG manager application is available, and if so, how quickly it services requests for web pages. While you can find details of the **HTTP** test in the Monitoring Web Servers document, the other tests mapped to this layer have been dealt with in the sections that follow.

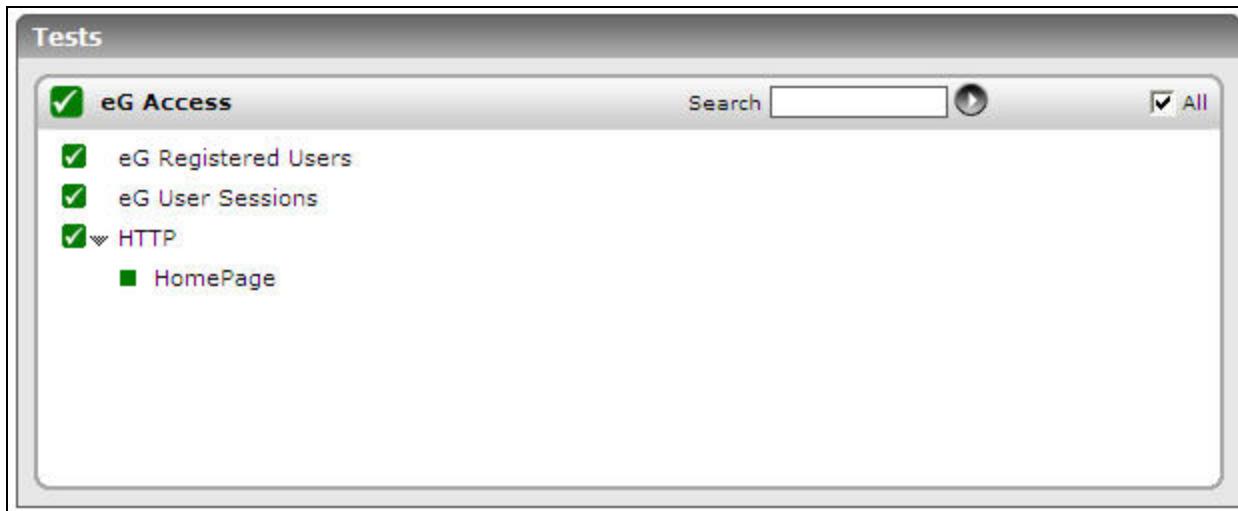


Figure 2.25: The tests mapped to the eG Access Layer

2.4.1 eG Registered Users Test

This test reports the number and type (local or domain) of users who are currently registered with the eG Enterprise system. In the process, the test highlights the following:

- The number and names of users who are newly registered;
- The number and names of users whose subscriptions are about to expire or have expired;
- The AD domains with which the eG manager integrates for managing domain user logins;

Target of the test : The eG Manager

Agent deploying the test : An internal/remote agent

Outputs of the test : One set of results for the eG manager being monitored.

Configurable parameters for the test

Parameter	Description
Test period	How often should the test be executed .
Host	The host for which the test is to be configured.
Port	The port number at which the specified host listens.
JMX Remote Port	Here, specify the port at which the JMX listens for requests from remote hosts. In the <code><EG_MANAGER_INSTALL_DIR>\manager</code> directory (on Windows; on Unix, this will be the <code>/opt/egurkha/manager</code> directory) of the eG manager, you will find a management.properties file. Set the port defined against the com.sun.management.jmxremote.port parameter of the file as the JMX Remote Port.
User, Password, and Confirm Password	By default, JMX requires no authentication or security. Therefore, the User, Password , and Confirm Password parameters are set to <i>none</i> by default.
JNDIName	The JNDIName is a lookup name for connecting to the JMX connector. By default, this is <i>jmxrmi</i> . If you have registered the JMX connector in the RMI registry using a different lookup name, then you can change this default value to reflect the same.
JMX Provider	This test uses a JMX Provider to access the MBean attributes of the eG manager and collect metrics. Specify the package name of this JMX Provider here. By default, this is set to com.sun.jmx.remote.protocol .
Timeout	Specify the duration (in seconds) for which this test should wait for a response from the eG manager. If there is no response from the eG manager beyond the configured duration, the test will timeout. By default, this is set to 240 seconds.
DD Frequency	Refers to the frequency with which detailed diagnosis measures are to be generated for this test. The default is 1:1 . This indicates that, by default, detailed measures will be generated every time this test runs, and also every time the test detects a problem. You can modify this frequency, if you so desire. Also, if you intend to disable the detailed diagnosis capability for this test, you can do so by specifying <i>none</i> against DD frequency.
Detailed Diagnosis	To make diagnosis more efficient and accurate, the eG Enterprise suite embeds an optional detailed diagnostic capability. With this capability, the eG agents can be configured to run detailed, more elaborate tests as and when specific problems are detected. To enable the detailed diagnosis capability of this test for a particular server, choose the On option. To disable the capability, click on the Off option. The option to selectively enable/disable the detailed diagnosis capability will be available only if the following conditions are fulfilled:

Parameter	Description
	<ul style="list-style-type: none"> The eG manager license should allow the detailed diagnosis capability Both the normal and abnormal frequencies configured for the detailed diagnosis measures should not be 0.

Measurements made by the test

Measurement	Description	Measurement Unit	Interpretation
Total users	Indicates the total number of users who are currently registered with the eG Enterprise system.	Number	
New users	Indicates the number of users who registered with the eG Enterprise system during the last measurement period.	Number	Use the detailed diagnosis to know which users newly registered with the eG Enterprise system.
Expired users	Indicates the number of user subscriptions that have expired.	Number	Use the detailed diagnosis to know which user subscriptions have expired.
Nearing expiry users	Indicates the number of user subscriptions that are expected to expire within the next 7 days.	Number	Use the detailed diagnosis to know which user subscriptions that are about to expire within the next seven days.
Active users	Indicates the number of user subscriptions that have not expired.	Number	
Local users	Indicates the number of local users who have registered with the eG Enterprise system.	Number	Local users are those users whose login credentials are stored in the eG database and are hence validated by the eG database while logging in.
Domain users	Indicates the number of domain users who have registered with the eG Enterprise system.	Number	The credentials of domain users are typically maintained by the AD server with which the eG manager integrates. Logins by such users will hence be validated by the AD server only.

Measurement	Description	Measurement Unit	Interpretation
Configured domains	Indicates the number of AD domains that have been configured on the eG manager.	Number	Use the detailed diagnosis to know which domains have been configured.

2.4.2 eG User Sessions Test

In environments where the eG management console is accessed by multiple concurrent users, administrators might want to know how many distinct users are logged in currently, and the total session load on the eG manager. This information would enable administrators to audit user accesses to the eG manager and instantly identify unauthorized accesses (if any) that are currently active on the manager. This test provides administrators with these session-centric insights.

Target of the test : The eG Manager

Agent deploying the test : An internal/remote agent

Outputs of the test : One set of results for the eG manager being monitored.

Configurable parameters for the test

Parameter	Description
Test period	How often should the test be executed .
Host	The host for which the test is to be configured.
Port	The port number at which the specified host listens.
JMX Remote Port	Here, specify the port at which the JMX listens for requests from remote hosts. In the <code><EG_MANAGER_INSTALL_DIR>\manager</code> directory (on Windows; on Unix, this will be the <code>/opt/egurkha/manager</code> directory) of the eG manager, you will find a management.properties file. Set the port defined against the com.sun.management.jmxremote.port parameter of the file as the JMX Remote Port.
User, Password, and Confirm Password	By default, JMX requires no authentication or security. Therefore, the User, Password , Confirm Password parameters are set to <i>none</i> by default.
JNDIName	The JNDIName is a lookup name for connecting to the JMX connector. By default, this is <i>jmxrmi</i> . If you have registered the JMX connector in the RMI registry using a different lookup name, then you can change this default value to reflect the same.

Parameter	Description
JMX Provider	This test uses a JMX Provider to access the MBean attributes of the eG manager and collect metrics. Specify the package name of this JMX Provider here. By default, this is set to com.sun.jmx.remote.protocol .
Timeout	Specify the duration (in seconds) for which this test should wait for a response from the eG manager. If there is no response from the eG manager beyond the configured duration, the test will timeout. By default, this is set to 240 seconds.
DD Frequency	Refers to the frequency with which detailed diagnosis measures are to be generated for this test. The default is 1:1 . This indicates that, by default, detailed measures will be generated every time this test runs, and also every time the test detects a problem. You can modify this frequency, if you so desire. Also, if you intend to disable the detailed diagnosis capability for this test, you can do so by specifying none against DD frequency.
Detailed Diagnosis	<p>To make diagnosis more efficient and accurate, the eG Enterprise suite embeds an optional detailed diagnostic capability. With this capability, the eG agents can be configured to run detailed, more elaborate tests as and when specific problems are detected. To enable the detailed diagnosis capability of this test for a particular server, choose the On option. To disable the capability, click on the Off option.</p> <p>The option to selectively enable/disable the detailed diagnosis capability will be available only if the following conditions are fulfilled:</p> <ul style="list-style-type: none"> • The eG manager license should allow the detailed diagnosis capability • Both the normal and abnormal frequencies configured for the detailed diagnosis measures should not be 0.

Measurements made by the test

Measurement	Description	Measurement Unit	Interpretation
Active sessions	Indicates the number of sessions that are currently active on the eG manager.	Number	This is a good indicator of the current load on the eG manager.
Failed sessions	Indicates the number of sessions that failed during the last measurement period.	Number	Use the detailed diagnosis of this measure to view the details of the sessions that failed. These details include the user who initiated the session, the IP/host name of the host

Measurement	Description	Measurement Unit	Interpretation
			from which the session originated, when the session began, and when the session last accessed the eG manager.
Unique user sessions	Indicates the number of distinct users who are currently logged into the eG manager.	Number	Use the detailed diagnosis to know which unique users are logged in.

The detailed diagnosis of the *Active sessions* measure reports the host from which the active sessions originated and the session start time.

Detailed Diagnosis Measure Graph Summary Graph Trend Graph Fix History Fix Feedback

Component: eG_Mgr26:13600 Measured By: eG_Mgr26

Test: eG Database Tables

Measurement: Active sessions

Timeline: 1 hour From: Feb 21, 2012, Hr: 17, Min: 51, To: Feb 21, 2012, Hr: 18, Min: 51 Submit

DB Table Information

TIME	FROM HOST
Feb 21, 2012 17:51:19	eG131

Figure 2.26: The detailed diagnosis of the Active sessions measure

About eG Innovations

eG Innovations provides intelligent performance management solutions that automate and dramatically accelerate the discovery, diagnosis, and resolution of IT performance issues in on-premises, cloud and hybrid environments. Where traditional monitoring tools often fail to provide insight into the performance drivers of business services and user experience, eG Innovations provides total performance visibility across every layer and every tier of the IT infrastructure that supports the business service chain. From desktops to applications, from servers to network and storage, from virtualization to cloud, eG Innovations helps companies proactively discover, instantly diagnose, and rapidly resolve even the most challenging performance and user experience issues.

eG Innovations is dedicated to helping businesses across the globe transform IT service delivery into a competitive advantage and a center for productivity, growth and profit. Many of the world's largest businesses use eG Enterprise to enhance IT service performance, increase operational efficiency, ensure IT effectiveness and deliver on the ROI promise of transformational IT investments across physical, virtual and cloud environments.

To learn more visit www.eginnovations.com.

Contact Us

For support queries, email support@eginnovations.com.

To contact eG Innovations sales team, email sales@eginnovations.com.

Copyright © 2020 eG Innovations Inc. All rights reserved.

This document may not be reproduced by any means nor modified, decompiled, disassembled, published or distributed, in whole or in part, or translated to any electronic medium or other means without the prior written consent of eG Innovations. eG Innovations makes no warranty of any kind with regard to the software and documentation, including, but not limited to, the implied warranties of merchantability and fitness for a particular purpose. The information contained in this document is subject to change without notice.

All right, title, and interest in and to the software and documentation are and shall remain the exclusive property of eG Innovations. All trademarks, marked and not marked, are the property of their respective owners. Specifications subject to change without notice.